

# ACADIA

Directional Light for MR11 or G4 Chameleon




## DESCRIPTION

The Acadia Directional Light works with MR11 lamps or G4 Chameleon lamps when used with the supplied adapter ring. It features an adjustable glare shield and the Brilliance Metal Works signature adjustment system, which allows for 22 points of articulation of the knuckle in 10 degree increments. For loose soil applications, pair the Acadia with the Impaler accessory.

## ACADIA DIRECTIONAL LIGHT

Use	<b>Uplighting, Grazing, Backlighting, and Wall Washing (When Used with 120° Lamps Only)</b>	
Finish	<b>Brass, Copper, or Black Brass (Cerakote®)</b>	
Includes	<b>ABS Mounting Stake, LightingShrink Professional Crimp and Heat Shrink Cable Connector, G4 Adapter Ring</b>	
Order With Lamp	<b>MR11, 2W, 2700K, 30°</b>	ACADIA-DL-MR11-CU ACADIA-DL-MR11-BR ACADIA-DL-MR11-BR-BLK
Order Without Lamp	<b>Fits Chameleon G4, MR11</b>	ACADIA-DL-MR11-CU-NL ACADIA-DL-MR11-BR-NL ACADIA-DL-MR11-BR-BLK-NL

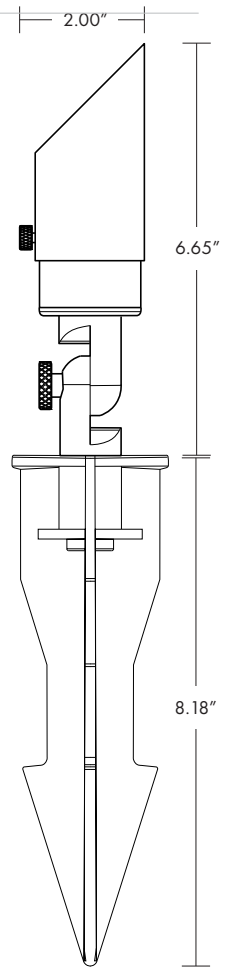

Brass (BR)



Copper (CU)



Black Brass + Cerakote®  
(BR-BLK)



**ACADIA-DL-MR11-BR-BLK**

**SOFT SOIL APPLICATIONS: INSTALLING THE GROUND STAKE & FIXTURE**

1. Connect the power cable from the fixture body to the landscape cable.
2. Lay the power cable into the slotted relief on the stake.
3. Press the fixture and stake into the ground.
4. Use a level to ensure the top of the stake is level with the ground.

**HARD SOIL APPLICATIONS: INSTALLING THE GROUND STAKE & FIXTURE**

1. Unscrew the fixture body from the stake.
2. Dig a hole approximately 4" wide by 10" deep and gently tap the stake into the ground with a rubber mallet.
3. Use a level to ensure the top of the stake is level with the ground.
4. Reinstall the fixture body onto the stake and lay the power cable into the slotted relief on the stake.
5. Connect the power cable from the fixture body to the landscape cable.

**ADJUSTING THE FIXTURE IN GENERAL AND FOR DARK SKY ORDINANCE APPLICATIONS**

1. Turn the thumbnut counter-clockwise to loosen the knuckle.
2. Rotate the fixture vertically to the preferred position.
3. Turn the thumbnut clockwise to hold it in the preferred position.

**INSTALLING THE LAMP**

1. Loosen the thumbscrew on the adjustable shield and remove it from the fixture body.
2. Unscrew the fixture body from the base.
3. Install the lamp in the socket with the tension spring behind the body of the lamp.
4. After lamp is installed, compress the tension spring as you thread the metal body into the base.
5. Return the adjustable shield to the preferred position and tighten the thumbscrew to hold it in place.