

# BUSTER + PUNCH

LONDON

## ELECTRICITY / DIMMER SWITCH

TECH SPEC



### DIMMER SWITCH

A dimmer switch with a diamond-cut knurled knob to feel amazing with every touch. The dimmer is finished with a flat plate and our signature solid metal penny buttons. Available in 5 different finishes. You can also team them up with our toggle switches, duplex and USB outlets in matching finishes.


[busterandpunch.us](http://busterandpunch.us)  
[info@busterandpunch.us](mailto:info@busterandpunch.us)






# BUSTER + PUNCH

LONDON

## 1G DIMMER SWITCH

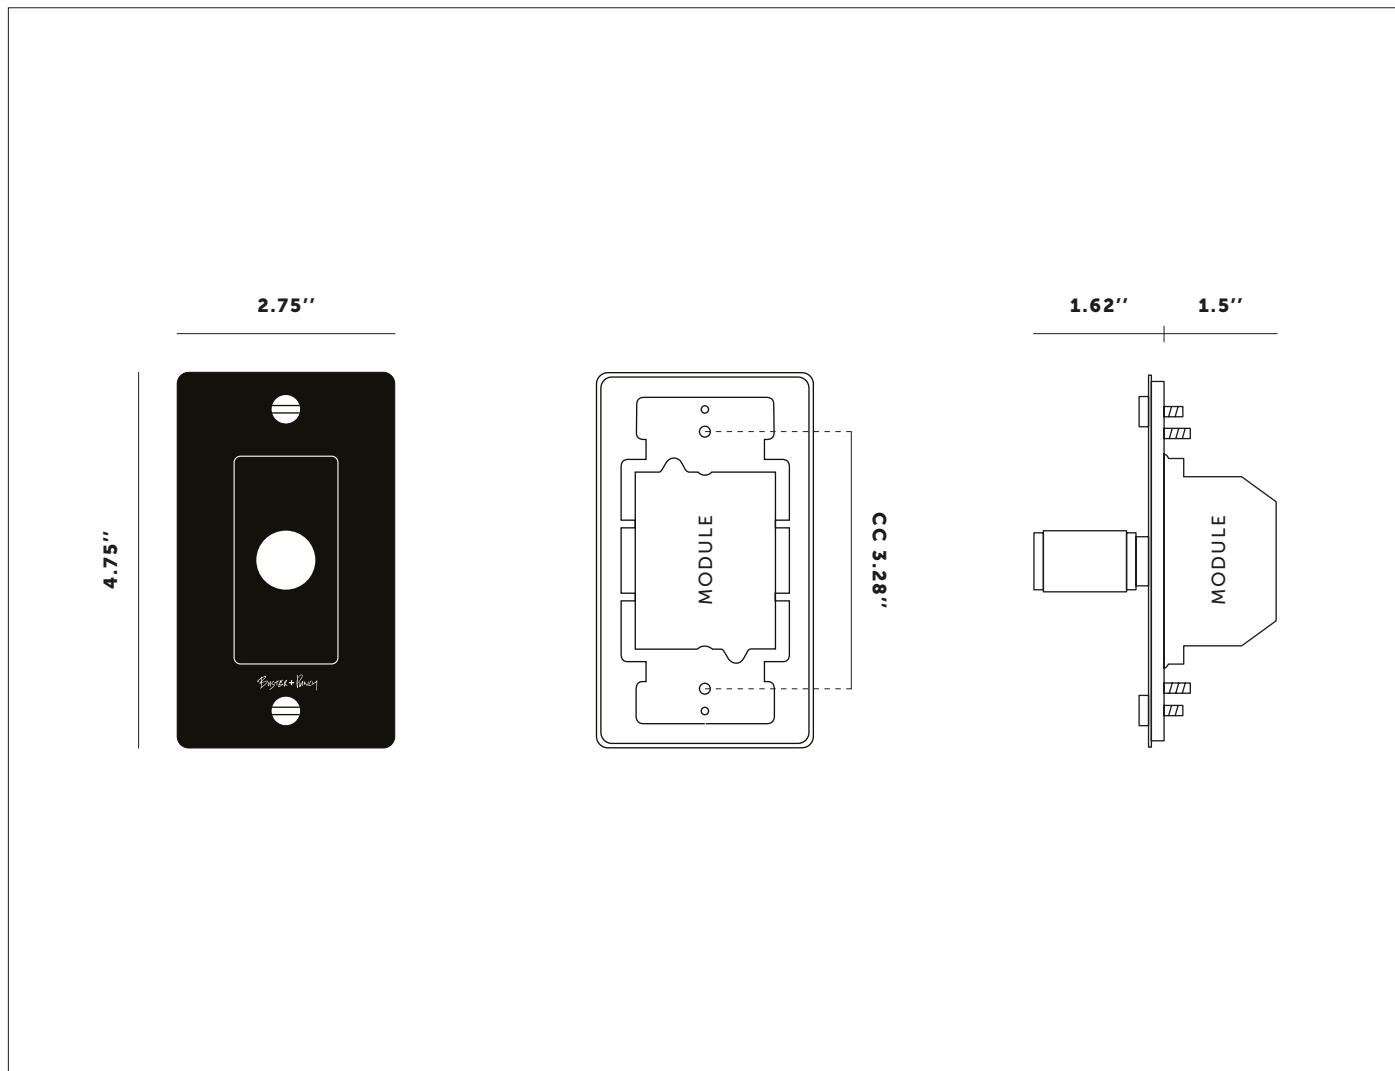TECH SPEC




FINISH	SKU	SPECIFICATIONS
 white	<b>NDR-14393</b>	Module Code: NDM-01385 (1 per unit) Style: Push ON/OFF rotary dimmer with 3 way switching Input: 100-120 VAC 60 Hz Dimming Type: Leading Edge Load: 600W max. HAL/INC / 150W max. LED Operating Temperature: 0° - 35°C / 32° - 89.6°F Humidity: 10 - 90% R.H.  Certifications: Module: cETLus 5008883 / Plates: Intertek cETLus 5012546.  <b>Care instructions</b> Wipe clean with a dry, non-abrasive microfiber cloth. Avoid use of chemical cleaners. Please note that finishes may age naturally with time and regular use.
 steel	<b>NDR-07391</b>	
 brass	<b>NDR-05390</b>	
 smoked bronze	<b>NDR-09394</b>	
 black	<b>NDR-02392</b>	

# BUSTER + PUNCH

LONDON

## 2G DIMMER SWITCH

TECH SPEC

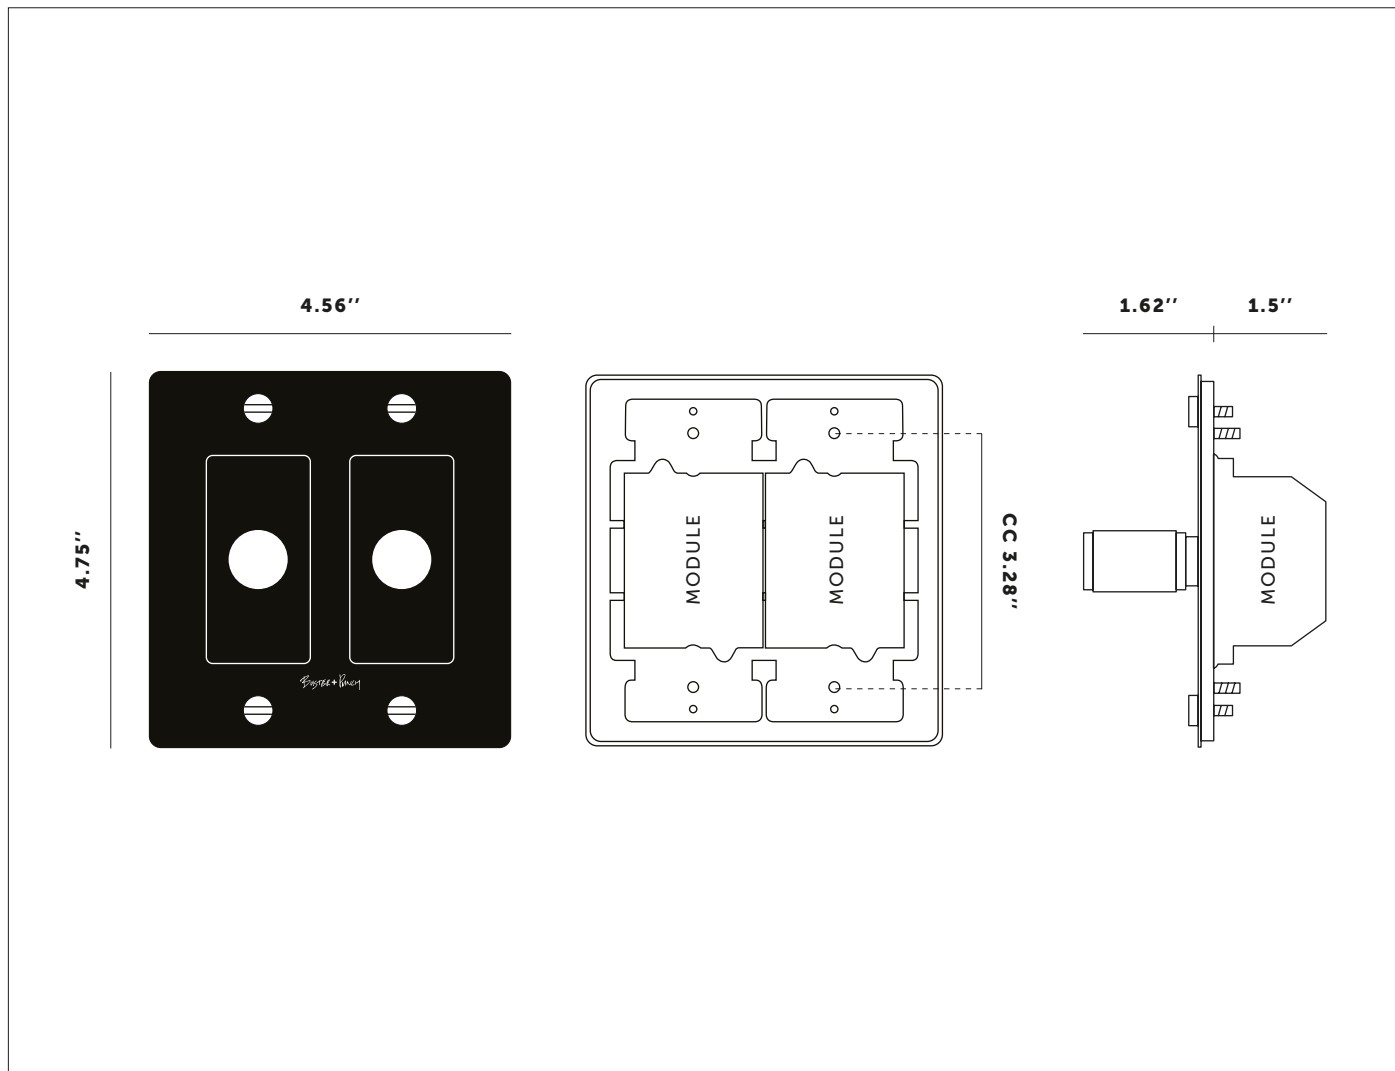

FINISH	SPECIFICATIONS
<p><b>Must be ordered through custom electricity.</b></p> <ul style="list-style-type: none"> <li><input type="checkbox"/> white</li> <li><input type="checkbox"/> steel</li> <li><input type="checkbox"/> brass</li> <li><input type="checkbox"/> smoked bronze</li> <li><input type="checkbox"/> black</li> </ul>	<p><b>Module Code:</b> NDM-01385 (2 per unit)  <b>Style:</b> Push ON/OFF rotary dimmer with 3 way switching  <b>Input:</b> 100-120VAC / 60Hz  <b>Dimming Type:</b> Leading Edge  <b>Load:</b> 600W max. HAL/INC / 150W max. LED  <b>Operating Temperature:</b> 0° - 35°C / 32° - 89.6°F  <b>Humidity:</b> 10 - 90% R.H.</p> <p><b>Certifications:</b>                  Module: cETLus / Plates: Intertek cETLus</p> <p><b>Care instructions</b>                  Wipe clean with a dry, non-abrasive microfiber cloth. Avoid use of chemical cleaners. Please note that finishes may age naturally with time and regular use.</p>

# DIMMER SWITCH

## FAQ SHEET

CATEGORY	QUESTION	ANSWER
<b>CUSTOMISE</b>	Can I customise the appearance of my dimmer?	Our dimmer modules are customisable with interchangeable 'bling kits' in 5 finishes. Please contact one of our sales representatives for more information.
<b>CUSTOMISE</b>	Can I combine different modules on the same plate?	Our plates are designed to accommodate a combination of modules, from 1-4G. Refer to our website for options, or contact one of our sales representatives for more information.
<b>DIMMER</b>	Do you offer a 4-way dimmer option?	Currently our modules are 3-way only. Please ask one of our sales team if this will be available from us in the near future.
<b>DIMMER</b>	Is this module 1-10V or 0-10V compatible?	Unfortunately 1-10V and 0-10V are not supported on this module yet. Please ask one of our sales team if this will be available from us in the near future.
<b>DIMMER</b>	My light fitting requires an LED transformer (driver) to work. Can I still use it with this dimmer?	Our module is designed for use with compatible ELV transformers. Only use for lighting circuits. Never use for dimming MLV loads. Always refer to the manufacturer's instructions.
<b>INSTALL</b>	Will this dimmer work with my existing wall box?	Please reference the key dimensions of the module and mounting holes when checking compatibility. We always recommend flush mounted wall boxes, which are widely available from major retailers.
<b>INSTALL</b>	Can I install my dimmer myself?	We strongly recommend that our products are always installed by a qualified electrician. Always refer to the safety notices within the instruction manual before attempting any electrical installation.