


BEL_4140

493041401

Wall light with a metal body, metal and glass shades, and an acrylic (PMMA) lens diffuser. Features integrated LED. The metal shade can be arranged in multiple positions, allowing for customizable designs and light effects.

Aplique con cuerpo metálico, pantallas de metal y vidrio, y difusor acrílico (PMMA). Incorpora LED integrado. La pantalla metálica se puede colocar en múltiples posiciones, lo que permite personalizar diseños y efectos de luz.

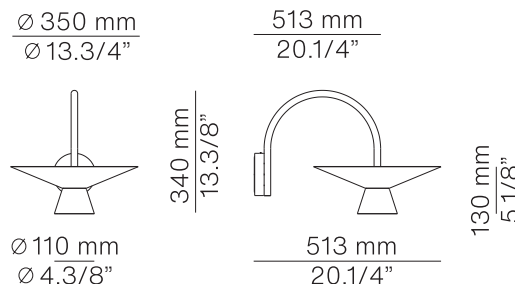

Warning

PRODUCT IS TO BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY.

LE PRODUIT DOIT ÊTRE INSTALLÉ PAR UN ÉLECTRICIEN QUALIFIÉ UNIQUEMENT.

EL PRODUCTO DEBE SER INSTALADO SOLO POR UN ELECTRICISTA CUALIFICADO.

The light source of this luminaire is not replaceable. Once the light source's lifecycle ends, you must contact the manufacturer for repairs.

The flexible outer cable of this luminaire cannot be replaced; in the event of damage, the luminaire must be discarded or sent to the factory for repair.

WE RECOMMEND READING THE INSTRUCTIONS ENTIRELY BEFORE STARTING YOUR INSTALLATION
PLEASE SAVE THESE INSTRUCTIONS SO THAT YOU CAN REFER TO THEM AT A LATER TIME

* Do not look directly into any LED source.

* Make sure the power has been disconnected before installing the fixture.

* For indoor use only.

* Do not use alcohol or solvents to clean the lamp.

* For your convenience, assembly by two people is recommended.

La fuente de luz no es reemplazable. Cuando alcance el final de su vida, debe ponerse en contacto con el fabricante para su reparación. El cable flexible exterior de esta luminaria no puede sustituirse; en el caso de que esté dañado, la luminaria debe enviada a fábrica para su reparación.

LE RECOMENDAMOS LEA LAS INSTRUCCIONES ANTES DE PROCEDER A LA INSTALACIÓN
GUARDE LAS INSTRUCCIONES PARA FUTURAS REFERENCIAS

* No mirar directamente a los LED.

* Asegúrese de que la corriente está desconectada antes de conectar el aparato.

* Para uso en interiores.

* Para limpieza no utilizar alcohol ni disolventes.

* Recomendamos la intervención de 2 personas para el montaje de la lámpara.



UL 1598 ELECTRICAL INSTRUCTIONS FOR FLUSHMOUNTS, WALL SCONCES AND PENDANTS

SAVE THESE INSTRUCTIONS. MIN 90C SUPPLY CONDUCTORS. CAUTION-RISK OF FIRE. USE STATED WATT OR SMALLER. CAUTION-RISK OF SHOCK. DISCONNECT POWER BEFORE SERVICING. TO REDUCE THE RISK OF A BURN DURING RELAMPING, ALLOW THE BULB TO COOL DOWN. SUITABLE FOR DAMP LOCATION. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARD INVOLVED.

WARNING: ALL WIRES AND WIRE NUTS USED IN THE INSTALLATION MUST BE RATED 195F (90°C). FOR INDOOR USE ONLY. THESE PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN.

Assembly instructions / Instrucciones

- 1 - Unscrew the upper screw (A) and separate the canopy (B) from the mounting bracket (C).

Figure 1.

- 1 - Desenroscar el tornillo superior (A) del tapapared (B) y liberar la sujeción (C).

Figura 1.

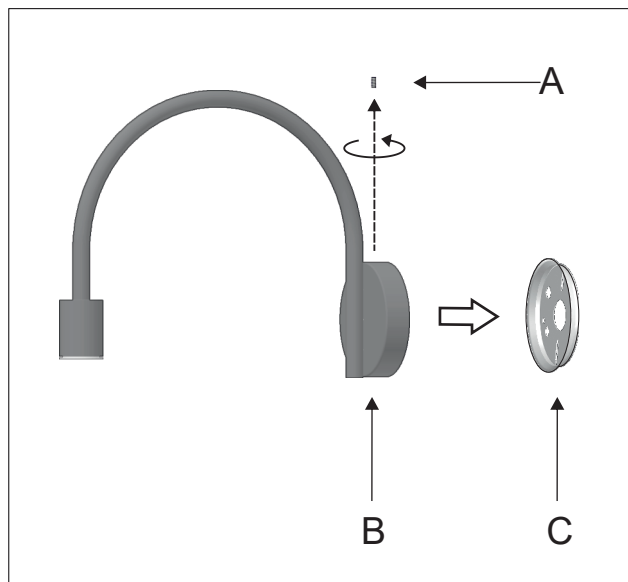


Figure 1

2A - WITHOUT JUNCTION BOX (INTERNATIONAL)

Insert the power cables (D) through the central hole of the mounting bracket (C) and fix it to the wall. Connect the electrical wires with a terminal block.

Figure 2A.

2A - SIN CAJA DE CONEXIONES (INTERNACIONAL)

Introducir los cables de la red (D) por el agujero central de la sujeción (C) y fijarla a la pared. Realizar las conexiones eléctricas con una regleta básica.

Figura 2A.

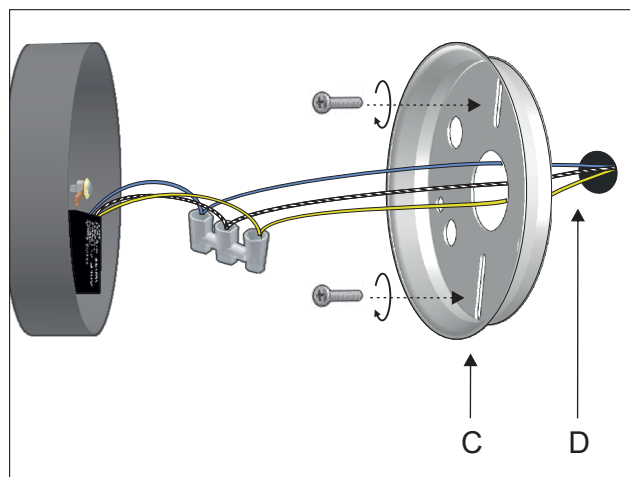


Figure 2A

2B - WITH JUNCTION BOX (USA)

Insert the electrical wires (E) through the central hole of the mounting bracket (C) and make the connections inside of the junction box (F). Fix the mounting bracket to the junction box.

Figure 2B.

2B - CON CAJA DE CONEXIONES (USA)

Pasar los cables de eléctricos (E) por el agujero central de la sujeción (C) y realizar las conexiones dentro de la caja de conexiones (F). Fijar la sujeción a la caja de conexiones.

Figura 2B.

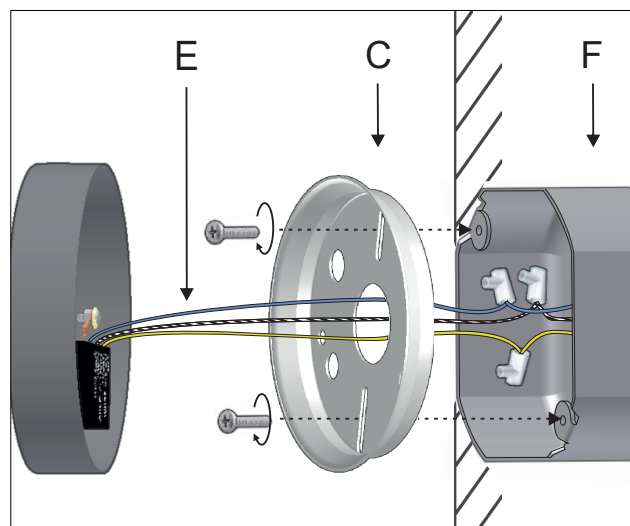


Figure 2B

3 - Attach the canopy (B) back to the mounting bracket (C) and fix it with the screw (A) that was previously removed.

Figure 3.

3 - Volver a colocar el tapapared (B) en la sujeción (C) y fijarla con el tornillo (A) liberado anteriormente.

Figura 3.

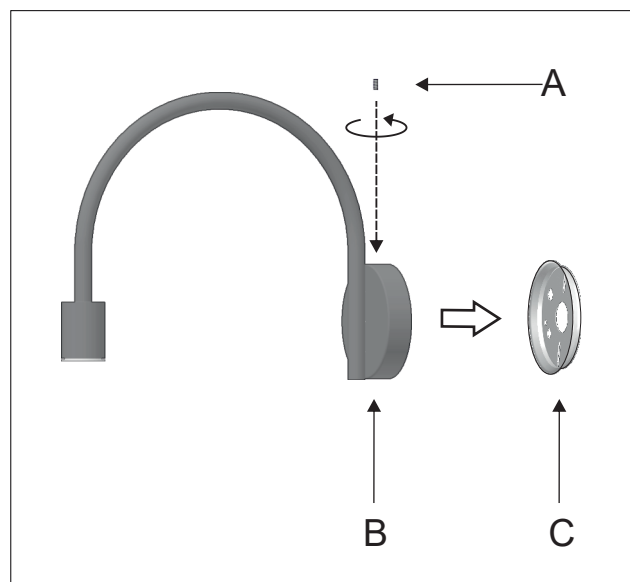


Figure 3

4 - Unscrew the head cap (L) from the lamp's body (G), and the optic lens (M) from the head cap (L). This optic lens (M) is only used with the version without the glass shade (H). For the versions with the glass shade, the optic lens (J) must be used. The metal shade (K) can be installed facing up or down, depending on the design. Once the final composition has been decided, screw the optic lens (M or J) to the head cap (L) and this cap to the lamp's body (G). This will hold all the parts in place. Figure 4.

4 - Desenroscar el casquillo embellecedor (L) del cuerpo de la lámpara (G), y la óptica (M) del casquillo (L). Esta óptica (M) solo se utiliza con la versión sin pantalla de cristal (H). Para las versiones con pantalla de cristal se debe utilizar la óptica (J). La pantalla metálica (K) se puede instalar hacia arriba o hacia abajo según el diseño. Una vez decidida la composición final, roscar la óptica (M o J) al casquillo embellecedor (L) y este al cuerpo de la lámpara (G) para fijar las pantallas (H y K). Figura 4.

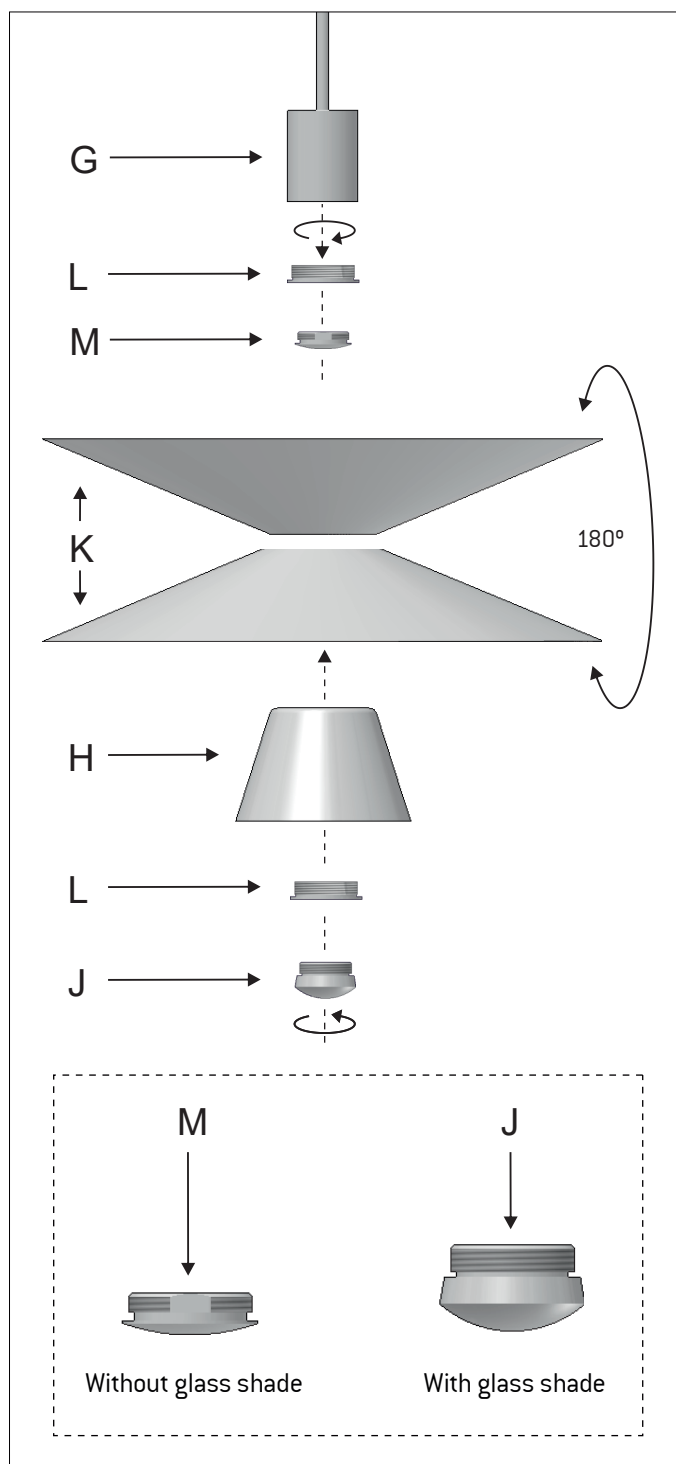


Figure 4