


Bowee

Werner Aisslinger

Bowee F

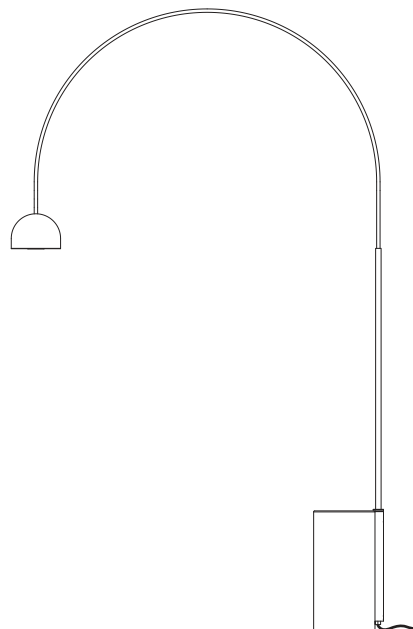

ADVERTENCIAS



- Se recomienda que la instalación sea realizada por un profesional.
- Se recomienda que la instalación sea realizada como mínimo entre dos personas.
- Desconectar la conexión a red antes de ser manipulada.
- Si el cable de la luminaria está dañado, deberá sustituirse exclusivamente por el fabricante o su servicio técnico.
- La fuente de luz de esta luminaria debe reemplazarse únicamente por el fabricante o su servicio técnico, o por una persona cualificada equivalente con objeto de evitar cualquier riesgo.
- Para limpiar la luminaria, utilizar un paño suave humedecido con agua y, si fuera necesario, detergente neutro. No usar alcohol u otros disolventes.
- Para la opción de regulación con Casambi, descargar la aplicación. Para más información ir a la web www.casambi.com

WARNING

- The light should be installed by a professional electrician.
- The light should be installed by at least two people.
- Disconnect from the power system before handling the light.
- If the lamp cable is damaged, it should only be replaced by the manufacturer or its technical service.
- The light source of this lamp should only be replaced by the manufacturer, its technical service or a similarly qualified person, in order to prevent risks.
- To clean the lamp, use a soft cloth dampened with water and, if necessary, neutral soap. Do not use alcohol or other solvents.
- To use the dimming option with Casambi, please download the app. For more information, visit www.casambi.com.


HINWEISE

- Wir empfehlen, die Installation von einem Fachmann vornehmen zu lassen.
- Wir empfehlen, die Installation von mindestens zwei Personen durchführen zu lassen.
- Unterbrechen Sie die Verbindung zum Netz vor Beginn der Arbeiten.
- Wenn das Kabel der Leuchte beschädigt ist, darf es ausschließlich vom Hersteller oder dessen technischem Dienst ausgewechselt werden.
- Die Lichtquelle dieser Leuchte darf ausschließlich vom Hersteller oder dessen technischem Dienst bzw. einer Person mit vergleichbaren Qualifikationen ausgetauscht werden, um jedwedes Risiko zu vermeiden.
- Zur Reinigung der Leuchte empfiehlt es sich, ein weiches, mit Wasser und, falls nötig, neutralem Reinigungsmittel befeuchtetes Tuch zu verwenden. Keinen

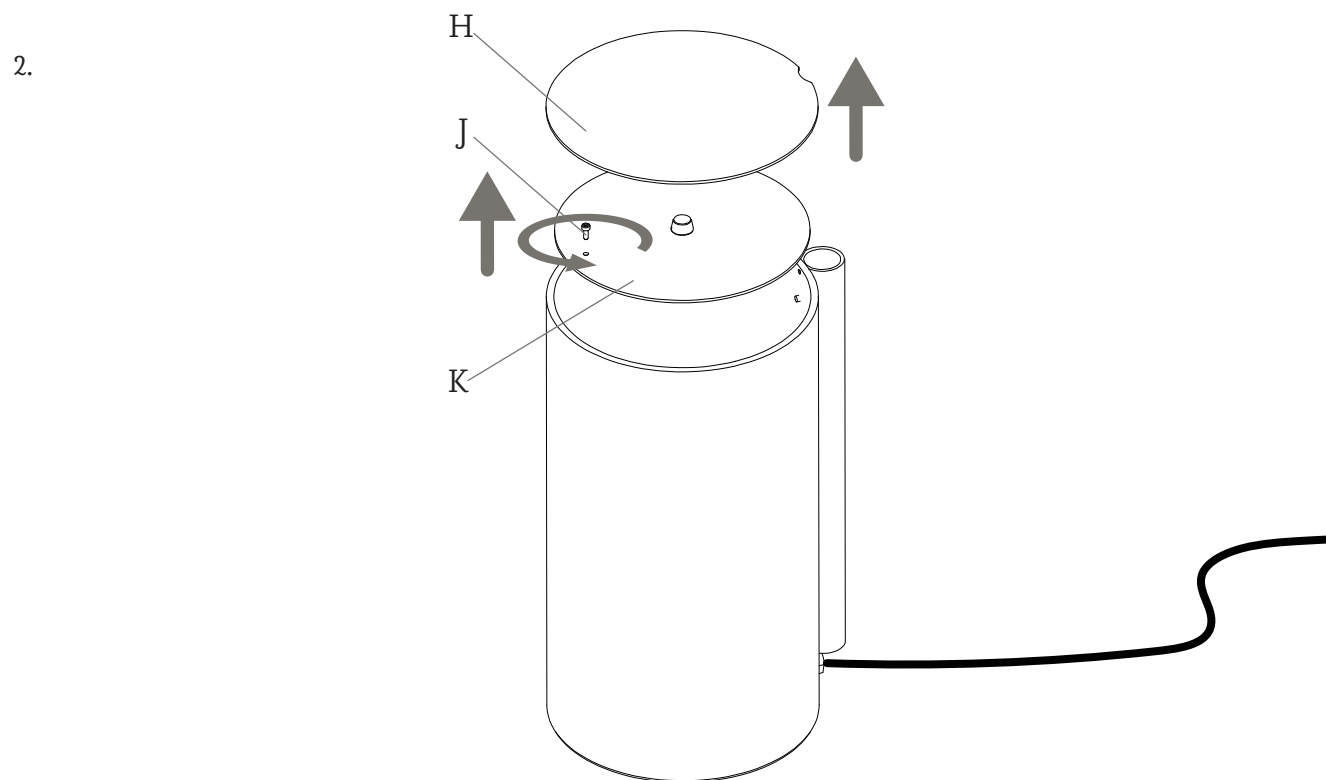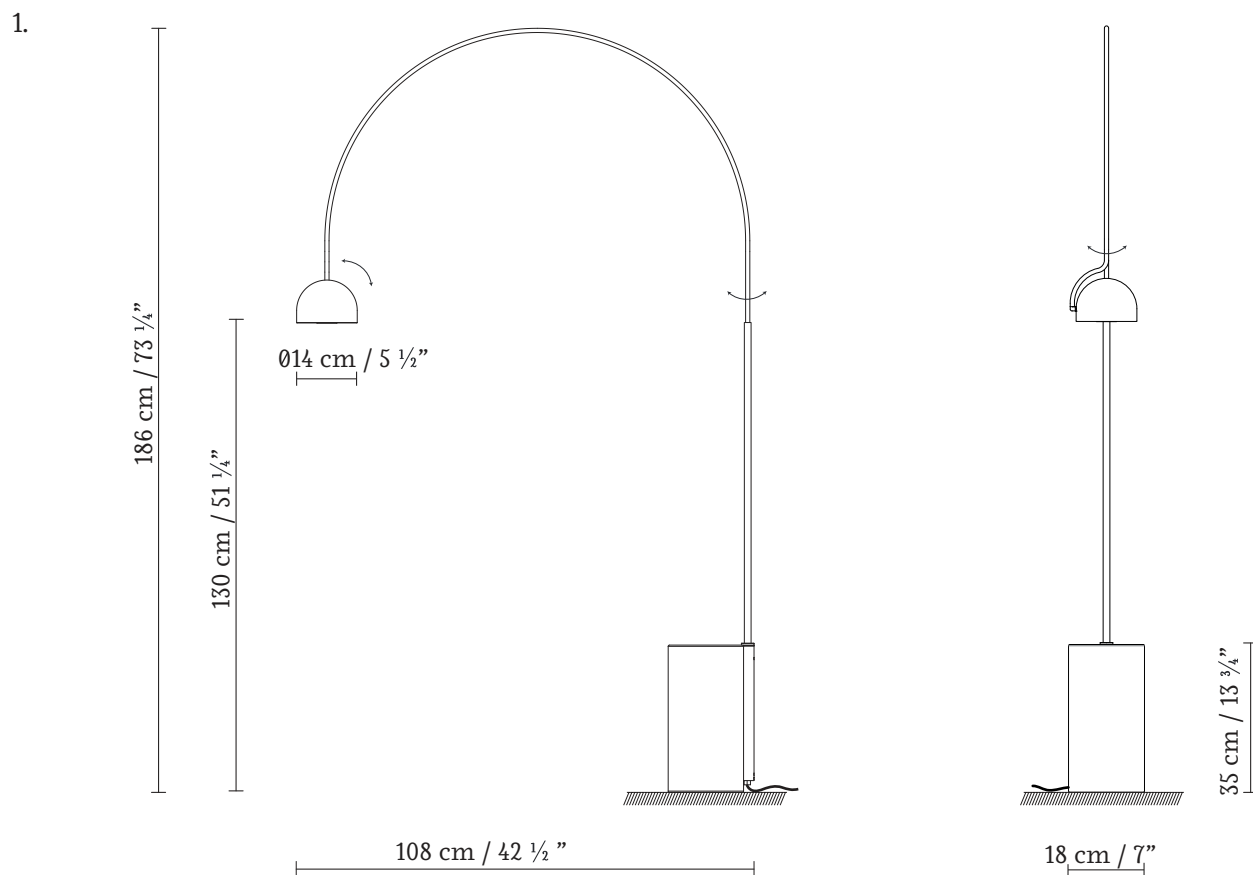

1. General size of the lamp.
2. . Remove the cover (H) from the base, unscrew (J) and remove the inner cover (K).

3.

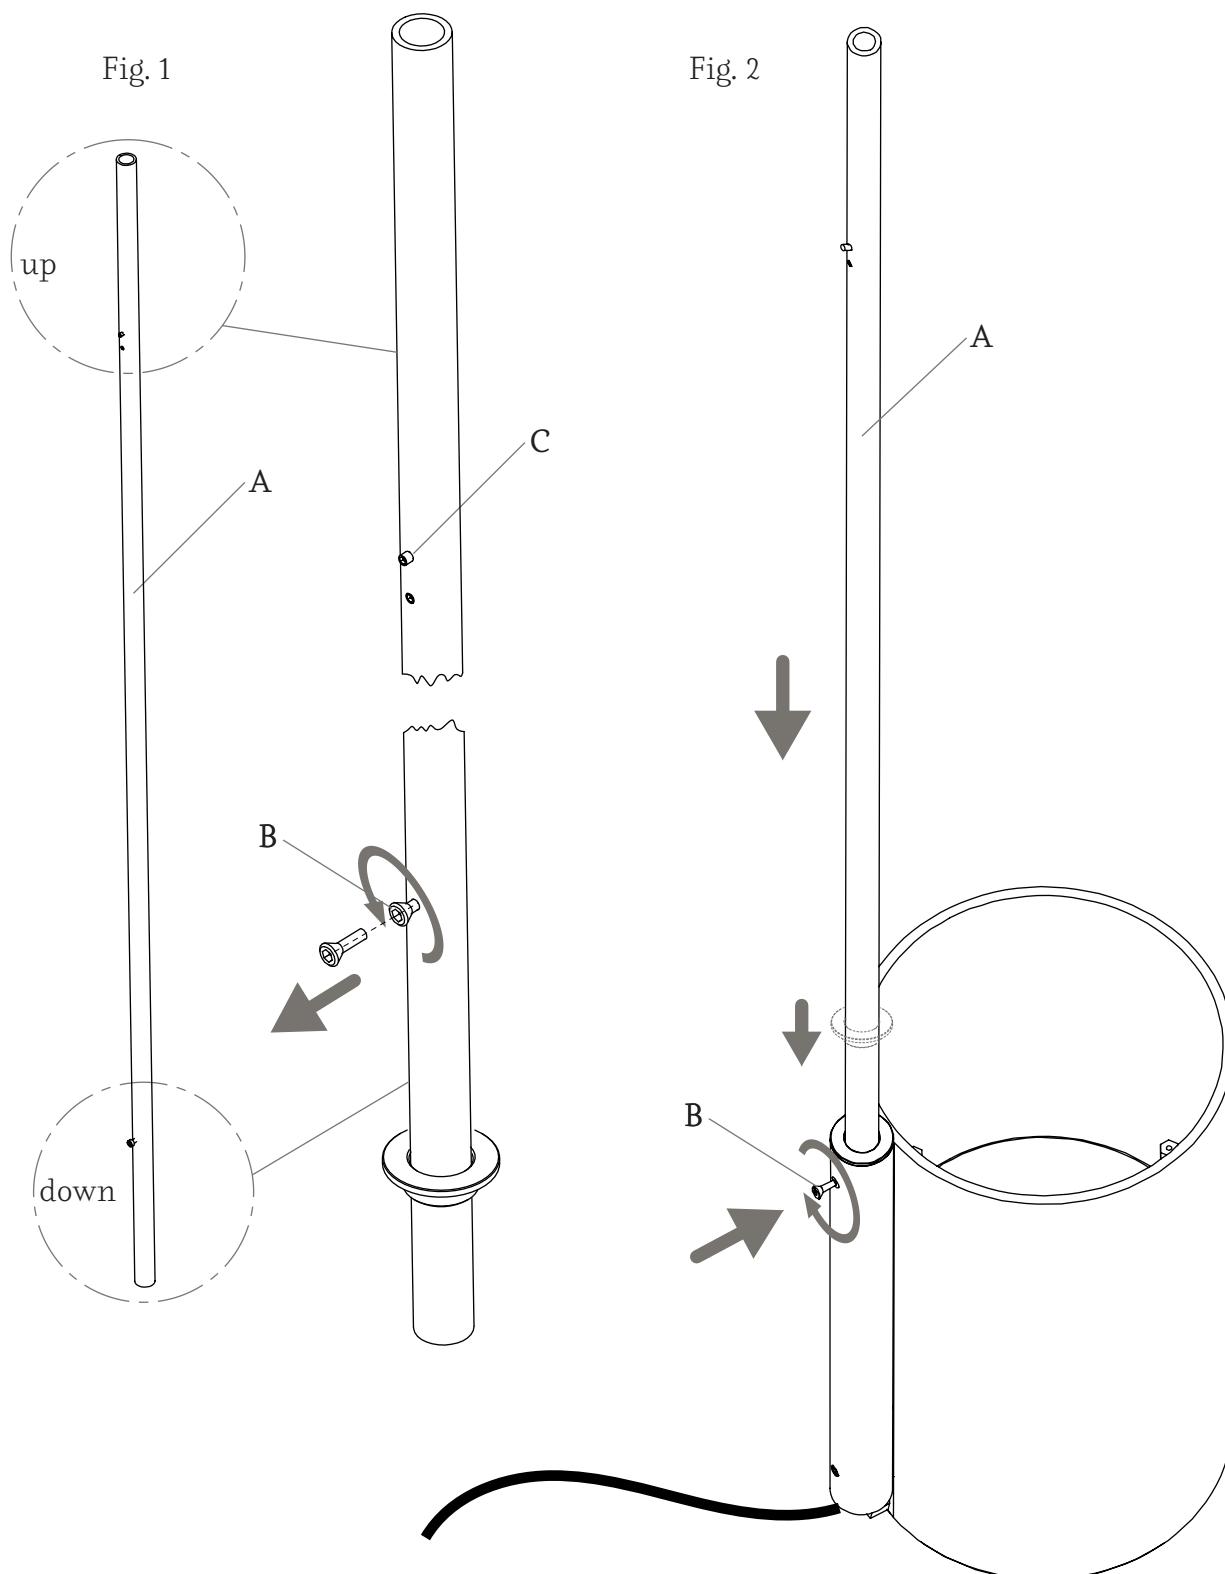

3.
Fig1_ Remove the screw (B) from the stand tube (A).
Fig2_ Insert the stand tube (A) into the base
until it goes no further and fix it with the screw (B).

4.

Fig. 1


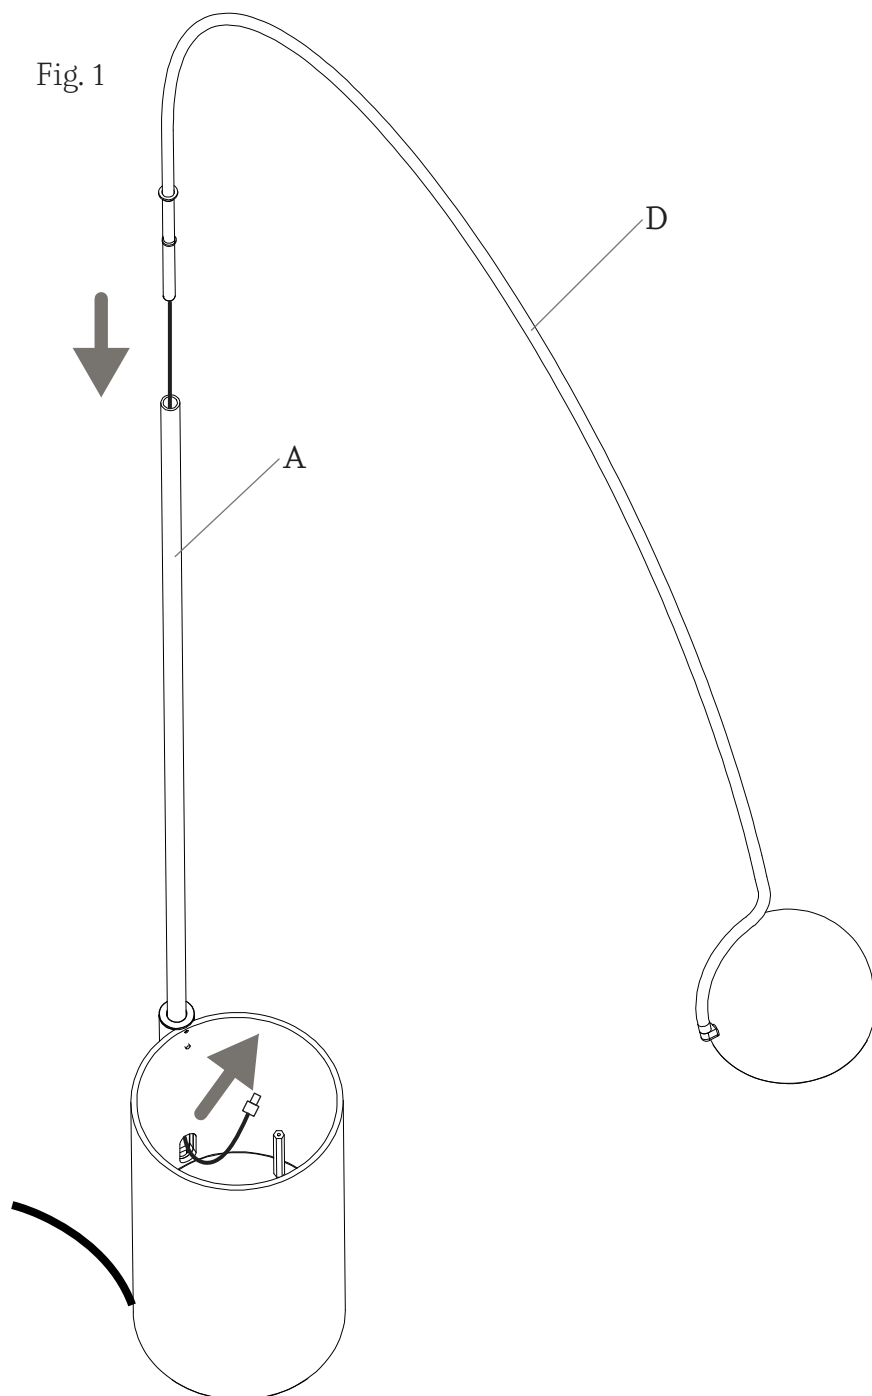



Fig. 2

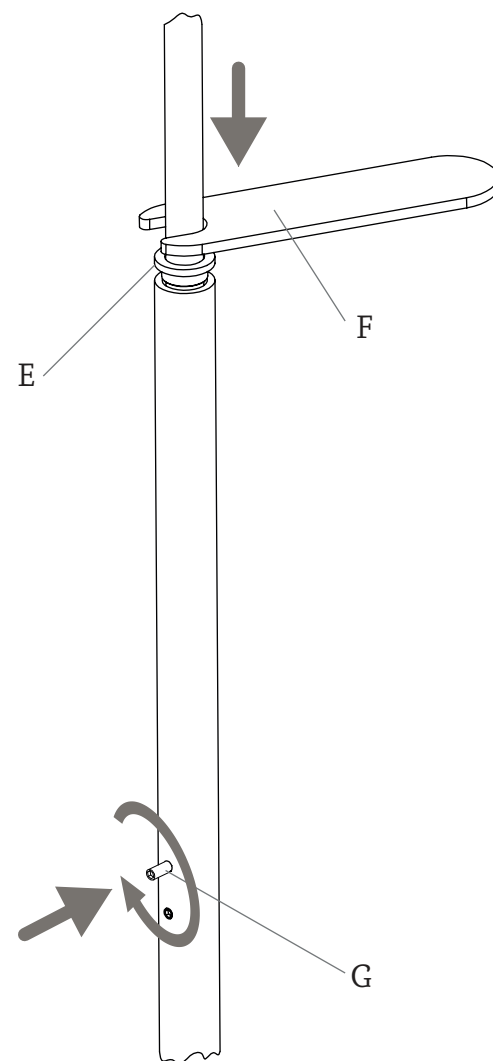

4.


Fig.1_ Insert the bow cable (D), pull it through the base with the help of another person. Place the bow inside the tube until it goes no further.
Fig.2_ Insert the adjustment bushing (E) into the stand tube (A) carefully with the spanner (F). Then fix the bow with the Allen bolt (G).

5.

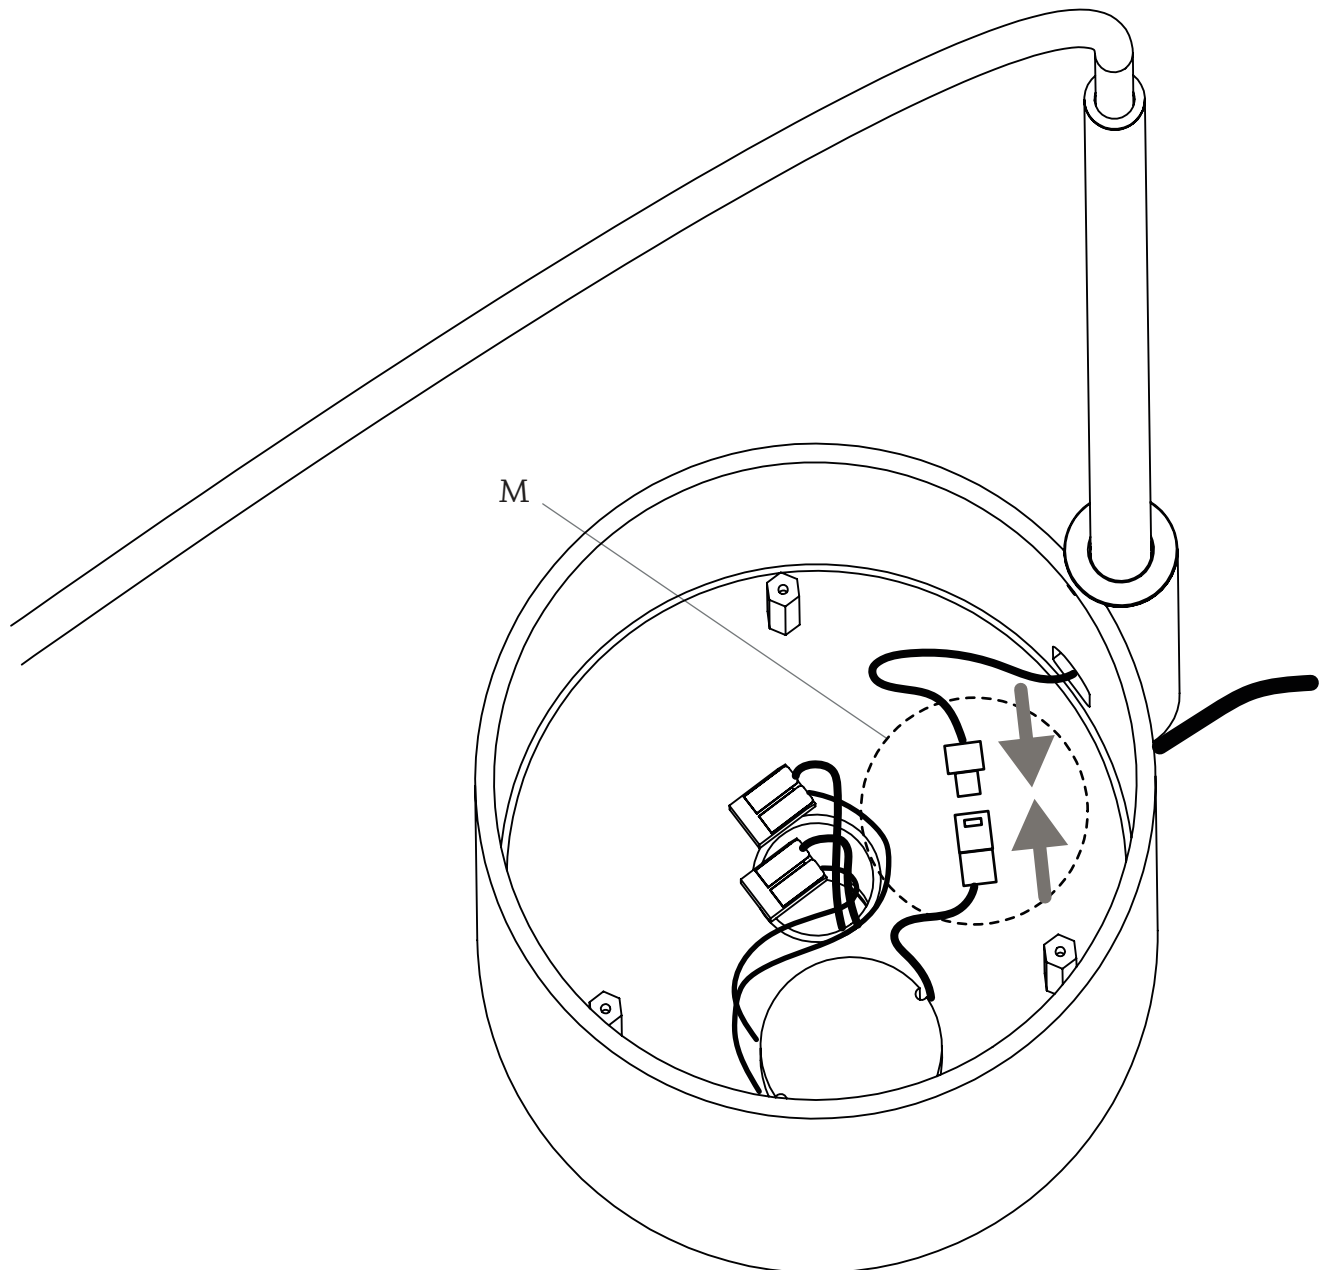


5. Connect the wires (M) with the fast connectors.

6.

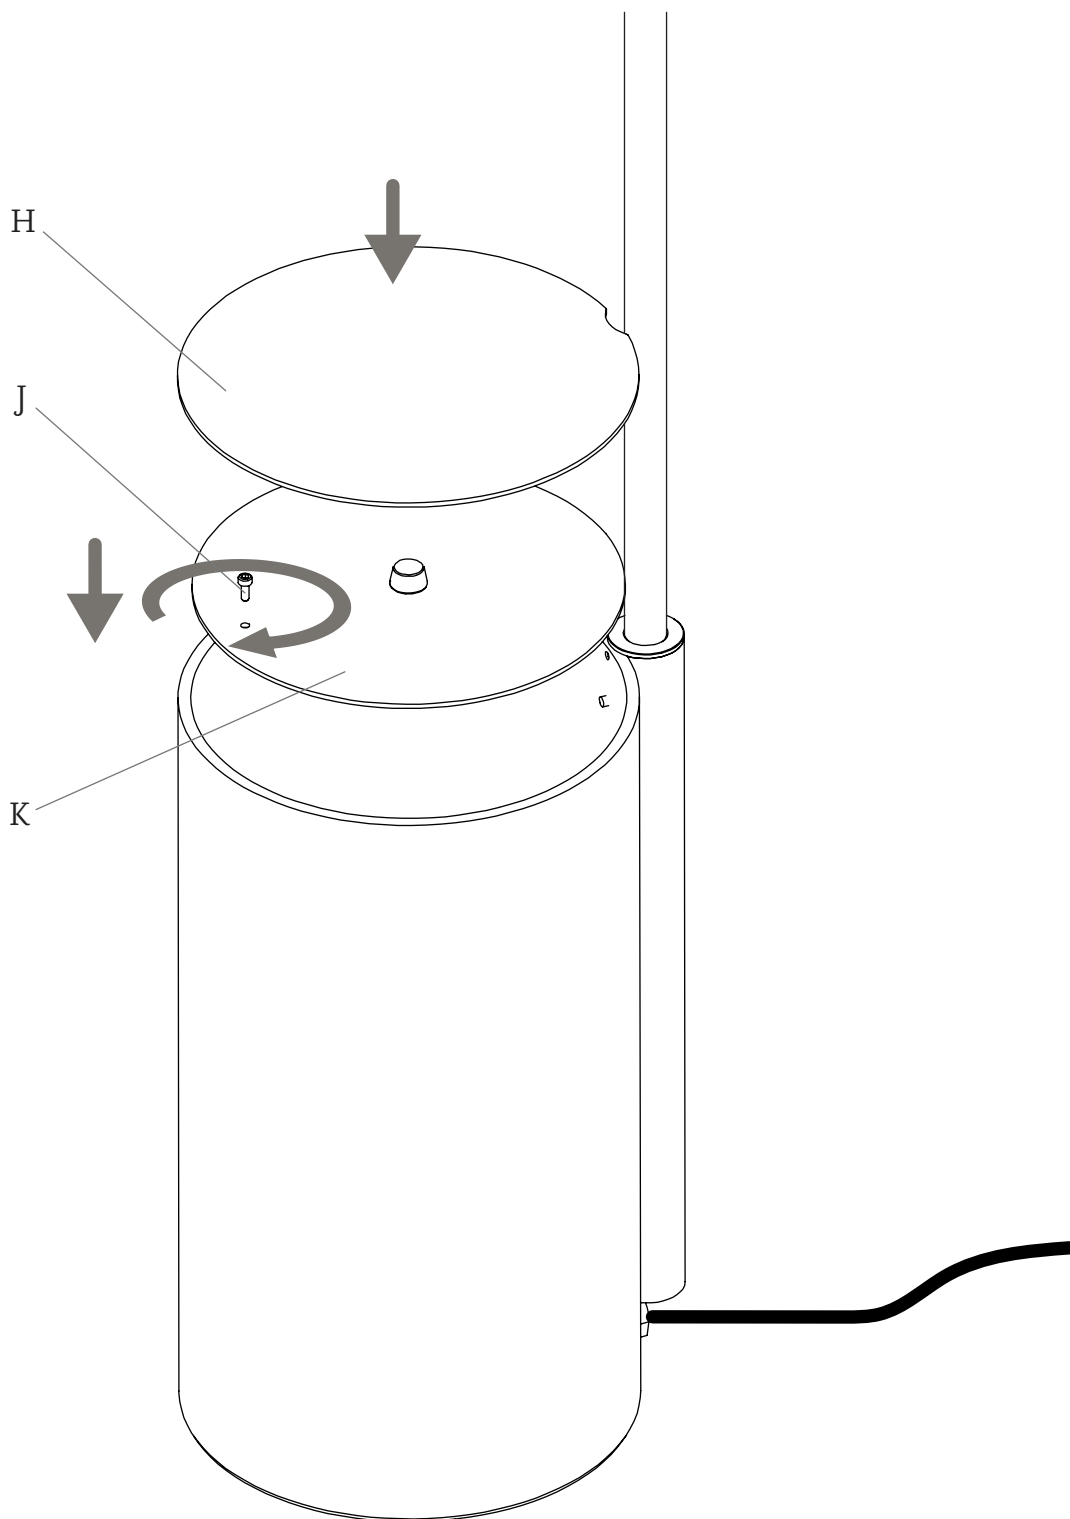

6. Place the inner cover (K) back on with the screw (J) and fit on the top cover (H).

7.

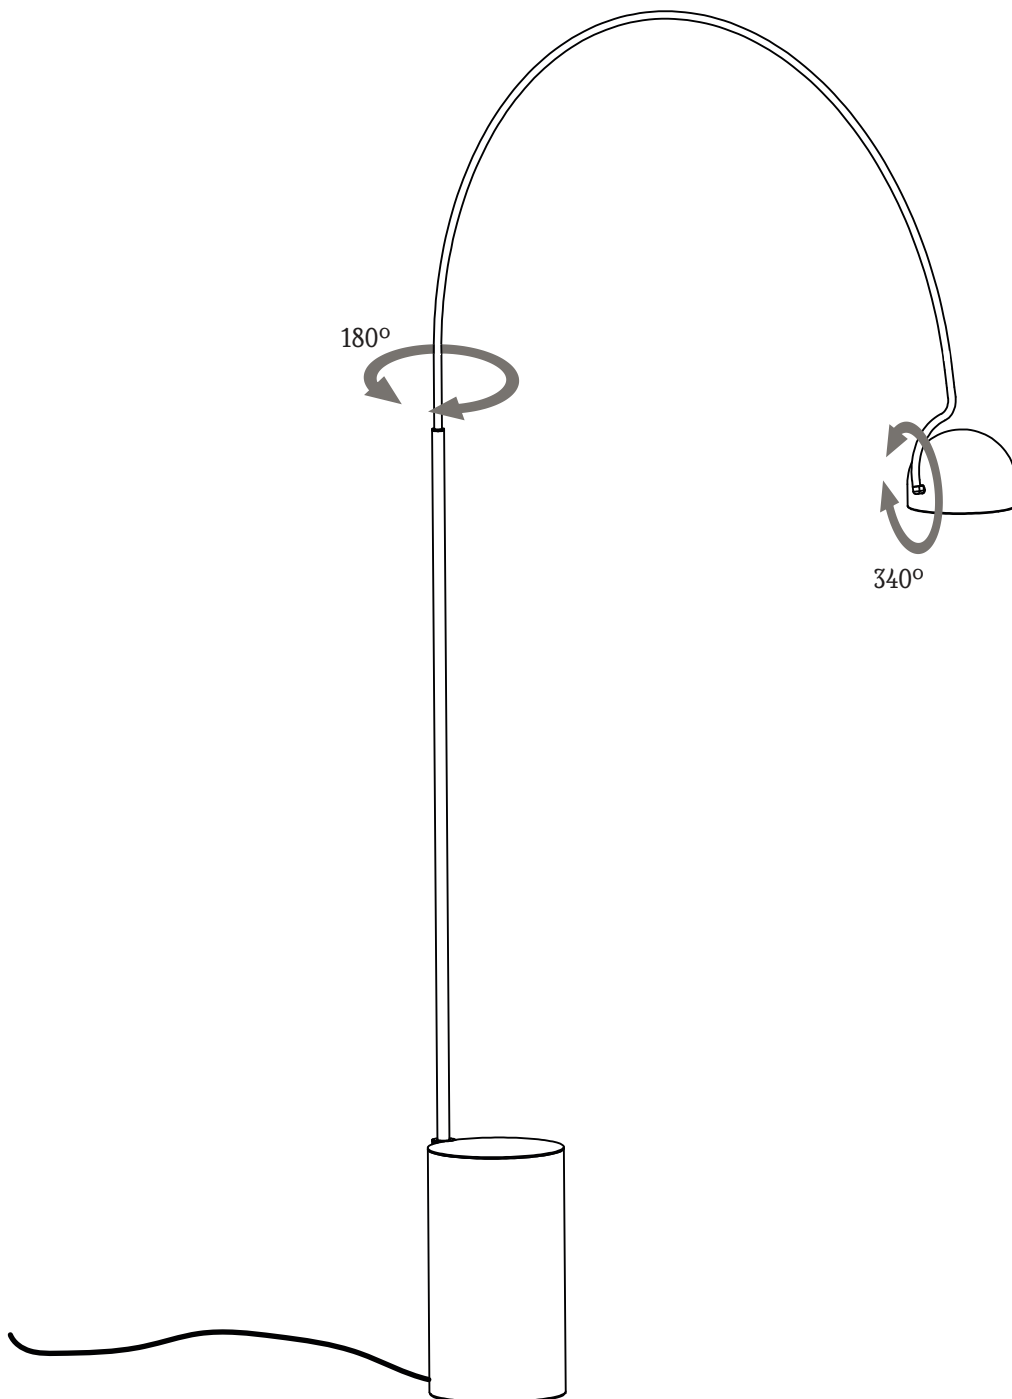

7. Possible lamp positions.

- Lamps without the IP mark are classed as IP20 and are designed for general interior use, except wet areas (bathrooms, etc.)

- Lamps with the IP mark are designed for exterior use and in wet areas. (E.g. IP54)

- They offer guaranteed protection to people and animals against electrical discharge:

Class I: through single electrical insulation and an earthing conductor once correctly connected.



Class II: through double electrical insulation.



Class III: these kinds of lamps should be connected at very low voltage levels (generally 12V); therefore there is no risk.



- Lamps with this symbol, or without any symbols, can be mounted directly onto normally inflammable surfaces.



- Lamps with this symbol cannot be mounted directly onto normally inflammable surfaces.

- The safety of this lamp is guaranteed by using a maximum wattage bulb that does not exceed the figure displayed visibly on the lamp.



- The product cannot be treated like conventional domestic waste; it must be taken to the corresponding recycling point for electrical and electronic equipment.