

LINE VOLTAGE BISTRO STRING LIGHT KIT



DESCRIPTION

The Brilliance Line Voltage Bistro String Light Kit is designed with two-way mounting holes for easy installation. The connection points are weather sealed, making all 48 feet of string outdoor ready.

FEATURES

- Patented design (U.S. Patent D898986S)
- String features a waterproof seal
- Two-way mounting holes at each lamp position eliminate the need for zip ties and create a more secure installation for the life of the string lights
- ETL Listed 5020354



Part Number:

LINE-VOLTAGE-BISTRO-STRING-KIT

LINE VOLTAGE BISTRO STRING LIGHT KIT


Operating Range	120VAC
Total Length	48 ft
String Lead Length	15 in. on both ends
Lamp Postions	24
Includes	24 S14 Filament, 2.5W, 2700K Lamps, Bistro String, 2 Replacement Fuses
Warranty (years)	2

NEC® Article 411.5 (B): Lighting systems shall be installed not less than 3m (10ft) horizontally from the nearest edge of the water, unless permitted by Article 680.



Waterproof seal

Two-way mounting holes

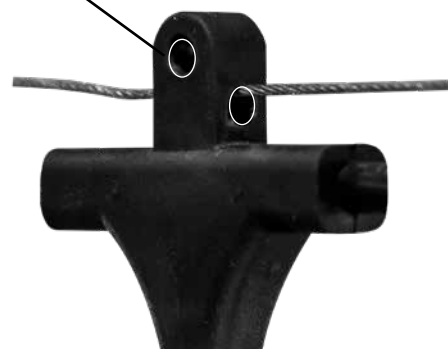



LINE-VOLTAGE-BISTRO-STRING-KIT

TIPS FOR INSTALLING THE LINE VOLTAGE BISTRO STRING LIGHT KIT

1. Choose the best installation option for the environment. Hang from structures or install posts to hang the string lights.
2. Measure for length and map out the configuration. Include any zigzags or crossovers in your design.
3. Install the mounting hardware to the structure.
4. While the string is on the ground, install the included S14 lamps.
5. Thread the mounting cable through the mounting holes, then pull the string with lamps taut and hang it from the mounting hardware. The two-way mounting options alleviate the need for using zip ties to secure the cable and string together.
6. After all the lamps are installed, turn on the power.

NOTE: If the string stops energizing over time, first check the power source. If you confirm power is still available, check the fuse in the cord end. Two replacable fuses are included in the kit.