



CONTENTS

Delta 18" Sconce

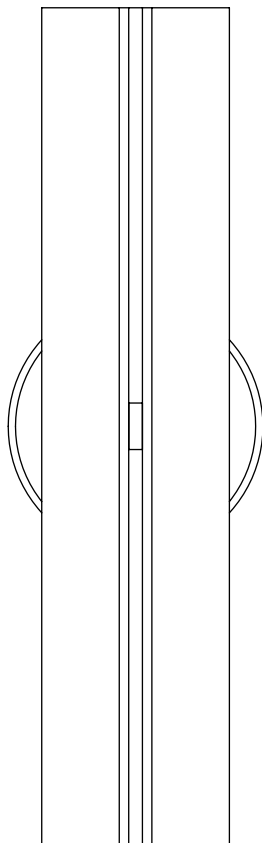

Crossbar




(x5) Wago Connector



(x2) Set Screws



(x2) #8-32 Screws




Green Ground Screw



Terminal Ring and Ground wire



Hex Key



LED driver




SAFETY INFORMATION

Only one light bulb per socket.  
Only suitable for direct mounting on non-combustible surfaces.  
Under no circumstances can Delta 18" Sconce be mounted on normally flammable surfaces.  
Suitable for dry, indoor use only.  
Maximum ambient temperatures: 25° C


## DELTA 18" SCONCE | INSTALLATION

*Note: Please contact a licensed electrician.*

1. Install the driver (A) into the junction box (B) and make the lead wire connections using the provided two port wagos (C)

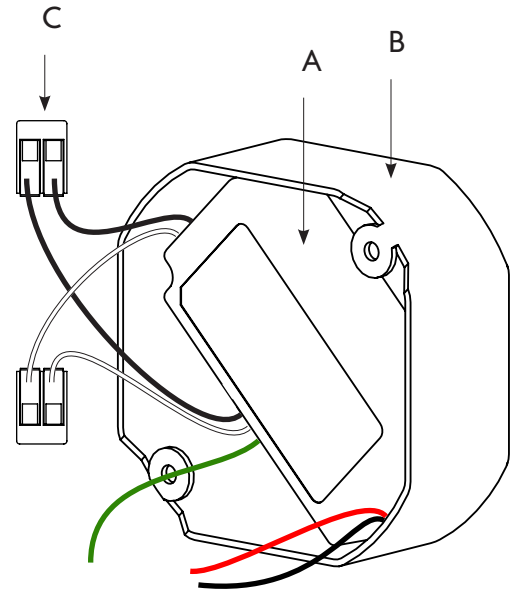


2. Ground the crossbar (D) using the provided two port wago (E).
3. Tuck in the connected wires, and mount the crossbar to the junction box using the provided 8-32 screws (F).
4. Be sure to pull the output driver wires through the crossbar center opening.

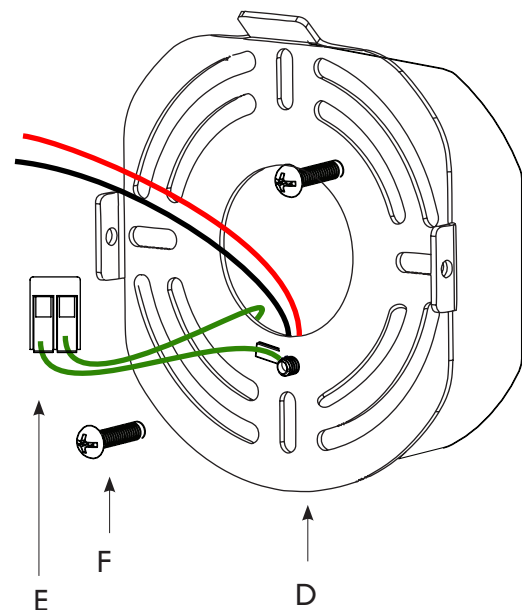

## DELTA 18" SCONCE | INSTALLATION

---

5. Make the wire connection between the fixture and the LED driver using the provided 2 port wagos (G). Then tuck the wires into the J-box.

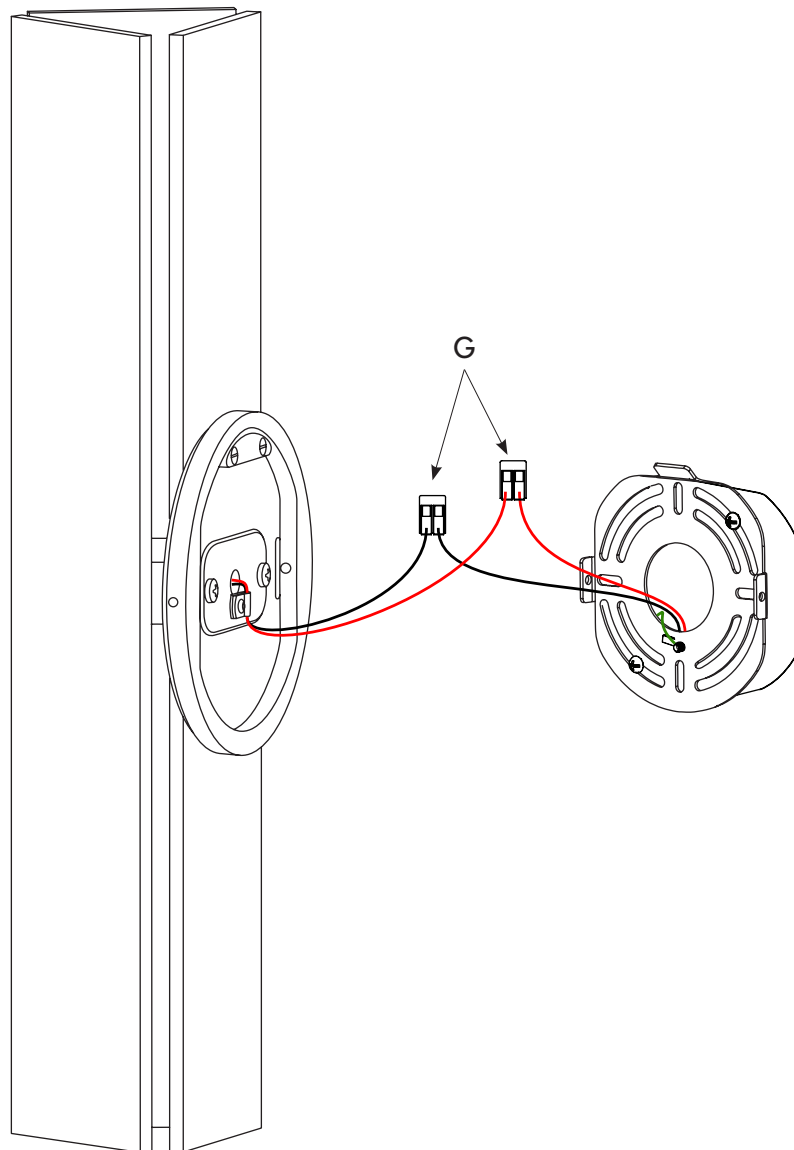

## DELTA 18" SCONCE | INSTALLATION

6. Hook the fixture backplate (H) onto the french cleat of the crossbar (I).
7. Once the fixture assembly is resting in place, use the provided Hex Key (J) to tight the two side set screws to the crossbar until the backplate is secured.

