

# BERT FRANK

## KERNEL PENDANT LIGHT

### MAINTENANCE

- Lacquered brass and glass should be wiped with a soft duster.
- Coloured parts can be wiped with a dry cloth.


### TECHNICAL

- 4 x G9 LED bulbs


www.bertfrank.co.uk  
+44 (0)207 164 6482

### INSTALLATION


- 1** - Thread 4 x flexes from the main shade up through the drop rods (and out the top of the drop rods if this has not been done already).

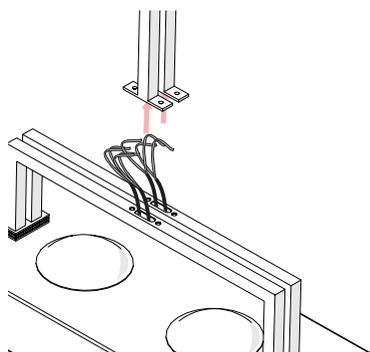


- 2** - Screw the drop rods down onto the main shade.

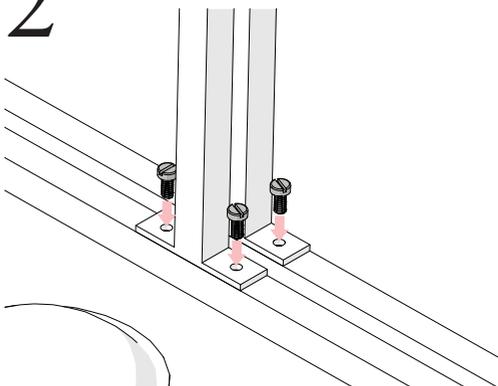

- 3** - Screw the mounting plate to the ceiling.

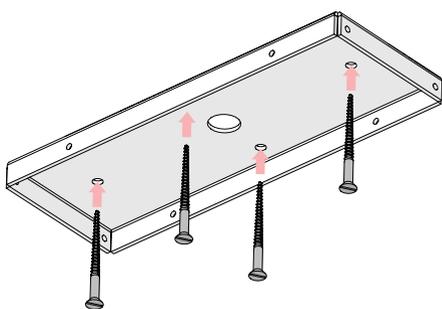


- 4** - Make electrical connection.  
- Connector block not supplied but ensure a suitable type is used.

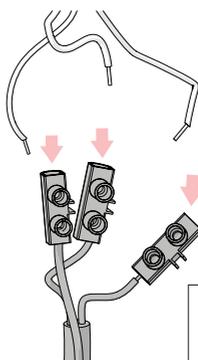


!!! Ensure this is done by a qualified electrician. !!!

- 5** - Finally fix the light to the ceiling by screwing the cover plate to the mounting plate.

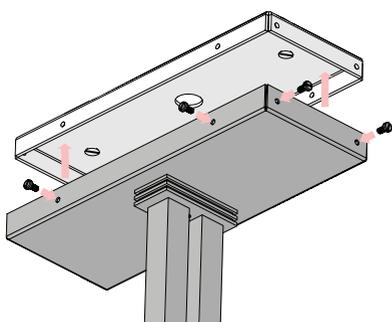


### BULB REPLACEMENT

- 1** - Turn off the light at the mains.  
- Unscrew the 8 x screws on the underside of the shade.  
- Remove the diffuser to expose the glass globes.

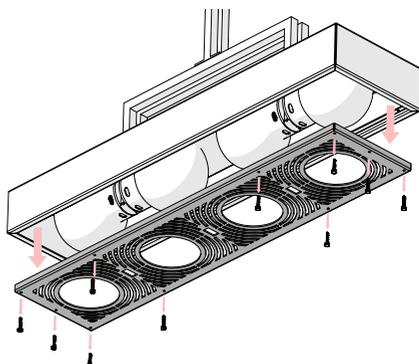


- 2** - Holding the glass globe in one hand pull it away from the stem of the lamp until it is released from the spring clips.  
- **Keep fingers away from the aluminum collar.**

aluminum collar

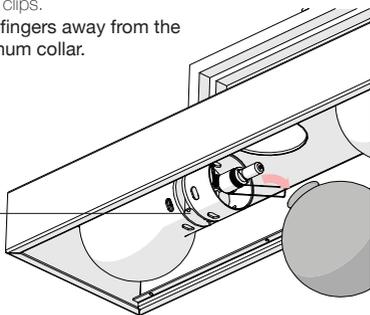


- 3** - Replace G9 bulbs by pushing them into lamp holder.

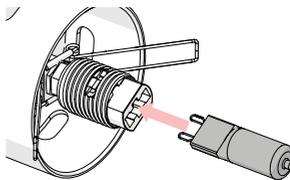


!! If lamp has been in use recently ensure you leave enough time for the old bulbs to cool down before removing them. !!

- 4** - Pinch the two ends of the spring clips together.  
- Slide them back into the neck of the glass globe.  
- The globe should fit back into the collar. Be careful not to catch your fingers.

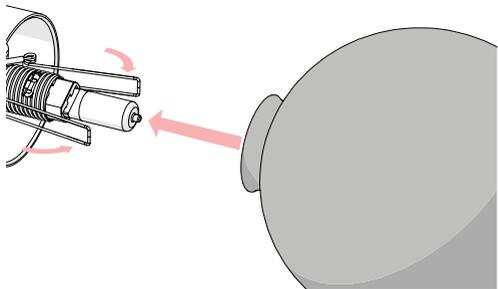

- 5** - Repeat the process with the other glass globes.  
- Replace the diffuser and all the screws on the underside.

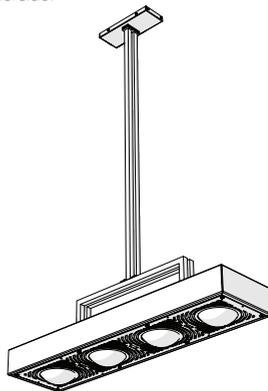

This product is only suitable for connection to the native power supply to which the unit was specifically manufactured. It is for indoor use only, and not suitable for a bathroom location.

If the Class II, double insulated symbol is on the lamp, it does not require an Earth, and Live or Neutral must not be connected to Earth. If there is no such symbol, then the lamp must be Earthed.

Never fit bulbs of a higher wattage than those specified on the label, as these may cause overheating and damage the fitting.

If the mains cable becomes damaged it must only be replaced by a technically competent, qualified person.

Allow 10 minutes to cool before replacing, adjusting or cleaning. Clean with a dry cloth only. Do not use liquid or abrasive cleaners on this product.

If you are in any doubt about your competence please consult a qualified electrician.

If any modification is made it will invalidate the warranty and may render the product unsafe.