

BERT FRANK

REVOLVE RISE & FALL PENDANT

MAINTENANCE

- Lacquered brass and diffuser should be wiped with a soft duster.
- Coloured parts can be wiped with a damp cloth.


TECHNICAL

- 3 x G9 LED bulbs


www.bertfrank.co.uk
+44 (0)207 164 6482

INSTALLATION


- 1**
- Mount pulley wheel at desired drop point location (recommended 30cm-40cm from wiring exit in ceiling).
 - Mount using suitable fixings to substrate
 - Ensure the lamp fixings are secured into a surface/material with sufficient load bearing potential.




- 2**
- Feed electrical cable from ceiling through the wiring exit hole in mounting plate.
 - Screw plate to ceiling using suitable fixings

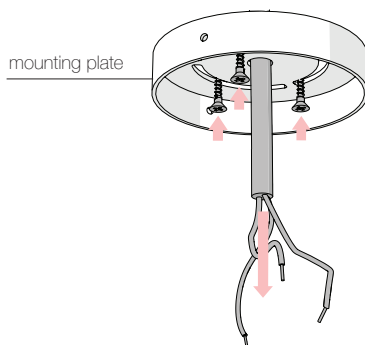

- 3**
- Thread the flex from the shade up and over the pulley, down through the weight and hold up near the mounting plate.
 - Decide on the overall flex length which will determine the maximum and minimum drop heights. Cut the flex to length.

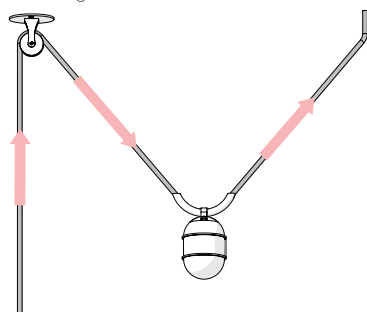


- 4**
- Feed the flex through the cord grip in the ceiling cover.

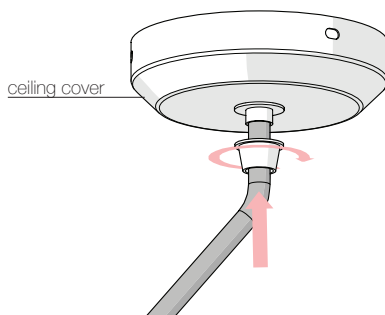


INSTALLATION CONTINUED

- 5
- Coming out of the top of the flex there will be electrical wires and a steel suspension cable.
 - Secure steel suspension cable by looping up and back down over the clamping bolt.
 - Tighten the screw to ensure it is secure.

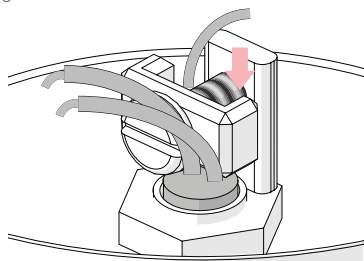


- 6
- Make electrical connection.
 - Connector block not supplied but ensure a suitable type is used.




!! Ensure this is done by a qualified electrician. !!

- 7
- Tighten the cord grip to lock in place.

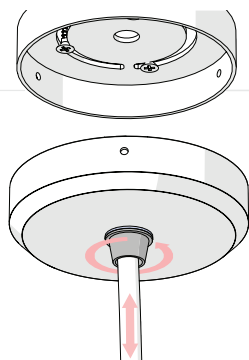


- 8
- Screw the ceiling cover to mounting plate with 3 x screws on side of cover.

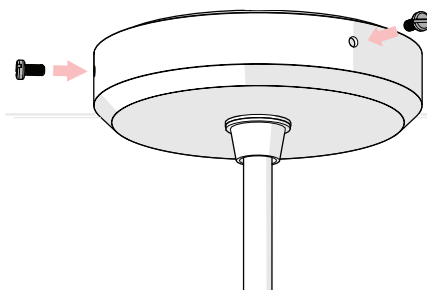


BULB REPLACEMENT

- 1
- Turn off the light at the mains.
 - Unscrew the bottom finial.


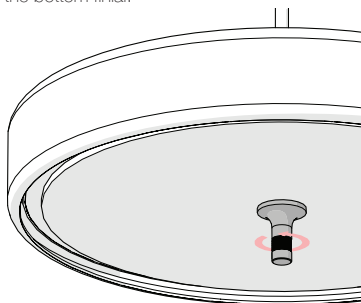


- 2
- Remove the bottom finial and diffuser.

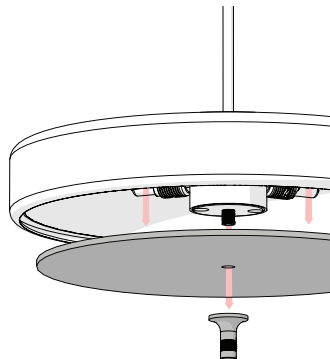

BULB REPLACEMENT CONTINUED

- 3
- Replace bulbs by pushing them into lamp holder.
 - Once bulbs are installed replace diffuser and bottom finial.

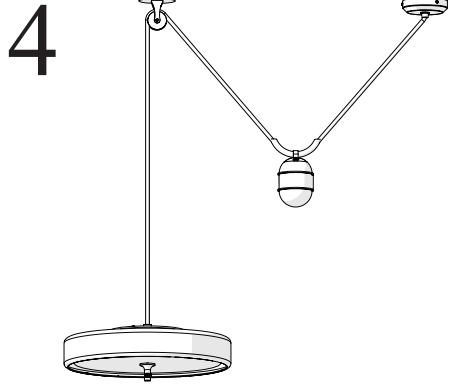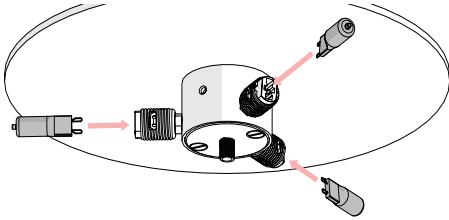

This product is only suitable for connection to the native power supply to which the unit was specifically manufactured. It is for indoor use only, and not suitable for a bathroom location.

If the Class II, double insulated symbol is on the lamp, it does not require an Earth, and Live or Neutral must not be connected to Earth. If there is no such symbol, then the lamp must be Earthed.

Never fit bulbs of a higher wattage than those specified on the label, as these may cause overheating and damage the fitting.

If the mains cable becomes damaged it must only be replaced by a technically competent, qualified person.

Allow 10 minutes to cool before replacing, adjusting or cleaning. Clean with a dry cloth only. Do not use liquid or abrasive cleaners.

If you are in any doubt about your competence please consult a qualified electrician.

If any modification is made it will invalidate the warranty and may render the product unsafe.
