

BERT FRANK

SHEAR WALL LIGHT

MAINTENANCE

- Please wear gloves for installation to avoid grease finger marks.
- Unlacquered brass parts - stem and arm - can be cleaned with an abrasive pad (Scotch-brite provided).
- Lacquered brass shade should be wiped with a soft duster.
- Coloured parts can be wiped with a dry cloth.


TECHNICAL

- 1 x G9 LED bulb

www.bertfrank.co.uk
+44 (0)207 164 6482

INSTALLATION


- 1**
- Feed electrical cable from the wall through the wiring exit hole in mounting plate. Screw plate to wall.
 - This lamp is **Class 2** and uses **2 Core Double Insulated flex**. It does not matter which wire is connected to the positive main feed.
 - The tap screw holes must be horizontally level.




!! Use appropriate screws and plugs for the material you are fixing it to. !!

- 3**
- Make electrical connection.
 - Connector block not supplied but ensure a suitable type is used.
 - Ensure to connect earth wire to earth in mains feed.


!!
Ensure this is done by a qualified electrician.
!!

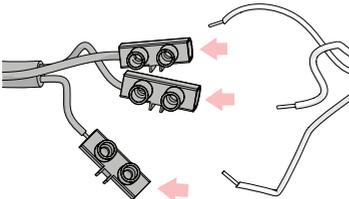

- 2**
- Adjust the length of the flex by unscrewing the cable grip on the back of the wall cover.
 - Ensure that there is enough flex to allow for full movement of the light arms.

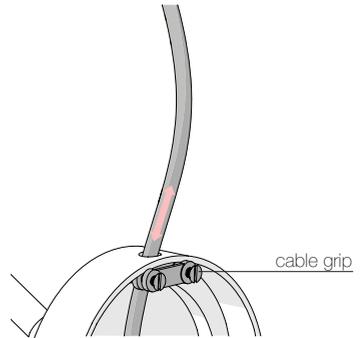


- 4**
- Screw the wall cover to mounting plate with the 2 x screws provided.

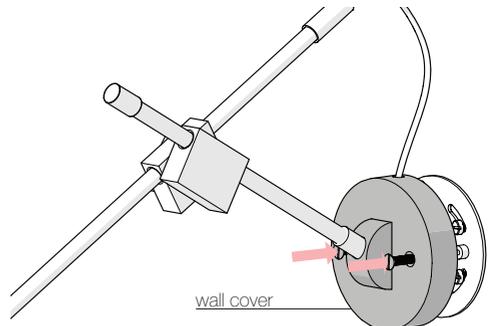


INSTALLATION CONTINUED...

- 5** - Turn the tightening block to loosen the connector blocks and arms.
- Ensure that the arms of the light are supported as this is carried out. Be sure not to over loosen.

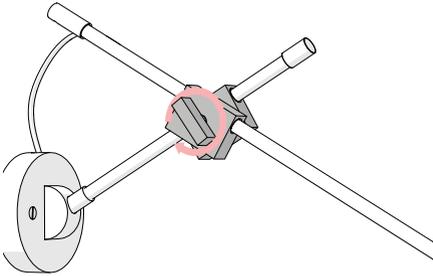


- 6** - Adjust the angle of the arms of the shade as desired and then retighten the block.

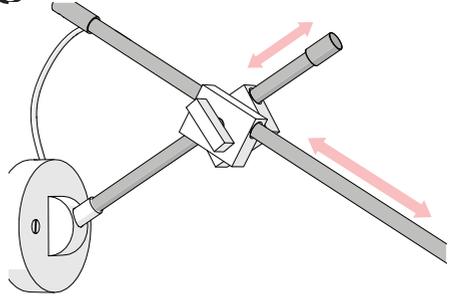


BULB REPLACEMENT

- 7** - Adjust the actual shade as desired to optimise the light angle.

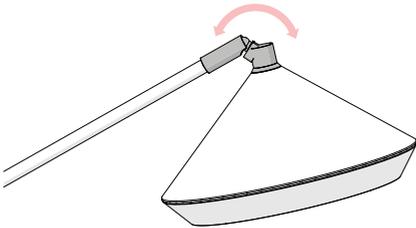

- 1** - Replace G9 bulbs by pushing them into lamp holder.

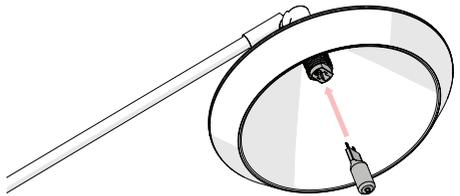

!! If lamp has been in use recently ensure you leave enough time for the old bulbs to cool down before removing them. !!

This product is only suitable for connection to the native power supply to which the unit was specifically manufactured. It is for indoor use only, and not suitable for a bathroom location.

If the Class II, double insulated symbol is on the lamp, it does not require an Earth, and Live or Neutral must not be connected to Earth. If there is no such symbol, then the lamp must be Earthed.

Never fit bulbs of a higher wattage than those specified on the label, as these may cause overheating and damage the fitting.

If the mains cable becomes damaged it must only be replaced by a technically competent, qualified person.

Allow 10 minutes to cool before replacing, adjusting or cleaning. Clean with a dry cloth only. Do not use liquid or abrasive cleaners.

If you are in any doubt about your competence please consult a qualified electrician.

If any modification is made it will invalidate the warranty and may render the product unsafe.