



Fluorescent: 120-277v
One, 42W MAX,CFH, 4-pin Lamp
Incandescent: 120-277v
One, 200W Max, Type A Lamp

IMPORTANT | CAUTION

Read all instructions thoroughly, and turn off power at circuit breaker or fuse box before proceeding.

Step 1 Remove the fixture and all fixture components from packaging. Avoid using a sharp blade on packaging because doing so may result in damage to the finish and/or acrylic shade.

Step 2 Using a 5/64" allen wrench, remove the set screws from both ends of each stem. (See Figure 1)

Step 3 Install the stems onto the globe assembly, using the set screws to hold them in place. (See Figure 2)

Step 4 Install the canopy to the top end of the stems, using the set screws to hold them in place. (See Figure 3)

Step 5 After removing the access hole cover from the center of the canopy, install the universal crossbar onto the outlet box with the round head screws provided in the mounting kit. Raise the fixture into place, and secure to the universal crossbar with the knurled thumbknobs. Pull the supply wires through the access hole. (See Figure 4)

Step 6 Make wire connections using the twist-on connectors provided in the mounting kit. Connect the white fixture wire to the neutral supply wire; typically white. Connect the black fixture wire to the hot supply wire; typically black. Connect the fixture ground wire to the ground supply wire; typically copper.

Step 7 After making wire connections, carefully push wiring into the outlet box, then replace the access hole cover using the flat head screws. (See Figure 5)

Step 8 Install appropriate lamping, then restore power at the breaker / fuse box.


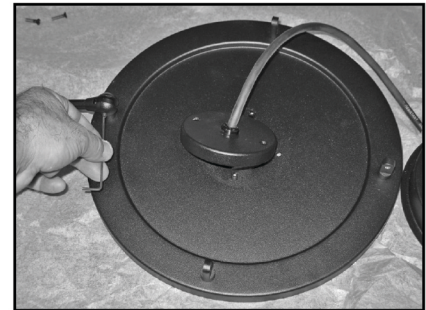


Figure 3

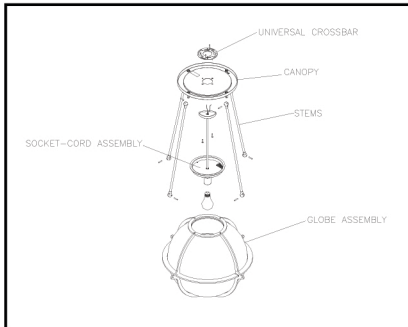

Exploded view



Figure 1



Figure 4



Figure 2



Figure 5

Thank you for your purchase and enjoy your Boyd lighting fixture.