

Figure 1

Instructions for Installation:

E10362 Phantom Sconce

Lamping Specifications:

LED (2800K Colour Temperature)

• 120v - 277v

Rated @ 50,000 hours

**IMPORTANT! AT ALL TIMES WIRING
TO BE DONE PER NATIONAL ELECTRIC
CODES (NEC) OR APPLICABLE LOCAL
CODES**

**IMPORTANT | CAUTION
READ ALL INSTRUCTIONS THOROUGHLY.
TURN OFF POWER AT CIRCUIT BREAKER OR
FUSE BOX BEFORE PROCEEDING.**

Step 1 Remove the fixture from packaging. Avoid using a sharp blade on the packaging, doing so may result in damage to the finish of lighting fixture. Locate the glass panels and set aside in a location where they will not become damaged.

Step 2 Locate the outlet box and with power off at circuit, route the power supply wires through the center of the universal mounting bracket and temporarily mount fixture mounting bracket to the outlet box. With bracket mounted, mark the holes to be used for additional mounting support (if applicable). Install additional hardware or appropriate wall anchors and securely mount bracket to wall. (Fig 1)



Figure 3

Step 3 Make wire connections between the lighting fixture and the supply wires at the junction box. If the fixture is non-dimming, connect the black, white, and green wires. If the fixture is dimmable, ensure that gray and purple wires are installed between the dimmer and fixture, and connect the wires to the fixture.

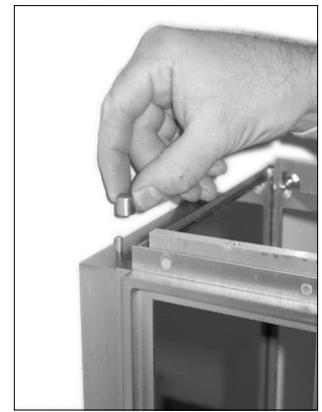


Figure 4

Step 4 Carefully push the wire connections inside the outlet box. Raise the fixture assembly and tilt the upper portion of the fixture towards the wall and align the holes in the top of the fixture with the threaded studs in the mounting bracket. Lower the fixture housing into position over mounting bracket. (Fig 2 and 3)



Figure 5

Step 5 Secure the fixture to the mounting bracket using the decorative knobs at the top of the fixture and screws at the bottom. (Fig 4 and 5)

Step 6 For exterior application apply weather proof caulking or silicon type adhesive to the external edge of the backplate and wall to prevent moisture from entering between fixture and the wall. Leave a small gap (approx 1/2") at bottom of the backplate so that moisture can escape.

Step 7 Locate the glass panels and use care when handling and installing so as to not leave finger prints or



Figure 2

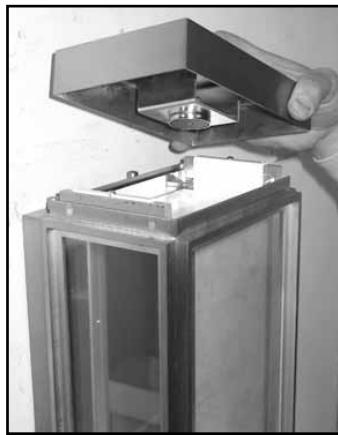


Figure 6

smudges on the glass, the installation of the glass panels requires that the top housing cover be removed.

Step 8 Removing the top housing cover. The top housing cover is held in place by a magnet. To remove firmly grasp the housing and lift up until the magnet releases and cover can be removed. (Fig 6)

Step 9 Remove the screws from the internal glass retainer bracket and lift the bracket from the framed housing. (Fig 7)

Step 10 Locate the large glass panel and install first. Orient the panel to the front of the housing frame and carefully lower into position. (Fig 8)

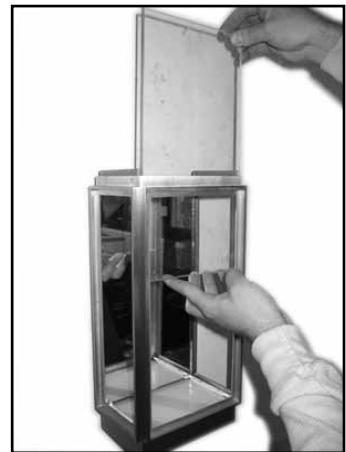


Figure 8

Step 11 Locate the remaining glass panels and carefully lower into position. Please note that the panels will have a tendency to fall inward. We recommend the use of a small piece of tape to temporarily prevent the panel from falling. (Fig 9)




Figure 7

Step 12 Install the glass retainer bracket and secure into position with screws. (Fig 7)

Step 13 Install the top housing cover by carefully aligning and lowering the cover into position. (Fig 6)

Step 14 Restore power at the breaker/fuse box and illuminate the lighting fixture.



Figure 9

