




TR-600-24



Single-Feed Remote Recessed In Wall Transformer 600W 24V Magnetic

Remote recessed single feed 600 watt magnetic transformer converts line voltage to 24 volt output. Fast acting circuit breaker on the 24 volt side will shut the system off in case of overload or short and can easily be reset. Can be recessed in the wall or surface mounted. Consult Low Voltage Wire Size Chart for proper gauge wire to be used between remote transformer and power feed. Power feed or power feed canopy required, sold separately.

Dimming:

With 1000 watt low voltage magnetic dimmer

Mounting Requirements:


Must be in accessible location

Weight:

25 lb (11.34 kg)

Ordering Code




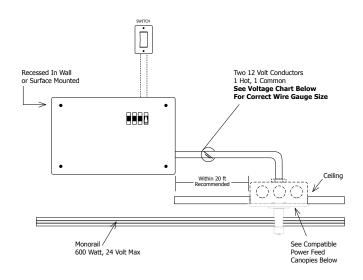

LOW VOLTAGE WIRE SIZE CHART

Use to decide the correct copper wire size for a recommended 3 percent voltage drop. The length shown is the length of wire from the transformer to the power feed canopy/J-Box.

24 Volt	5 ft. (1.5m)	6-15 ft. (1.8-4.6m)	16-20 ft. (4.9-6.1m)	21-40 ft. (6.4-12.2m)
600 Watt	#12 GA	#8 GA	#6 GA	#4 GA

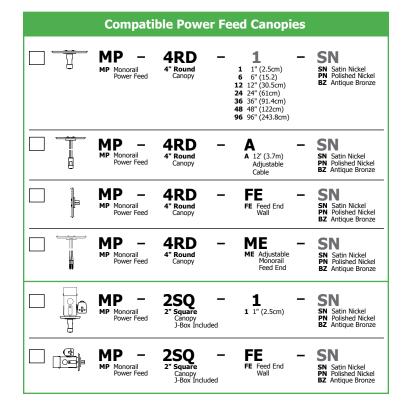



PROJECT:

FIXTURE TYPE:

DATE