

PORT LED UPLIGHT OR STEP LIGHT COMPONENTS - INDOOR/OUTDOOR

REV.08.10.16



PORT-HD-SQ-ST-SA




PORT-HD-RD-ST-SA




PORT-JC



SC-WO

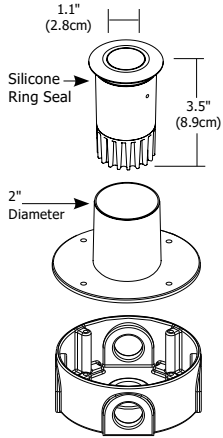

Wet location Round Junction Box Supplied by Electrician



Indoor Octagon Junction Box Supplied by Electrician

Description:

Slim and recessed, with an integral 12VAC 3.5 watt, high powered, warm white LED, the fixture features a 16 degree precise focus, tempered glass lens with a marine-grade aluminum, round or square, beveled edge trim. The Port LED is outdoor-rated using a wet location electrical box or indoor using a standard octagon electrical box. The trim accepts dichroic color filters, which are used with PORT-LL(H). Compatible remote power supplies are TE-60L-12, T-150-12 or T-300-12. Order junction box cover, wood spring clips and remote transformer separately. Fixture includes 5 year warranty.

Finish:

Satin Aluminum

Lamp Specification:

3.51W, 12VAC **LED** 3029K, 80CRI, 95 lumens
70% lumen maintenance based on 50,000 hours of operation.
Add a warming filter to bring the color to 2500K

Power Supply:

Electronic TE-60L-12, Magnetic T-150-12, T-300-12

Dimming Information:

Can dim down to 30% without flickering using low voltage electronic or magnetic dimmer.

Weight:


1 lb (.45 kg)

D	FC	DIA
24"	328	5"
48"	91	10"
72"	40	14"
96"	22	17"
120"	14	26"
144"	10	28"



PORT FC Reading

Product	Type	Description	Trim	Finish
PORT	HD	RD	ST	SA
PORT Port	HD Head Only	RD Round SQ Square	ST Surface Trim	SA Satin Aluminum

Product	Type	Product	Type
PORT	JC	SC	WO
PORT Port	JC Junction Cover LL 1" Louver with 20° Beam Tilt Lens, Neutral Density Filter, Linear Spread Lens LLH Louver Lens Holder only	SC Spring Clip	WO Wood

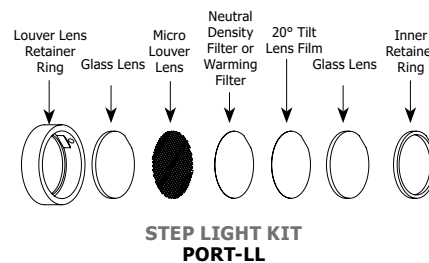

STEP LIGHT KIT
PORT-LL



D	FC	DIA
3"	36	3"
12"	167	4"
21"	35	8"
30"	14	10"
39"	7	12"
48"	4	13"

PORT with LF1-20D and Micro Louver

D	FC	DIA
3"	44	7.5"
6"	85	10"
9"	84	10.5"
12"	34	12.5"

PORT with LF1-20D, LF1-LS and Micro Louver

PROJECT:

FIXTURE
TYPE:

DATE:




REV.08.10.16



Junction Cover

Use indoor with standard octagon electrical box or use outdoor with wet location electrical box.


Product	Description
PORT	JC
PORT Port	JC Junction Cover



Spring Clip

Use the Spring Clip to recess Port into outdoor wood steps, decks, etc. without junction box.

Product	Type
SC	WO
SC Spring Clip	WO Wood





PROJECT: _____ FIXTURE TYPE: _____ DATE: _____

REV.08.10.16



Port Louver Lens Holder

Louver Lens Holders secure onto front of the lamp holding up two lenses or combination of a hexcell louver and lens. Required for securing louvers, lenses and filters in the Port.





Hexcell Louver



Micro Louver


Hexcell and Micro Louver

The Hexcell Louver eliminates glare from the light beam. The Micro Louver used in step lighting requires both the louver lens holder #PORT-LLH and the 20 degree filter# LF1-20D.

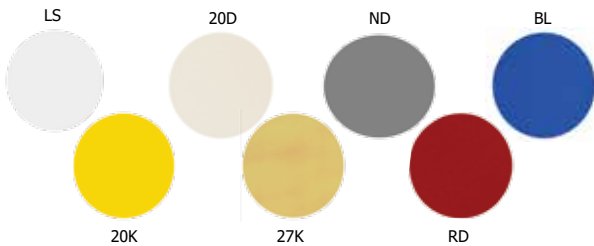

Film Lenses and Filters

Add film lenses and filters to shape beam, change color or adjust color temperatures. Louver lens holder #PORT-LLH required.

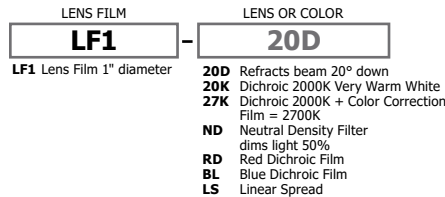

PROJECT: _____ FIXTURE FEATURE _____ DATE: _____




REV.08.10.16



Dichroic Glass Lens

Dichroic lenses operate on a passive-reflective basis, reflecting unused wavelengths while passing wanted portions of spectrum. Dichroics are high in transmission, producing brighter, cleaner, saturated colors. Louver lens holder #PORT-LLH not required.

ACCESSORY LENS		DICHROIC COLOR	
L11		RD	
L11	MR11	RD Red	CW Cool White (3100K-4250K)
		YL Yellow	IN Incandescent (3100-2700K)
		GR Green	
		BL Blue	

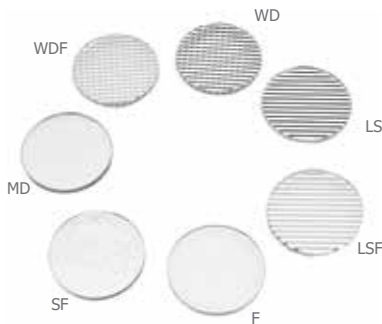

Optical Lens

The soft focus lens reduces lamp glare, spread lenses elongate and diffuser lenses diffuse the light beam. Louver lens holder #PORT-LLH not required.

ACCESSORY LENS		OPTICAL TYPE	
L11		F	
L11	MR11	F Frost	
		SF Soft Focus	
		MD Medium Diffuser	
		WD Wide Diffuser	
		WDF Wide Diffuser Frost	
		LS Linear Spread	
		LSF Linear Spread Frost	
		UV UV Glass	

PROJECT:

FIXTURE TYPE:

DATE:





Low Voltage Feed Wire Size Chart

Use to decide the correct copper wire size for a recommended 3 percent voltage drop. The length shown is the length of wire from the transformer to the power feed canopy/J-Box.

12 VOLT	5 ft.	6-15 ft.	16-20 ft.	21-40 ft.
150 watt	#12 GA	#10 GA	#8 GA	#6 GA
300 watt	#10 GA	#8 GA	#6 GA	#4 GA

Description:

The 150 or 300 watt 12 volt magnetic remote mount transformers convert line voltage into 12 volt power and are protected by fast-acting circuit breakers. All 12 volt remote magnetic transformers are LED compatible with 12 volt AC LEDs.

Power Input:

T-150-12	T-300-12
120 volt AC 1.25 Amp	120 volt AC 2.5 Amp
230 volt AC 0.65 Amp	230 volt AC 1.3 Amp
277 volt AC 0.54 Amp	277 volt AC 1.1 Amp

Power Output:

T-150-12	12 volt AC 150 watt 12.5 Amp
T-300-12	12 volt AC 300 watt 25 Amp

Installation:

Remote magnetic transformers must be installed in an accessible location, such as an attic or in a closet, up to 20 feet from the power feed canopy. Outdoor version available.

Dimming:

Dims with Lutron Skylark or Diva magnetic low voltage dimmer


Compatible magnetic dimmers are connected on the line voltage side of transformers. Some buzzing may occur at low levels and may be reduced with a de-buzzing coil. Visit www.edgelighting.com for up-to-date LED dimming information.

Dimensions:


8.75"(L) x 4.4"(D) x 3.8"(H)
(22.2cm x 11.2cm x 9.7cm)

Weight:

8.41 lb (3.81 kg)

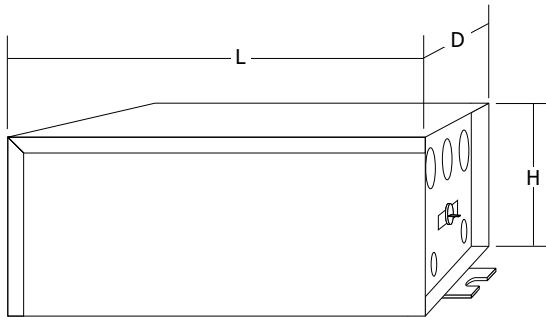

Product	Power	Voltage Output	Voltage Input	Type
T	150	12	Standard 120V (leave blank)	Standard Indoor (leave blank)
T Remote Transformer	150 150 Watt 300 300 Watt	12 12 Volt	2 230V 50Hz 3 277V 60Hz	o Outdoor

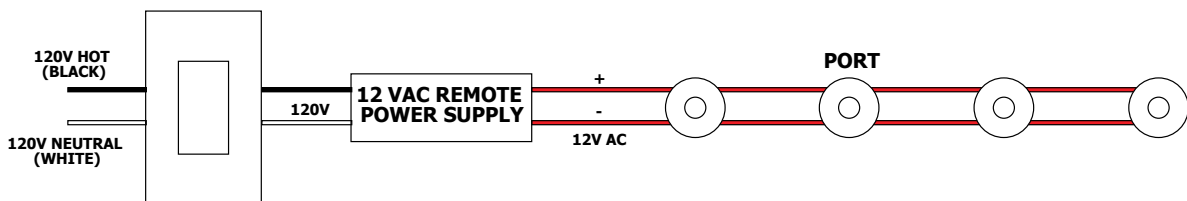


PROJECT:

FIXTURE
TYPE:

DATE:



REV.08.10.16

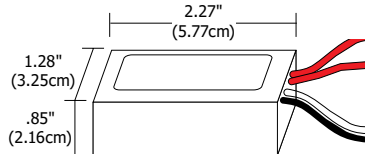

Description:

The compact, lightweight remote electronic 60W/12V LED power supply converts standard 120 volt line voltage to 12 volts and features built-in short-circuit protection. In the event of a short or overload, reset transformer at wall switch once short or overload is corrected. The single-feed transformer is both 12 volt AC LED and halogen compatible; it fits inside a 4" electrical box behind a power feed canopy.

Dimming:

Dims with Lutron Skylark or Diva electronic low voltage dimmer


Mounting Requirements:

Must be in accessible location or inside an electrical box

Weight:

.8 lb (.36 kg)

Product	Type	Voltage
TE	60L	12
TE Transformer Electronic	60L 60 Watt LED and halogen	12 12 Volt, AC

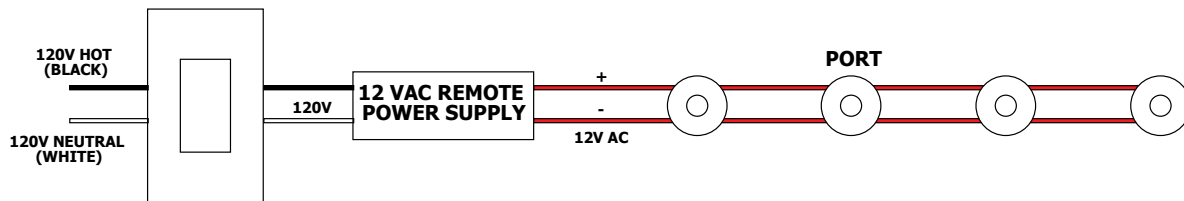

PROJECT: _____ FIXTURE TYPE: _____ DATE: _____

