



12" Round 3 & 4 Port Fast Jack Canopy


The 12" round canopies contain 3 or 4 Fast Jack Ports and mount to a standard 4" electrical box with plaster ring or an octagon box. The halogen version accepts maximum of 75 watt 12 volt load per port, total of 225 watts (3-Port) or 300 watts (4-Port). The **LED** version accepts maximum of 40 watt 12 volt load per port, total of 120 watts (3-Port) or 160 watts (4-Port). Dimmable with standard electronic dimmer. **LED** dimming range varies: reference corresponding fixture specification sheet, at www.edgelighting.com, for dimming details. *LED version can also be used with maximum of 50 watt halogen load per port.

Finish:

Satin Nickel, Polished Nickel or Antique Bronze

Weight:

4 lb (1.8 kg)

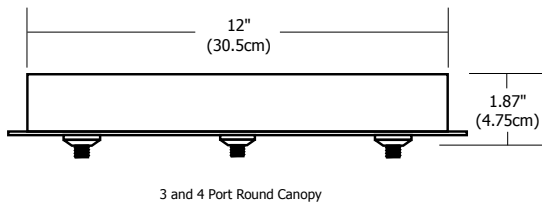

| System | Canopy | Type | Ports | Finish | Voltage Input |
|--------------------------|-----------------------|-----------------------|------------------------|--|---|
| FJP | 12RD | Halogen (leave blank) | 3 | SN | Standard 120V (leave blank) |
| FJP Fast Jack Power Feed | 12RD 12" Round Canopy | LED LED | 3 3 Ports 4 4 Ports | SN Satin Nickel PN Polished Nickel BZ Antique Bronze | 2 230V 50Hz 3 277V 60Hz (Halogen only) |



7" Round Recessed Fast Jack Canopy

The 7" Round Recessed Fast Jack Canopy retrofits an existing 6" - 6 1/2" downlight, converting it to a mono-point canopy. The 75 watt electronic transformer (included) or 60 watt LED power supply discreetly fits above canopy. Dimmable with standard electronic dimmer. **LED** dimming range varies: reference corresponding fixture specification sheet, at www.edgelighting.com, for dimming details.

General Requirements:


The recessed can transformer is compatible with: Juno IC2, TC2, and TC2R; HALO H7T and H7RT; Cooper Lighting H27RT; Capri (Thomas) Lighting PR75ASIC/TPR75ASIC/DY6431; Progress Lighting P7TG, P8TG, and PIO8-TG cans. Edge Lighting is not affiliated with nor endorsed by any of the companies listed above.

Finish:

White

Weight:

2 lb (.9 kg)

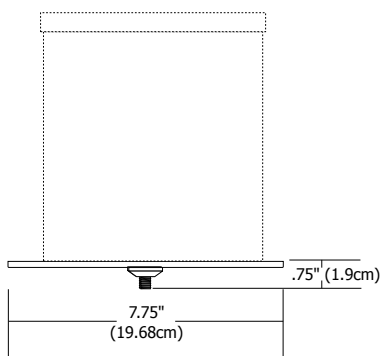

| System | Canopy | Type | Finish | Voltage Input |
|--------------------------|-----------------|-----------------------|-----------|---|
| FJP | RC | Halogen (leave blank) | WH | Standard 120V (leave blank) |
| FJP Fast Jack Power Feed | RC Recessed Can | LED LED | WH White | 2 230V 50Hz 3 277V 60Hz (Halogen only) |

Compatible Accessories or Finished Items:
All Fast Jack fixtures (sold separately).

PROJECT: _____ FIXTURE TYPE: _____ DATE: _____ **EDGE LIGHTING**