

DRISCOLL 3 & 5 LIGHT CHANDELIERS

3140403; 3140405

General Product Information



Intertek

SAVE THESE
INSTRUCTIONS!STANDARD
INSTALLATION

INDOOR



DRY LOCATION

NEC COMPLIANT
JUNCTION BOXBULB(S)
(NOT INCLUDED)

CONVERTS TO LED

PLEASE SEE
visualcomfort.com
FOR PRODUCT
SPECSCLEAN WITH SOFT,
DRY CLOTH ONLY. NO
HARSH CHEMICALS!BEST PRACTICE:
HANDLE FIXTURE
WITH GLOVES

Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL

PHILLIPS-HEAD
SCREWDRIVER

PENCIL/MARKER



WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



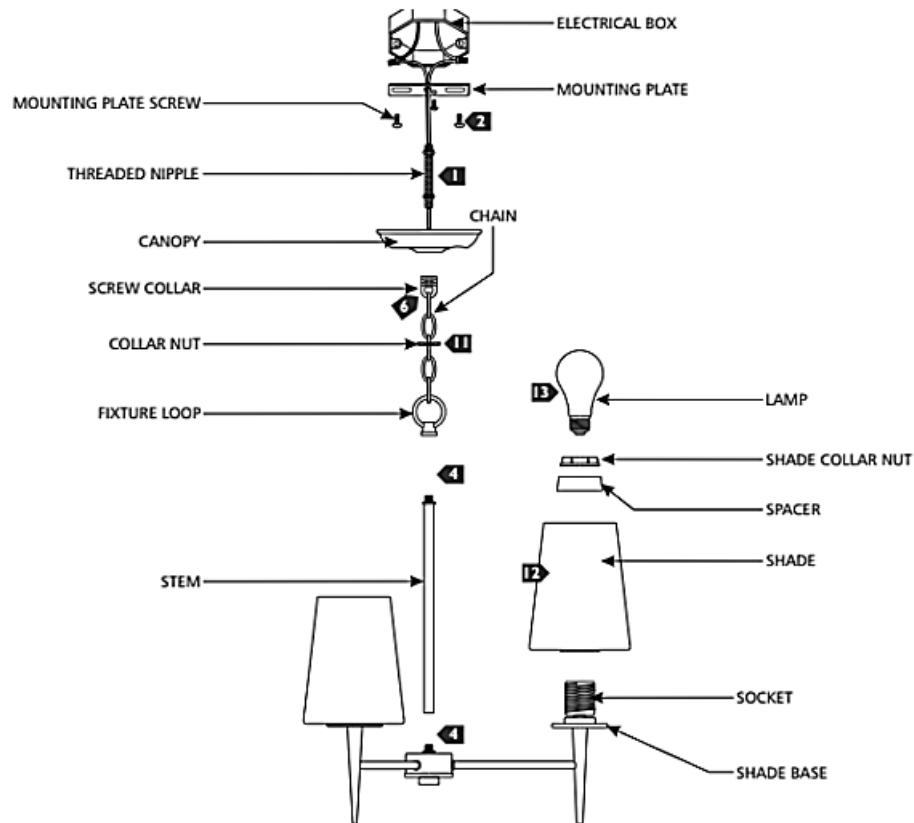

INSTRUCTIONS

I. Preparing the Fixture

1. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
2. Secure the mounting plate to the electrical box with two mounting plate screws.
3. Determine the wanted height of the fixture and remove a portion of the chain by opening a link with pliers.
4. Screw the fixture loop onto the stem and the stem onto the fixture. Open the chain link with pliers and install the chain on the fixture loop. Close the link.
5. Unscrew the collar nut from the screw collar. Install the collar nut and the canopy onto the chain in that order.
6. Open a link on the other end of the chain with pliers and install the chain onto the screw collar to secure the fixture. Close the link with pliers.
7. Weave the cord through the chain, screw collar, canopy, threaded nipple, and out of the junction box. Trim the cord, leaving enough length to make electrical connections.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire to hot power line wire
 - b) Neutral fixture wire to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar.
2. Place the shade and spacer onto the shade base and secure them in place by installing and tightly screwing the shade collar nut onto the socket; repeat for all shades.
3. Screw the lamps into the sockets.