



## DRISCOLL 1, 2, 3, & 4 LIGHT WALL

4140401; 4440402; 4440403; 4440404

### General Product Information



Product Warranty



FCC Statement

### Suggested/Required Tools



### Safety Information

#### CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



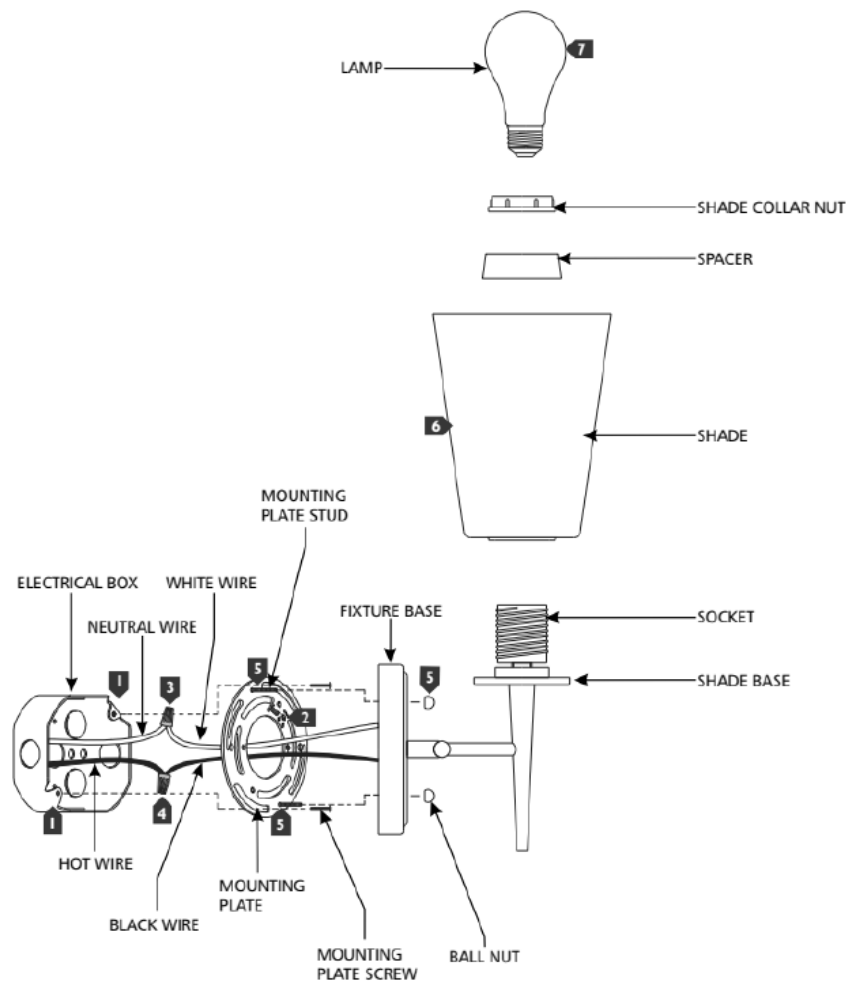

## INSTRUCTIONS

### I. Preparing the Fixture

1. Secure the mounting plate to the electrical box with two mounting plate screws. **Note:** For the single light fixture, mounting plate studs must face horizontally.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black, smooth) to hot power line wire
  - b) Neutral fixture wire (white, textured) to neutral power line wire
4. Carefully tuck all the wires into the junction box.

### III. Installing the Fixture

1. Align, then place the fixture base onto the mounting plate studs and secure it with the two ball nuts.
2. Place the shade and the spacer onto the shade base and secure them in place by installing and tightly screwing the shade collar nut onto the socket; repeat for all shades.
3. Screw the lamps into the sockets to complete the installation.