

**NLPR-56**  
5 / 6" PRISM Smart LED RGBW Retrofit Downlight (2700 to 4000K or RGB)

Source: 13W LED  
800lm

**PRODUCT DESCRIPTION**

5"/6" PRISM Smart LED RGBW Retrofit Downlights change the color of light and color temperature to meet any designer's or end user's needs as they change.

Available in baffle or reflector styles with a deep cut-off providing visual comfort, the PRISM produces 800 lumens, drawing 13W and rendering of 90+ CRI. PRISM is programmable from 2700K to 4000K when on the white color setting and offers thousands of RGBW color possibilities.

Factory set at 2700K, installed units can be adjusted to your preferred kelvin temperature or color individually or by group of fixtures. PRISM fixtures can be controlled via smartphone through the ControlLIT app or via handheld remote. PRISM utilizes a Bluetooth® mesh network, the ideal solution for "smart" lighting. A standard on/off wall switch can be used for on/off functionality. Control the lights all as one, by zone, scene, or one by one, PRISM is the new age in simple, affordable lighting control. The PRISM can be easily retrofitted into existing 4", 5" or 6" housings or installed in remodel or new construction applications.

**FEATURES**

- Control via Bluetooth on smartphone or tablet, remote control or wall switch
- Program and manage through ControlLIT™ app for both iOS and Android
- 800 Lumens utilizes only 13W
- 90+CRI
- Tunable CCT from 2700K to 4000K plus RGB
- Includes medium base socket adapter
- 5 Year limited warranty

**SPECIFICATION**

**Trim:** Spun Aluminum reflector with deep-set diffused lens for visual comfort while providing high lumen output. Spun Aluminum baffle trim with deep-set diffused lens and deep grooves to reduce aperture glare while providing high lumen output.

**Lens:** Shatter proof diffused polycarbonate lens.

**Retrofit:** PRISM series includes a medium base screw-socket adapter (NRA-211SM) for retrofitting into existing medium base downlight housings. GU24 socket adapter is available for use with GU24 housings, must specify NRA-212SM.

**ELECTRICAL**

**Input Voltage:** 120V  
**Input Current:** 0.13A  
**Delivered Lumens / Wattage:** 800lm / 13W  
**CRI:** 90+CRI  
**Operating Temp.:** 0°C to 45°C ambient temperature  
**Life Expectancy:** 50,000 hours

**DIMMING**

Dimming is only accomplished through the hand-held remote or the ControlLIT™ app. PRISM is not dimmable by a wall mounted dimmer. In retrofit applications, Nora recommends removing any existing dimmers that control a circuit where PRISM fixtures are to be installed.

**CONTROL**

PRISM fixtures can be controlled via smartphone through the ControlLIT app (free from Google Play or the App Store) or via handheld remote. PRISM utilizes a Bluetooth® mesh network, the ideal solution for "smart" lighting. A standard on/off wall switch can be used for on/off functionality. Control the lights all as one, by zone, scene, or individually. The app can program up to eight zones. Additional programming includes auto on, auto off of zones and the ability to change automatically to beat of music.

**ControlLIT™ App:**

- Compatible with iOS or Android systems
- Download the latest version of the ControlLIT™ app from the Google Play store or the App Store.




For inquiries, e-mail ControlLIT@noralighting.com

**LABELS AND LISTINGS**


- cULus classified for Wet Locations ENERGY STAR certified
- 5-Year Limited Warranty
- Can be used to comply with 2016 Title 24 – part 6 High Efficacy LED light source requirements



**PRODUCT IMAGES AND DIMENSIONS**

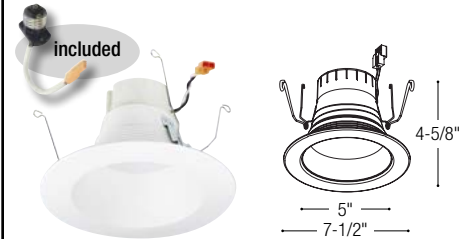

**NLPR-5641 5"/6" Reflector**  
BB, BZBZ, HZW, WW

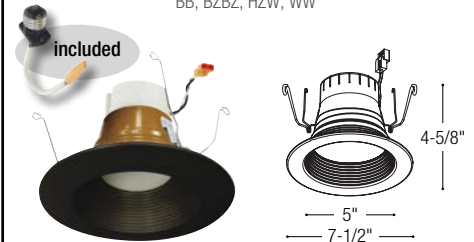

**NLPR-5642 5"/6" Baffle**  
BZBZ, WW

**5" / 6" COMPATIBLE HOUSINGS**

PRISM reflectors are compatible with most 5" and 6" IC and Non-IC housings by Nora and others.

**FireBox**

**NFBIC-5LMRAT** 5" ICAT Dedicated LED 2-Hour Fire Rated

**New Construction**

**NHIC-5LMRAT** 5" ICAT Dedicated LED  
**NHIC-5LMRAT/277** 5" ICAT Dedicated LED, 277V  
**NHIC-527LMRAT** 5" ICAT Shallow Dedicated Housing  
**NHIC-501QAT** 5" ICAT Line Voltage  
**NH-501Q** 5" Line Voltage  
**NHIC-5G24ATFL** 5" ICAT GU24 (NRA-212SM required)

**Remodel**

**NHRIC-5LMRAT** 5" ICAT Dedicated LED  
**NHRIC-527LMRAT** 5" ICAT Shallow Remodel Dedicated Housing  
**NHRIC-504QAT** 5" ICAT Line Voltage  
**NHR-504Q** 5" Line Voltage  
**NHRIC-5G24ATFL** 5" ICAT GU24 (NRA-212SM required)

**FireBox**

**NFBIC-6LMRAT** 6" ICAT Dedicated LED 2-Hour Fire Rated  
**NFBIC-6INCAT** 6" ICAT Line Voltage Dedicated 2-Hour Fire Rated

**New Construction**

**NHIC-6LMRAT** 6" ICAT Dedicated LED  
**NHIC-6LMRAT/277** 6" ICAT Dedicated LED, 277V  
**NHIC-27LMRAT** 6" ICAT Shallow Dedicated Housing  
**NHIC-17QAT** 6" ICAT Line Voltage  
**NHIC-17QNBAT** 6" ICAT Line Voltage (No Bracket)  
**NH-26Q** 6" Line Voltage  
**NH-26QNB** 6" Line Voltage (No Bracket)  
**NHIC-6G24ATFL** 6" ICAT GU24 (NRA-212SM required)

**Remodel**

**NHRIC-6LMRAT** 6" ICAT Dedicated LED  
**NHRIC-27LMRAT** 6" ICAT Shallow Remodel Dedicated LED Housing  
**NHRIC-17QAT** 6" ICAT Line Voltage  
**NHRIC-17QNBAT** 6" ICAT Line Voltage (No Bracket)  
**NHR-26Q** 6" Line Voltage  
**NHRIC-6G24ATFL** 6" ICAT GU24 (NRA-212SM required)

**5" / 6" PRISM Smart LED RGBW Retrofit Downlight**

Series / Aperture	Reflector Type	Source	Reflector / Flange Finish
<b>NLPR-56 = 5" / 6"</b>	<b>41</b> = Reflector	<b>RGBW</b>	<b>/BB</b> = Black / Black
	<b>42</b> = Baffle		<b>/BZBZ</b> = Bronze / Bronze
			<b>/HZW</b> = Haze / White
			<b>/WW</b> = White / White

Example: **NLPR-5641RGBW/WW** 5"/6" PRISM Smart LED RGBW Retrofit Downlight, Reflector, White Reflector / White Flange

**NLPR-56**

**5 / 6" PRISM Smart LED RGBW Retrofit Downlight Accessories**



**PRISM Master Remote Control**  
NLPR-RGBWCONT Master

Master control for all installed PRISM downlights in an application. Controls on/off functionality, dimming, change of color temperature and change of light color. Master Remote will operate PRISM without using the ControlLIT app. If app is used, it will be necessary to program (find) master control through the ControlLIT app.

Master remote includes holster for wall mounting. Requires (2) AAA batteries (NOT included)



**PRISM Zone Remote Control**  
NLPR-ZONECONT Zone


Control for a specified zone of installed PRISM downlights. Controls on/off functionality, dimming, change of color temperature. Each zone remote can be programmed to control up to four zones. Multiple zone control remotes can be used in a single environment. Zone remotes will not work until zones have been created through the ControlLIT app.

Zone remote includes holster for wall mounting. Requires (2) AAA batteries (NOT included)



**PRISM Decora Wall Switch**  
NLPR-DWC-RGBWCONT Master

Requires NO wiring and works just like a master remote control. Controls all installed PRISM downlights in an application. Controls on/off functionality, dimming, change of color temperature and change of light color. Can be mounted in a wall switch and removed with a magnetic strip mounted on the back.



**PRISM Smartphone Application**  
ControlLIT

Compatible with iOS or Android Systems. Download the free app from the Google Play Store or the App Store.

Use the application to login and program each PRISM luminaire, program remotes, create zones, create scenes, set timers and change fixture's names.

Additional features include: setting color temperatures, changing color of light, music mode (changes color of light to the beat of music) or party mode (changes color of light randomly)



**Medium Base Socket**  
NRA-211SM

Screw in medium base socket for retrofitting into existing medium base downlight housings. One NRA-211 is included with each PRISM.




**GU24 Socket Adapter**  
NRA-212SM

GU24 socket adapter for use with GU24 base housings.

**NLPR-56**

5 / 6" PRISM Smart LED RGBW Retrofit Downlight Accessories

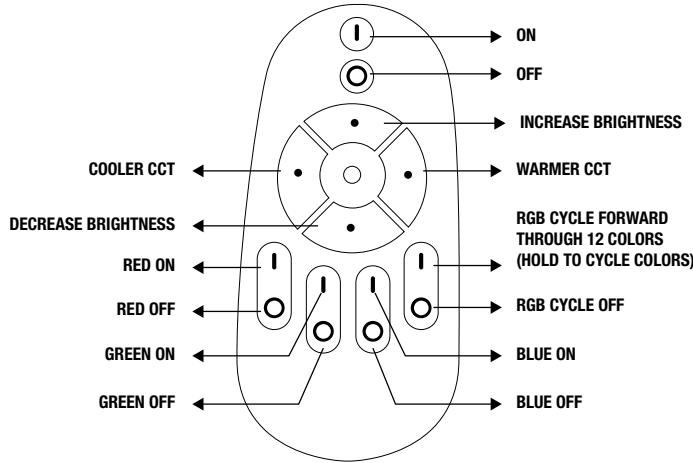

RED, GREEN AND BLUE BUTTONS CAN BE DIMMED


**PRISM Master Remote Control Function**

Dimensions (with holster)

4.375" tall

2.25" wide

.875" deep

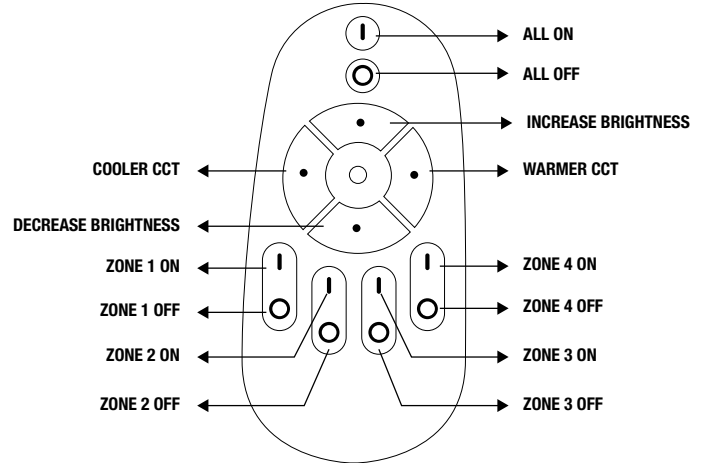

**PRISM Zone Remote Control Function**

Dimensions (with holster)

4.375" tall

2.25" wide

.875" deep