
Page 1 of 1

6 3/4" Aperture Incandescent Insulated Ceiling, AirSeal® Frame-In Kit

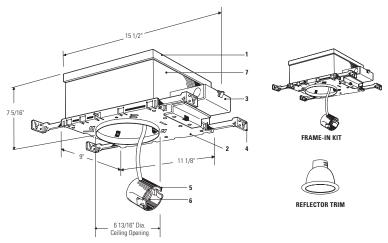

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Frame-In Kit	Reflector	Trims –	– See Ir	ndividual	Reflecto	r Trim	<b>Specifica</b>	tion Shee	ets		
	Open Downlight						Adjustable			0	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
	Reflector	Satin Cone	Sloped Ceiling	Baffles	Basic White	Cross Blade	Recessed Line Volt.	Recessed Low Volt.	Enclosed Diffusers	Open Wet Location	Wall Washer
1100AICM	1143 1144 1144CD	1108 1108NM 1110 1110NM	1131 1131WH 1131GD 1131CL 1131BK	1105 1105WH 1105NM 1105BNM 1176	1170M1 1171	1132	1129NM 1129 1129CD 1129CDNM 1129WH	1155 1155WH 1161 1161WH 1163	1121 1124 1126 1128 1134	1184CD 1184WH	1185 1186 1186WH
	Cone:	1	1133	1176WH			1129CL	1164	1177SH		
	1112 1112NM 1113 1113BK 1113WH 1113CD 1113NM 1113BKNM		1133WH 1133GD 1133CL 1133BK 1154 1154WH 1154BK 1154GD	1179M1 1179WH			1129GD 1129BK Eyeball 1122 1123 1182		1178SH 1190		
	1113CDNM		1154CL 1154CD				1122WH 1123WH				

## **Features**

- 1. Housing: 0.026" galvanized steel. UL listed for direct contact with thermal insulation. AirSeal® housing minimizes air leakage to less than 2 CFM at 1.57 PSF, which complies with Model Energy Code (Section 602.3.3) and the Washington State Energy Code (Section 502.4) and reduces heat loss and condensation in ceiling. Access door for inspection of junction box.
- Mounting Frame: 0.036 (#20 ga.) galvanized steel. Accommodates all ceilings up to 1" thick. 3/8" deep integral lip. Four slots are positioned 90° apart to simplify alignment. Push-in/twist-out rotoclips hold reflector flush to ceiling.
- 3. Junction Box: 2" X 4" X 4": 0.063" (#14 ga.) galvanized steel. UL listed for maximum of 6 No. 12 ga., 90° C through branch circuit conductors. Quick release "L" shaped cover for outside access to wiring. Access door inside of housing allows easy inspection of wiring without removal of housing. Integral cable clamps permit attachment of nonmetallic Romex® or armored cable without the need for additional connectors.
- 4. Mounting Bars: 0.059" (#16 ga.) galvanized steel. 13" long bars extend to 27", rotatable and lockable, with integral T-bar tabs. Attach to wood joist or T-bar ceilings without need of accessories.
- 5. Socket Housing: Impact extruded aluminum or galvanized steel.
- **6. Socket:** Porcelain medium base; nickel plated screw shell. Pre-wired with #18 ga. SF1 leads to junction box.
- Thermal Protector: Meets NEC and UL requirements. Located inside housing.

## **Options & Accessories**

Mounting Bars: 1976 - 13" set of (4).

Extra-Thick Ceiling Mounting Ring: 1967A - up to 2" thick ceilings

## Labels

UL Type I.C. (Suitable for Damp Locations);

Complies with Air Leakage Requirements as stated in the Model Energy Code, California Title 24 and the Washington State Energy Code.

AirSeal® is a registered trademark of Lightolier Romex® is a registered trademark of General Cable Industries Inc.

Job Information	Туре:
Job Name:	
Cat. No.:	
Lamp(s): Notes:	

**Lightolier** a Genlyte company www.lightolier.com 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. © 2006 Genlyte Group LLC • D0906