

# Langston Large Wall

700WSLGSN18\_ 1.0



### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is suitable for damp locations.

This instruction shows a typical installation.



**CAUTION - RISK OF FIRE**  
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
**Use minimum 90°C supply conductors.**


**SAVE THESE INSTRUCTIONS!**

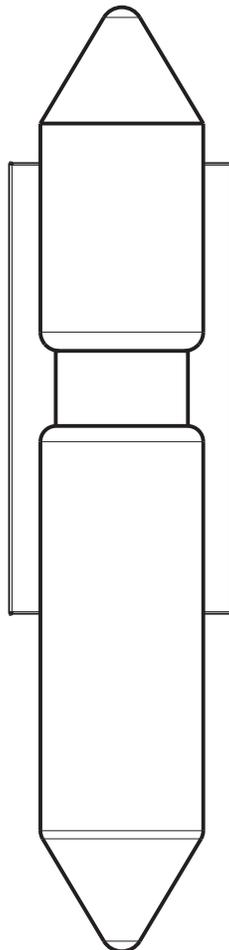

**TECH LIGHTING**  
 7400 Linder Ave., Skokie, IL 60077  
 T 847.410.4400 | F 847.410.4500  
[www.techlighting.com](http://www.techlighting.com)

# Install the Fixture

1A

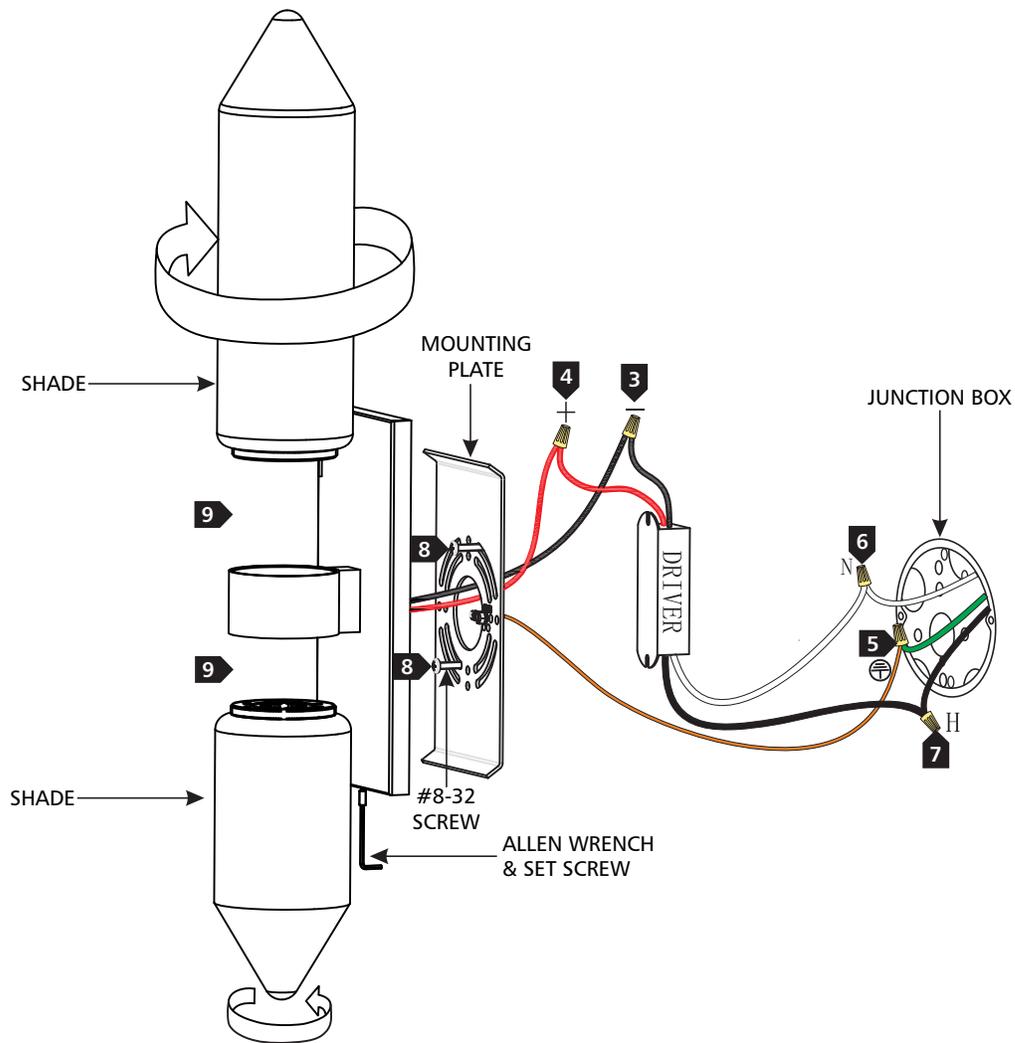

- 1 With the provided Allen wrench, loosen (do not remove) the set screw on the fixture base.
- 2 Remove the mounting plate from the fixture base
- 3 Connect the negative (-) fixture wire to the negative (-) driver output wire with a wire nut.
- 4 Connect the positive (+) fixture wire to the positive (+) driver output wire with a wire nut.
- 5 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 6 Connect the white input driver wire to the neutral power line with a wire nut.
- 7 Connect the black input driver wire to the hot power line with a wire nut.
- 8 Properly place the driver, all wires, and wire nut connections into the junction box and install the mounting plate to the junction box with the two #8-32 screws provided.
- 9 Screw the shades onto the fixture.
- 10 Mount the fixture base onto the mounting plate, and secure it in place by tightening the set screw using the provided Allen wrench.