

T~TRAK

POWER JACK


GENERAL PRODUCT INFORMATION:



This product is suitable for indoor dry locations only.


This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.

This product is intended for use only with Tech Lighting Power Jack & T~trak™ systems.

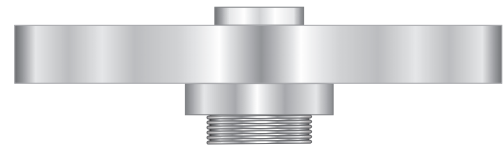


CAUTION — RISK OF FIRE
 This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **TURN OFF POWER TO THE ELECTRICAL BOX.**

Install the Power Jack Canopy

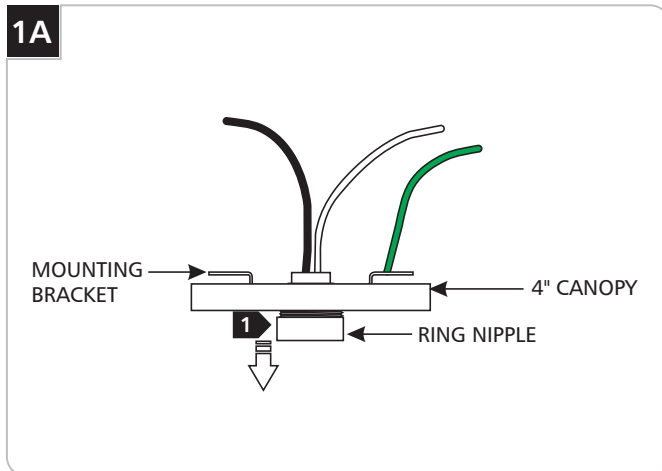

1 Unscrew the ring nipple and detach the 4" canopy from the mounting bracket.

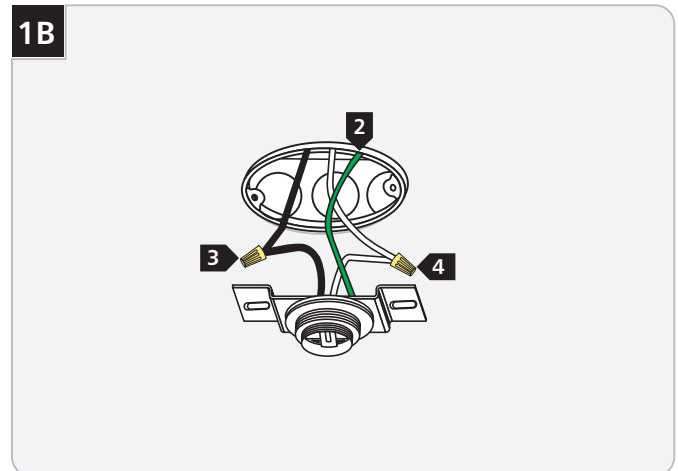


2 Connect the ground wire in accordance with local electrical codes.

3 Connect the black power feed wire to the hot power line wire with a wire nut.

4 Connect the white power feed wire to the neutral power line wire with a wire nut.


Connect the Line Voltage Head Fixture to Power Jack Canopy

1C

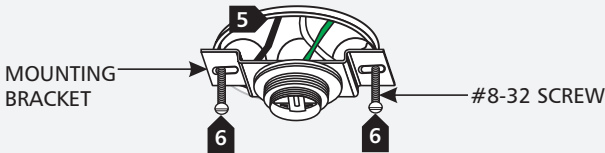


- 5 Properly place all wires into the electrical box.
- 6 Line up the mounting bracket holes with the electrical box holes. Secure the mounting bracket to the electrical box with the two provided #8-32 screws.

1D

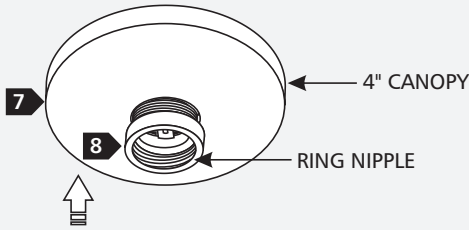

- 7 Replace the 4" canopy onto the mounting bracket.
- 8 Screw the ring nipple to the mounting bracket to properly hold the 4" canopy in place.


2A

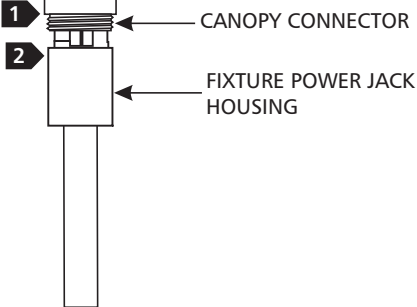

- 1 Line up the fixture Power Jack housing with the canopy connector.
- 2 Screw the fixture Power Jack housing to the canopy connector tight.


NOTE: In case of cross threading, unscrew the fixture Power Jack housing from the fixture connector and repeat steps 1 & 2.

SPECIAL INSTALLATION: Locking the Fixture in Permanent Position (Optional)

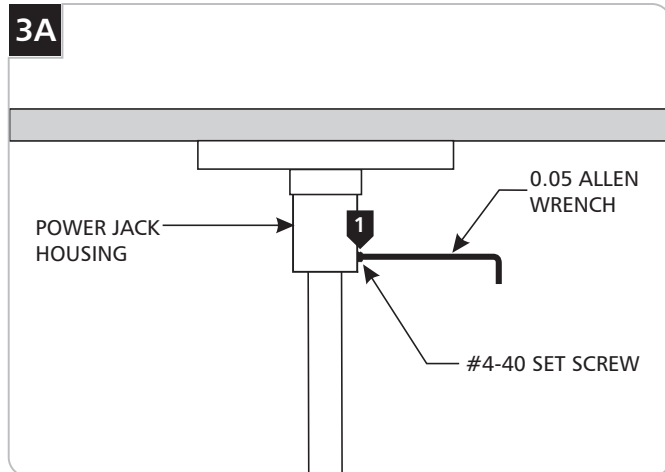

- 1 To lock the fixture head in a permanent horizontal position, tighten the #4-40 set screw on the fixture Power Jack housing with the provided 0.05 Allen wrench.

Connect the Line-Voltage Pendant Fixture to Power Jack Canopy

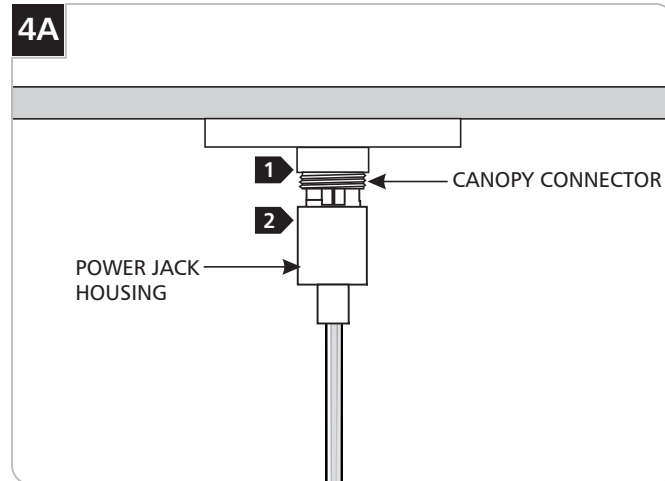

- 1 Line up the Power Jack housing with the canopy connector.
- 2 Screw the Power Jack housing to canopy connector tight.

NOTE: In case of cross threading, unscrew the fixture connector from the Power Jack housing and repeat steps 1 & 2.

SAVE THESE INSTRUCTIONS!

T~TRAK
a brand of **TECH LIGHTING®**

7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.ttraklighting.com

© 2010 Tech Lighting, L.L.C. All rights reserved. The "T~trak"™ graphic is a registered trademark of T~trak™. T~trak™ reserves the right to change specifications for product improvements without notification.
A Generation Brands Company