


MonoRail Remodel Recessed Transformer Low-Profile-300W Electronic

DESCRIPTION

This single-feed remodel recessed transformer converts standard 120 line-voltage to 12 volts to provide the necessary voltage for powering a MonoRail low-voltage lighting system. It can power lamps totaling up to 300 watts. The transformer installs in similar fashion as a remodel recessed downlight and is concealed inside a housing that recesses above the ceiling. The decorative housing is the only visible portion of the transformer once installed. Should a short occur a fast acting secondary circuit breaker that will safely turn the system off. Once the short has been removed the unit can be reset by simply flipping the wall switch off and back on. Dimmable with a 600 watt low-voltage electronic dimmer. Not compatible with Power Extenders or Standoff Vault Adapter.

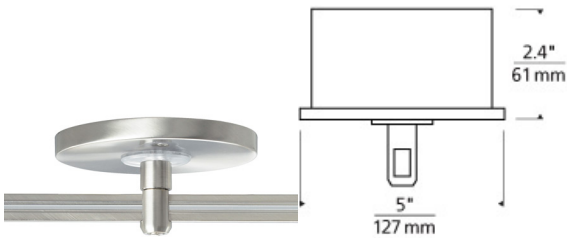

INSTALLATION

In remodel applications, install the Remodel Recessed Transformer in close proximity to an existing junction box, drill through the finished ceiling in the location where the Remodel Recessed Transformer will be installed, and cover the existing junction box with a thin, field-paintable metal cover (included) as the NEC requires. In new construction, bring power to the Remodel Recessed Transformer directly. Insulation must be kept at least 3" from the transformer and housing (non-IC).

OTHER

White finish has satin nickel feed. The only rigid standoff that can be used with this surface transformer is the 1" rigid standoff (sold separately). 12 volt transformers require the use of 12 volt lamps.

WEIGHT

1.08lb / 0.49kg ±



monorail remodel
recessed
transformer low-
profile-300w
electronic

ORDERING INFORMATION

700MOSRR301E FINISH

- Z ANTIQUE BRONZE
- C CHROME
- S SATIN NICKEL
- W WHITE



TECH LIGHTING®

7400 Linder Avenue T 847.410.4400
Skokie, Illinois 60077 F 847.410.4500

Tech Lighting, L.L.C.

700MOSRR301E ____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____

