


TWIGGY T1, TUBULAR 1" LENS 120V/12VAC FIXTURE, 92+CRI



MADE IN THE USA

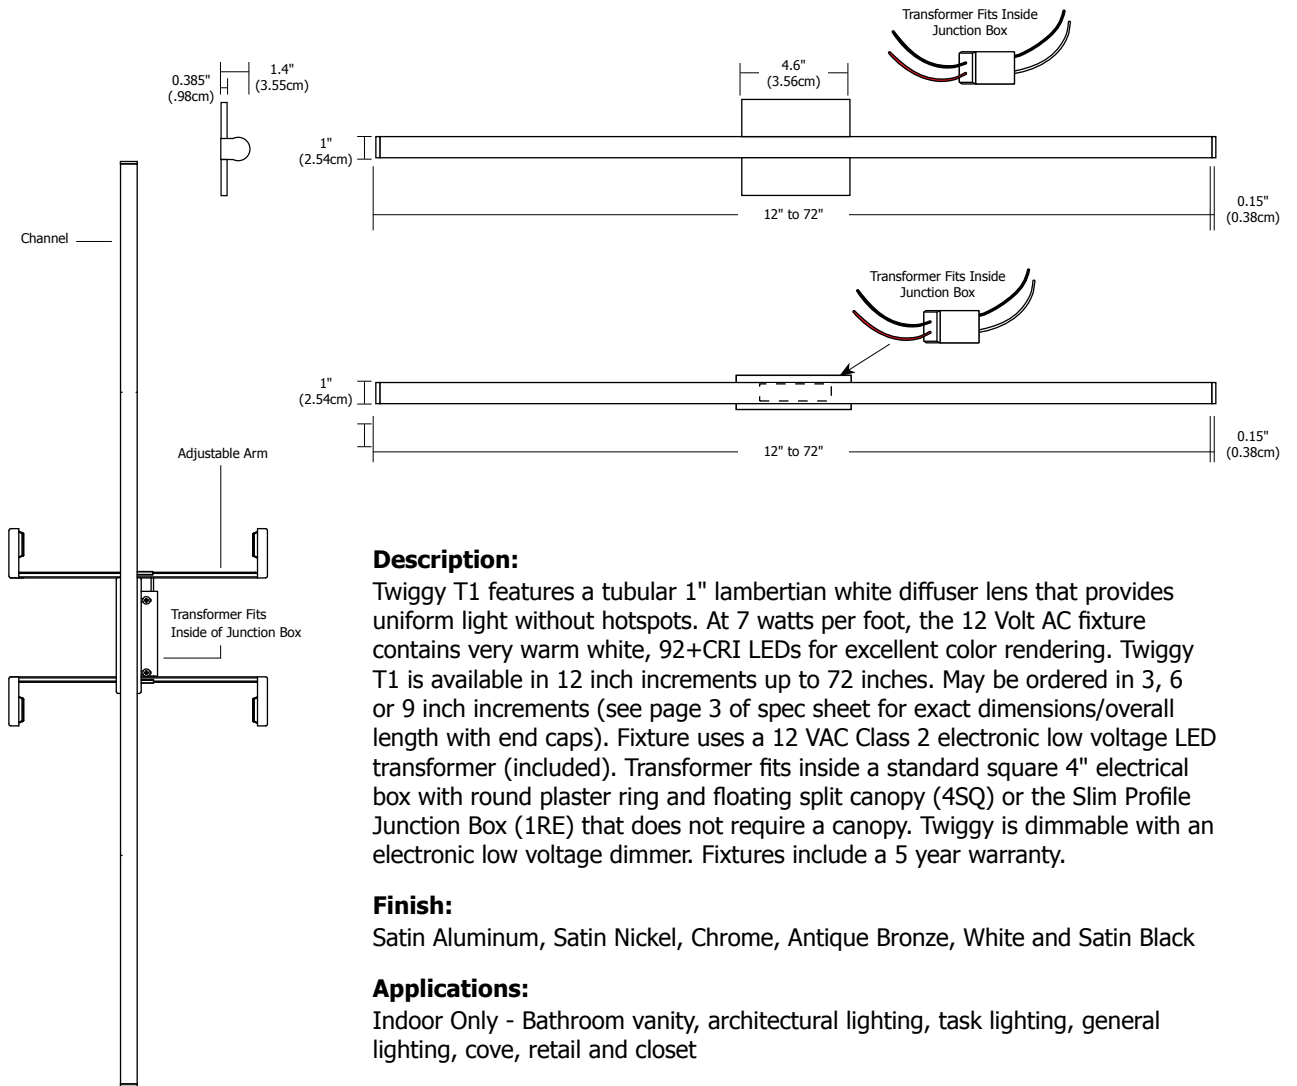

Description:

Twigg T1 features a tubular 1" lambertian white diffuser lens that provides uniform light without hotspots. At 7 watts per foot, the 12 Volt AC fixture contains very warm white, 92+CRI LEDs for excellent color rendering. Twigg T1 is available in 12 inch increments up to 72 inches. May be ordered in 3, 6 or 9 inch increments (see page 3 of spec sheet for exact dimensions/overall length with end caps). Fixture uses a 12 VAC Class 2 electronic low voltage LED transformer (included). Transformer fits inside a standard square 4" electrical box with round plaster ring and floating split canopy (4SQ) or the Slim Profile Junction Box (1RE) that does not require a canopy. Twigg is dimmable with an electronic low voltage dimmer. Fixtures include a 5 year warranty.

Finish:

Satin Aluminum, Satin Nickel, Chrome, Antique Bronze, White and Satin Black

Applications:

Indoor Only - Bathroom vanity, architectural lighting, task lighting, general lighting, cove, retail and closet

Lamp:

Very warm white (2700K) LEDs, 92+CRI
LED lamps consume 7 watts per foot
48 lumens per watt; 366 lumens per foot; 70 R9 Value

Average Lamp Life:

50,000 hours

Transformer:

120V input, 12VAC Class 2 output; electronic low voltage LED transformer (included) fits inside standard junction box

Dimming:

Dimmable with electronic low voltage dimmer
Lutron: Diva #DVELV-300P; Skylark #SELV-300P dimmers recommended

Very Warm White	
Distance	Foot Candles
12in	218
24in	82
36in	49
48in	29


Product	Lens	Canopy	Length In Inches	Color Temperature	Finish
TW12	T1	1RE	21IN	27K	SA
TW12 Twigg 12 Volt	T1 Tubular 1"	1RE 1" Rectangle with Junction Box 4SQ 4" Square	12-72 Order in 12 inch increments up to 72 inches May be ordered in 3, 6 or 9 inch increments	27K 2700K Very Warm White	SA Satin Aluminum SN Satin Nickel CH Chrome BZ Antique Bronze BK Satin Black WH White

*Overall length with end caps is 1" longer than ordering code. See chart on page 3 for dimensions.

TWIGGY T1, TUBULAR 1" LENS 120V/12VAC FIXTURE, 92+CRI



- Application:** Electronic low voltage dimming for Twiggy Tubular
- Power Supply:** 120V input, 12VAC class 2 output; electronic low voltage LED transformer (included) that fits inside standard junction box
- Dimming:** Dimmable with electronic low voltage dimmer. Lutron: Diva #DVELV-300P; Skylark #SELV-300P dimmers recommended

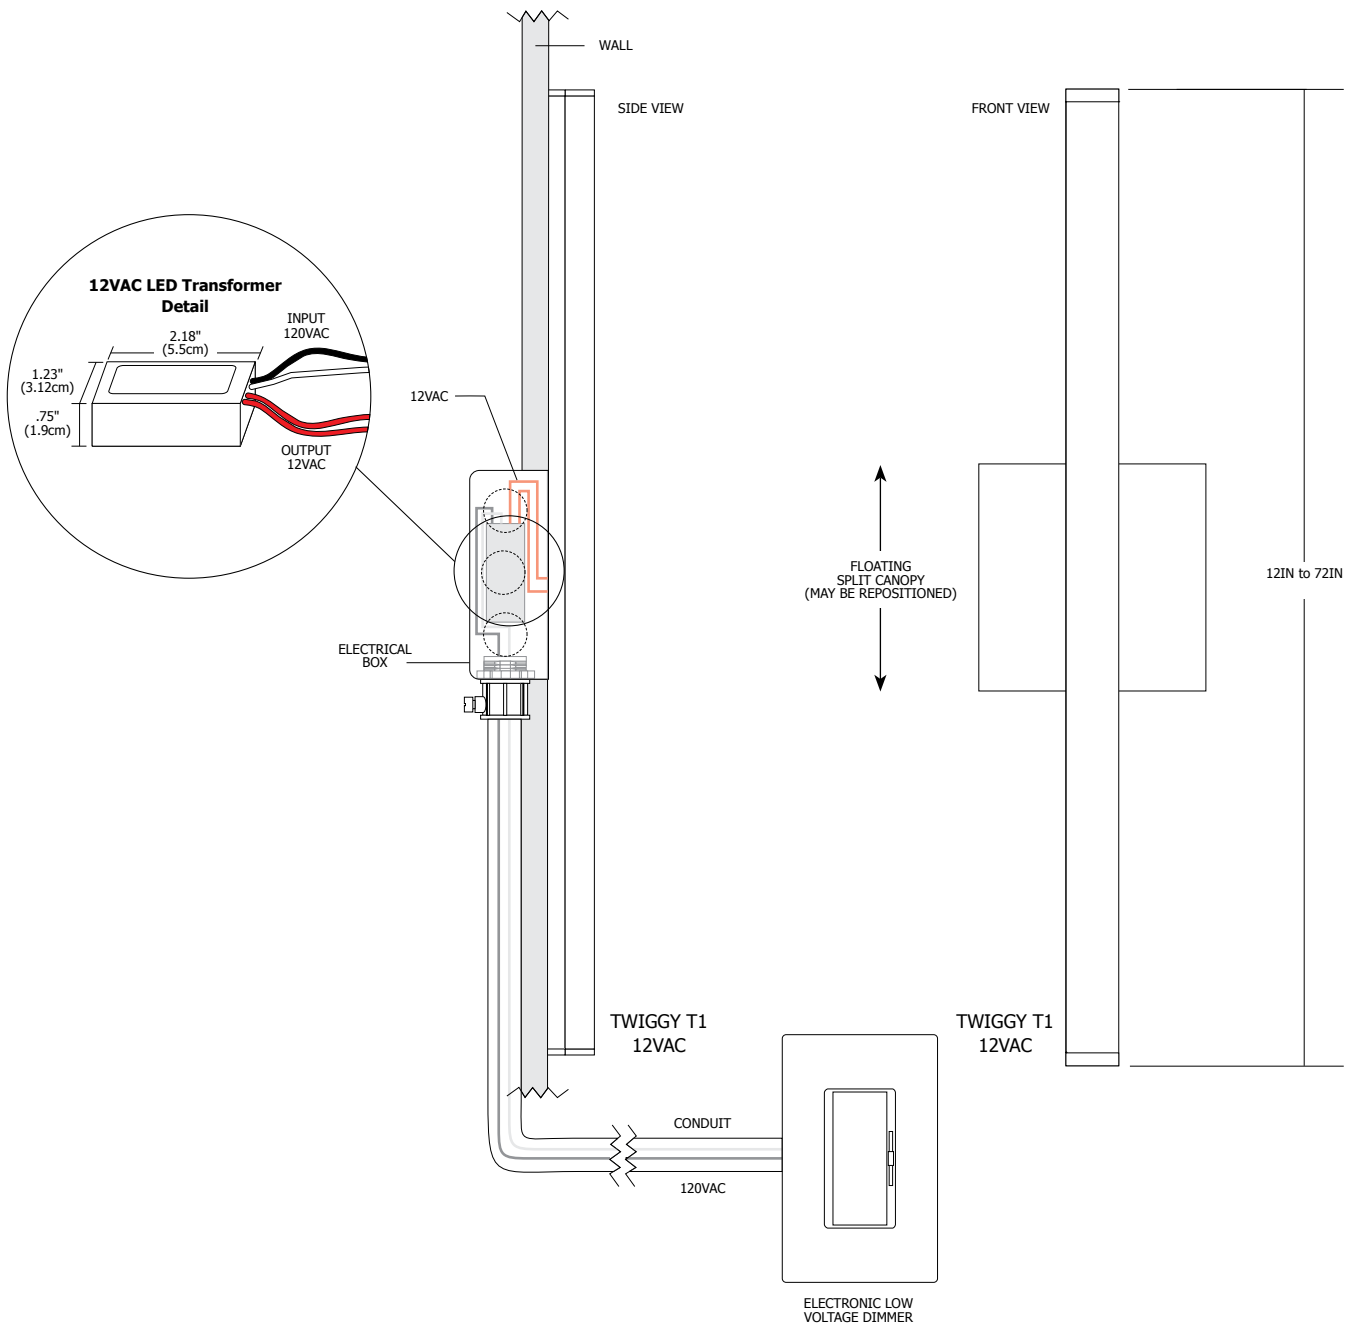

PROJECT: _____ FIXTURE TYPE: _____ DATE: _____



TWIGGY T1, TUBULAR 1" LENS 120V/12VAC FIXTURE, 92+CRI



Please refer to chart below for overall length (with end caps) of Twiggy T1

ORDERING CODE	OVERALL LENGTH (INCHES)
12IN	13
15IN	16
18IN	19
21IN	22
24IN	25
27IN	28
30IN	31
33IN	34
36IN	37
39IN	40
42IN	43
45IN	46
48IN	49
51IN	52
54IN	55
57IN	58
60IN	61
63IN	64
66IN	67
69IN	70
72IN	73

PROJECT:

FIXTURE
TYPE:

DATE: