

# Shanti Pendants

SLPD13227, SLPD13327, SLPD13427, SLPD13527

1.1

# VISUAL COMFORT & Co.

## MODERN COLLECTION

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Dimmable with most LED compatible ELV, TRIAC and 0-10V dimmers. Ships with 4-12" and 2-6" rigid stems.

Sloped ceiling compatible up to 22.5°.

This instruction shows a typical installation.



### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

### SAVE THESE INSTRUCTIONS!




Visual Comfort & Co.

7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F 847.410.4500

www.visualcomfort.com

## Install the Fixture

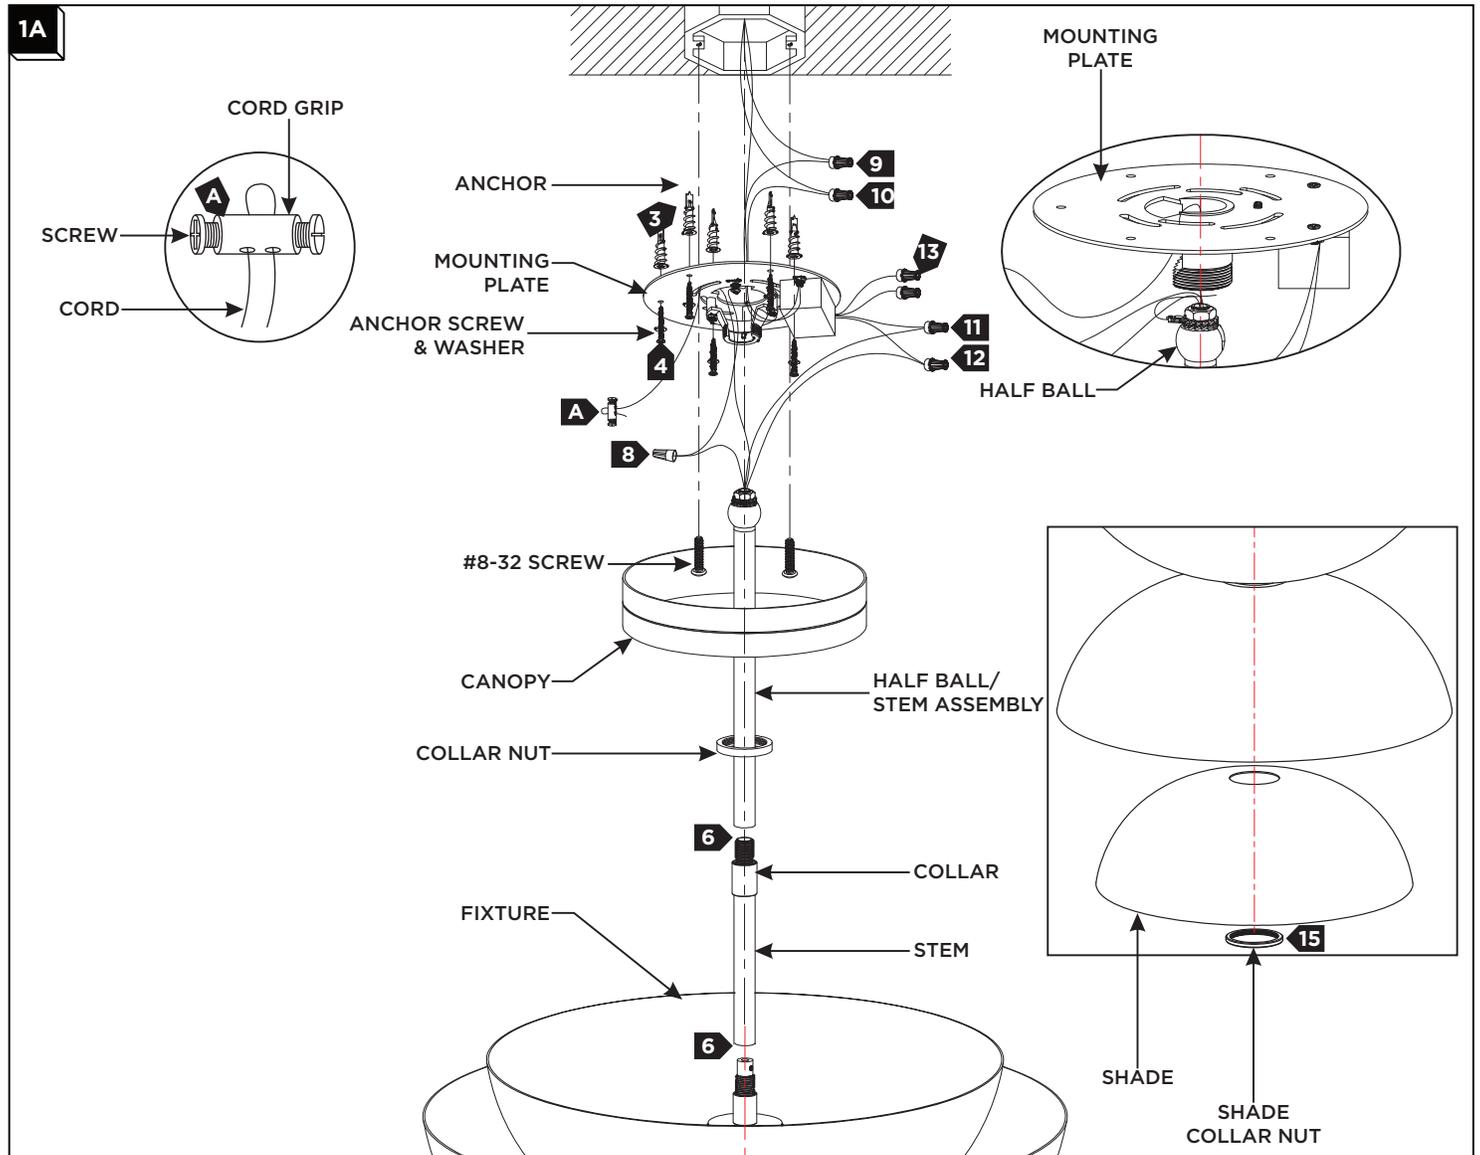

- 1** Remove the mounting plate from the canopy.
- 2** Temporarily install the mounting plate to the junction box with the two #8-32 screws provided. Mark the location of the anchors and remove the mounting plate.
- 3** Line up an anchor tip with the center of an anchor hole in the marked position, and push the anchor into the ceiling up to the threads. Screw the anchor in the rest of the way with a Phillips-head screwdriver. Repeat this step for the remaining anchors.
- 4** Reinstall the mounting plate to the junction box. Then slide an anchor screw through a washer and screw it into an anchor to secure the mounting plate to the ceiling. Repeat this step for the remaining anchor screws.
- 5** Slide the canopy, then the collar nut onto the half ball/stem assembly.
- 6** **Adjust the Fixture Height:** Determine the desired height of the fixture using the provided stems, collars, and half ball/upper stem. Feed the fixture wires through each section of the stem assembly, screwing the sections together as each piece is added. Once the desired height is reached screw the entire stem assembly to the top of the fixture.
- 7** Remove the cable grips at A, pull the cable up and down through the mounting plate as shown, feed the cable through the cable grips, and secure them to the mounting plate as shown. Tighten the screws to secure the cable.
- 8** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 9** Connect the white input driver wire to the neutral power line wire with a wire nut.
- 10** Connect the black input driver wire to the hot power line wire with a wire nut.
- 11** Connect the negative (-) fixture wire to the negative (-) output driver wire with a wire nut.
- 12** Connect the positive (+) fixture wire to the positive (+) output driver wire with a wire nut.
- 13** **If using 0-10V dimming**, connect the purple and gray/pink wires to a compatible dimmer. **If not using 0-10V dimming**, make sure to cap off these wires.
- 14** Neatly place the driver, wires, and wire nut connections inside the junction box/canopy, then slide the canopy up over the mounting plate and secure in place with the collar nut.
- 15** Install the shade to the fixture and secure it in place with the shade collar nut.