

3/8" Feed Through Power Stem





4.6" Round Canopy



2.8" Square Canopy



4.6" Square Canopy

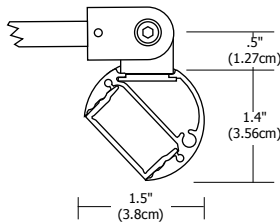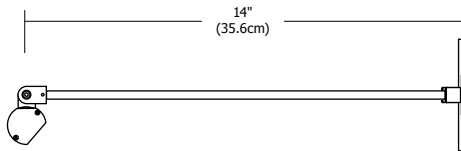

**Description:**

Kurve Display Sign features a lambertian white diffuser that provides uniform light without hotspots. At 7.5 watts per foot, the 24 volt DC channel contains 85+ or 95+ CRI LEDs and mounts 14" from wall. It may be ordered with a 4.6" round or square canopy that fits on a standard 4" square electrical box with round plaster ring; a 2.8" square canopy, or a special feed-thru stem for floating signs. Kurve is powered by a Class 2 remote power supply up to 40 feet away. Available from 12 inches to 120 inches/10 feet. May be ordered in 3, 5, 8 or 10 inch increments. Fixtures include a 5 year warranty.

**Finish:**

Satin Nickel, Chrome, Antique Bronze, Satin Aluminum, White or Satin Black Custom finishes available

**Applications:**

Wall wash and retail stores

**Lamp:**

Version	Watts per Foot	Lumens per Watt per Foot	85+CRI 24K, 35K, 40K, 57K	95+CRI 27K, 30K	50,000 Hour Lamp Life
<b>7WDC</b>	7.5	36	●	●	●

Lumen values are based on the 3000K LED test.

**Power Supply (24VDC):**

- PSB-25W-010-24VDC** 120VAC input, 25 watt output
- TEB-60L-24DC** 120VAC input, 60 watt output
- PSB-60W-ELV-24VDC** 120VAC input, 60 watt output
- PSB-96W-010-24VDC** 120-277VAC input, 96 watt output
- PSB-100W-ELV-24VDC** 120VAC input, 96 watt output
- PSB-2X96W-010-24VDC** 120-277VAC input, 2x96 watt output
- PSB-2X100W-ELV-24VDC** 120VAC input, 2x96 watt output


**Dimming:**

010 power supplies use 0-10V dimmer: Philips Sunrise SR1200ZTUNV. ELV power supplies use ELV dimmer: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

System	Wattage/Voltage	Canopy	Length In Inches	Color Temperature	Finish
<b>KD</b>	<b>7WDC</b>	<b>4RD</b>	<b>120IN</b>	<b>27K</b>	<b>SN</b>
<small>KD Kurve Display</small>	<small>7WDC 7.5 Watt 24 Volt DC</small>	<small>2SQ 2.8" Square 4RD 4.6" Round 4SQ 4.6" Square FTP Feed-Through Power Stem</small>	<small>12-120 Order in 12 inch increments up to 120 inches May be ordered in 3, 5, 8 or 10 inch increments</small>	<small>24K 2400K Amber White 27K 2700K Very Warm White 30K 3000K Warm White 35K 3500K Neutral White 40K 4000K Cool White 57K 5700K Daylight White</small>	<small>SN Satin Nickel CH Chrome BZ Antique Bronze SA Satin Aluminum BK Satin Black WH White</small>

PROJECT: \_\_\_\_\_ FIXTURE TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_


# KURVE DISPLAY SIGN 24VDC SYSTEM, 85 OR 95+CRI

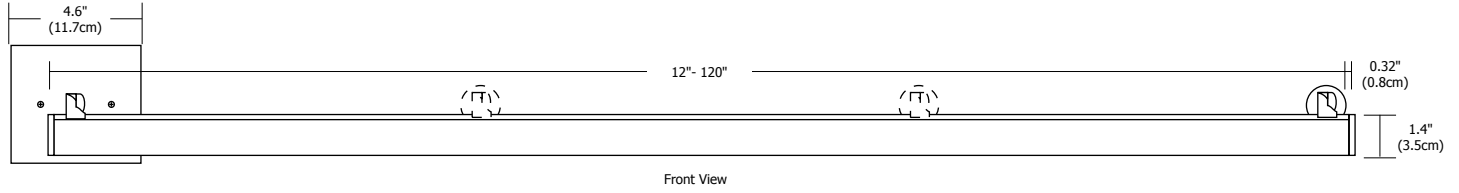

**Application:** 0-10V dimming for Kurve Display Sign

**Power Supply:** Class 2, 24VDC output: 120VAC input, PSB-25W-010-24VDC; 120-277VAC input, PSB-96W-010-24VDC; PSB-2X96W-010-24VDC

**Dimming:** Dimmable with 0-10V dimmer using power supplies above: Philips Sunrise SR1200ZTUNV, 0-10V dimmer recommended.

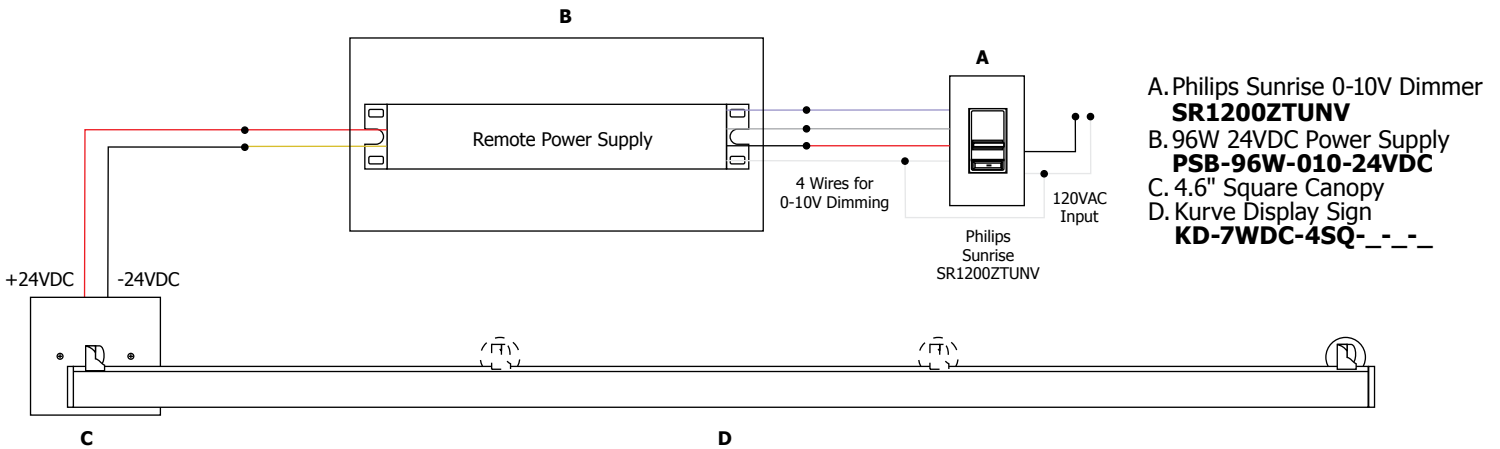

Fixture Mounted 14 inches from wall

	████████████████████					
1'	91	91	91	91	91	91
2'	52	52	52	52	52	52
3'	28	28	28	28	28	28
4'	22	22	22	22	22	22
5'	14	14	14	14	14	14
6'	11	11	11	11	11	11
7'	9	9	9	9	9	9
8'	5	5	5	5	5	5

PROJECT: \_\_\_\_\_ FIXTURE TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_