

INSTALLATION INSTRUCTIONS

Zoron Wall Mount

W4R, W4S



CAUTION: TO PREVENT ELECTRICAL SHOCK, ENSURE ELECTRICITY HAS BEEN TURNED OFF AT THE CIRCUIT BREAKER BEFORE BEGINNING.

- Read all instructions before installing.
- System is intended for installation by a licensed electrician in accordance with the National Electrical Code (NEC) and local regulations.
- When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.
- Retain installation instructions for future maintenance reference.


WARNING: All parts must be used as indicated in these instructions. This product is designed for use only with the supplied parts and/or accessories designated for use by WAC Lighting. Substitution of parts or accessories not designated for use with this product by WAC Lighting could result in personal injury or property damage, and will void the warranty. Contact an authorized dealer or the manufacturer if any parts are damaged or missing.

MISE EN GARDE: POUR ÉVITER TOUT CHOC ÉLECTRIQUE, ASSUREZ-VOUS QUE LE DISJONCTEUR SOIT MIS HORS TENSION AVANT DE COMMENCER.

- Lisez toutes les instructions avant l'installation.
- Le système doit être installé par un électricien licencié conformément au code national de l'électricité (NEC), et également aux règlements locaux.
- Lors de la manipulation du luminaire, n'appuyez pas sur les LED. Tenez-le uniquement par la base.

ATTENTION: Toutes les pièces doivent être utilisées comme indiqué dans ces instructions. Ce produit est conçu pour être utilisé seulement avec les pièces et/ou accessoires fournis pour être utilisés avec les produits WAC Lighting. Remplacer des pièces ou accessoires non conçus pour ce produit WAC Lighting pourrait causer des dommages corporels ou matériels et pourrait également causer l'annulation de la garantie. Veuillez contacter un revendeur autorisé ou le fabricant si des pièces manquent ou sont endommagées.

OVERALL FIXTURE DIMENSIONS

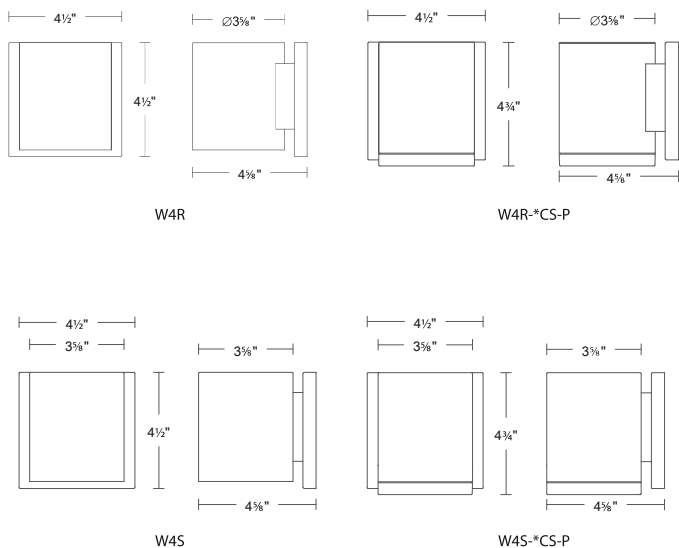

FIXTURE OVERVIEW

Monopoint is intended for direct surface mount installation to an NEC approved junction box.

HARDWARE



Wire Connector
Qty: 3pcs+1 Extra



Mounting Screw
Qty: 2pcs+1 Extra



Rubber Gasket
Qty: 2pcs+1 Extra



Junction Box Screw
Qty: 2pcs+1 Extra

SPECIFICATIONS

Input:	120-277V, 50/60Hz
Installation:	3/0, 4/0 Junction Box
Dimming:	ELV, TRIAC, 0-10V

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 S Archibald Avenue
Ontario, CA 91760



INSTALLATION INSTRUCTIONS

Zoron Ceiling Mount - Trimless J-Box Cover

C4RL, C4SL

WAC


PREPARATION:

1. Shut off the power at the circuit breaker and remove any existing fixture, including its mounting plate.
2. Carefully unpack the new fixture and lay out all the parts in a clear area.

INSTALLATION:

The fixture is supplied with the mounting plate pre-installed and secured by the mounting screws (B).

1. Loosen the mounting screws (B) to remove the mounting back plate from the fixture.
2. Secure the mounting back plate to the junction box using the appropriate junction box screws (D).
3. Connect fixture wires to the corresponding building wires with the included wire connectors (A) according to the table.
4. Select the desired color temperature using the switch located at the rear of the fixture.
5. Place the fixture over the mounting plate. Secure by tightening both mounting screws (B) with gaskets (C).
6. To prevent moisture from entering the outlet box and causing a short, use clear caulking (i.e. indoor/outdoor silicone sealant) to outline the outside of the fixture back plate where it meets the wall when used outdoors. Leave a space at the bottom to allow moisture to escape.

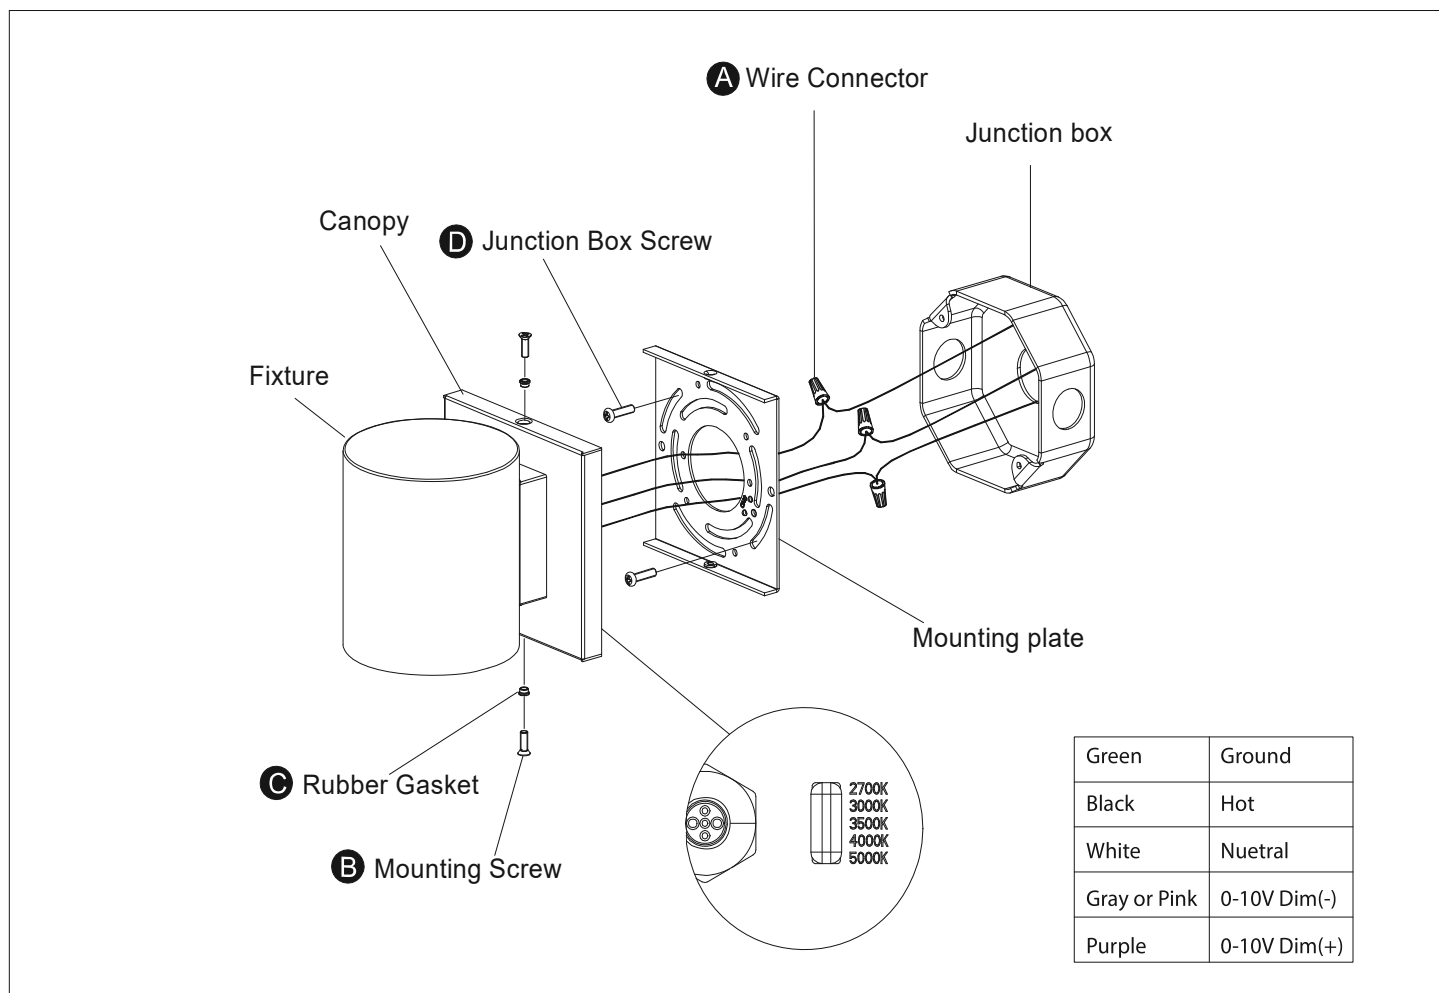

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 S Archibald Avenue
Ontario, CA 91760

