


# GLIDE WOOD - CENTER FEED, 120V/24VAC FIXTURE - 92CRI



MADE IN THE USA

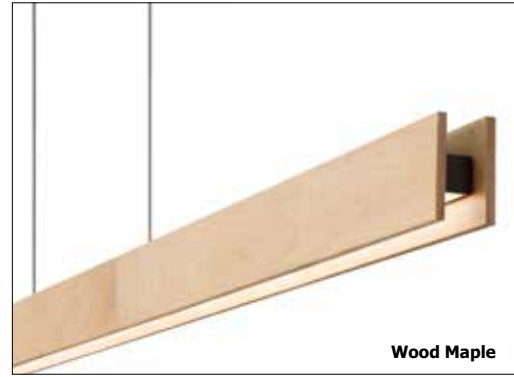


Wood Maple



Wood Walnut






Wood Maple



Wood Walnut



Wood Cherry

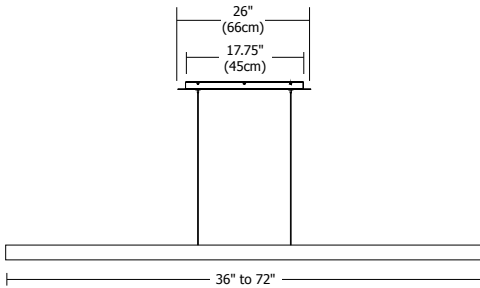

## Description:

The Glide Center Feed features a direct 1" (D1) flat lens with 100 degree beam spread. At 7 watts per foot, the 24 volt AC suspension contains very warm white 2,700K or warm white 3,000K 92CRI LEDs. It is available in lengths from 36 inches up to 72 inches. Custom sizes are also available. The Glide includes 26" rectangle canopy and feeds power at the center from a 24 VAC Class 2 electronic low voltage LED transformer (included), which fits inside a standard 4" electrical box with round plaster ring and is dimmable with an electronic low voltage dimmer. All cables have a Satin Nickel finish. Fixture is covered by a 5 year warranty.

## Wood Finish:

Wood Maple, Wood Walnut, Wood Cherry, Wood White Oak, and Wood Espresso

## Fixture Finish:

Satin Nickel and Bronze

## Applications:

Indoor - Architectural lighting, general lighting and retail

## Lamp:

Version	Watts per Foot	Lumens per Watt	Lumens per Foot	92CRI 27K, 30K	50,000 Hour Lamp Life
Glide D1	7	33	230	●	●

Lumen values are based on the 3000K LED test.

## Power Supply:

120V input, 24VAC Class 2 output; electronic low voltage LED transformer (included) that fits inside standard junction box

## Dimming

Dimmable with electronic low voltage dimmer.

Lutron: Diva #DVELV-300P; Skylark #SELV-300P dimmers recommended

System	Lens	Power Feed	Length in Inches	Color Temperature	Wood Finish	Fixture Finish
<b>GL</b>	<b>D1</b>	<b>C</b>	<b>72IN</b>	<b>27K</b>	<b>WM</b>	<b>SN</b>
GL Glide	D1 Direct 1"	C Center Feed CFJ Center Feed Fast Jack	36 36" 60 60" 48 48" 72 72" Customize in 2.4 inch increments	27K 2,700K Very Warm White 30K 3,000K Warm White	WM Wood Maple WN Wood Walnut WC Wood Cherry WO Wood White Oak WE Wood Espresso	SN Satin Nickel BZ Antique Bronze

PROJECT:

FIXTURE TYPE:

DATE: