


CAMVIEW™

FPS6225BL Ceiling Fan

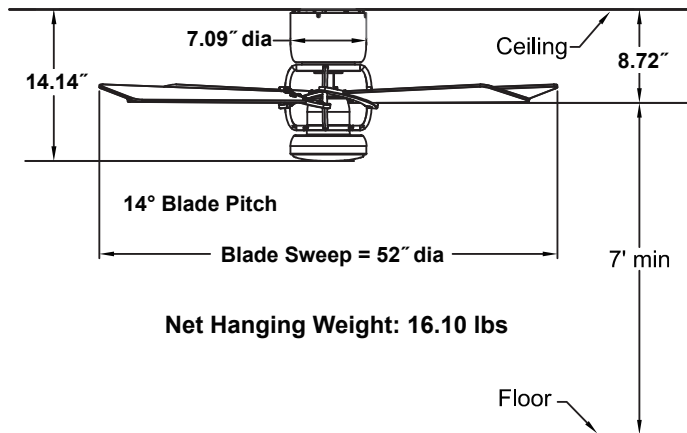

Available Finishes

BL	Black with Black blade and Opal Frosted Glass
----	---

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	177	5983	98	0.52	61
Med	116	4028	134	0.42	30
Low	81	2812	176	0.33	16

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 20 motor is designed for optimal performance with this fan.

BLADE SET:

A set of four 23" black plywood blades is included.

CONTROL OPTIONS:

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CWRL4 and C25 wall controls, CRL4WH and CRL8TS hand-held remote controls are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One bulb (100-watt halogen minican bulb -included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 100 watts.

LOCATION USE:

Fan is rated for dry location only.