


ZONIX™

FP4620** / FP4630SN Ceiling Fan

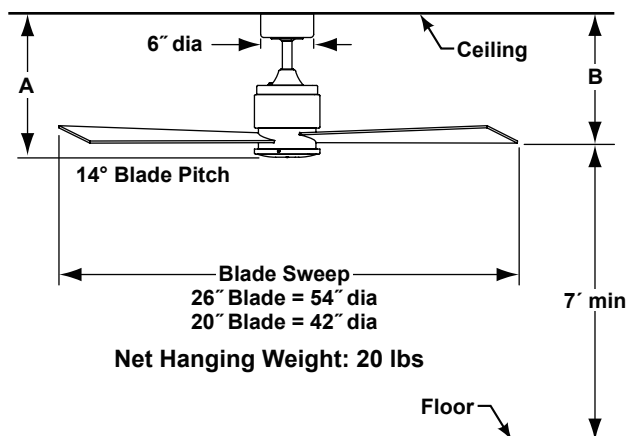

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 18 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

BLADES:

A set of three 26" blades is included; reversible cherry walnut for FP4620** and satin nickel for FP4630SN. Optional sets of three 20" wood blades are available in reversible cherry/walnut (B4442CWR) and satin nickel (B4442SN) finishes—sold separately. Optional a set of three 26" wood blades is available in satin nickel (B4400SN) finish—sold separately. Optional sets of three 20" composite blades are available in cherry (BPW4442CY) and walnut (BPW4442WA) finishes—sold separately.

CONTROL OPTIONS:

CW40 fan-only wall control is included. Reversing switch located on fan housing. Instructions are provided with each control. Optional CW1, CW1SW, CW2, CW5 and CWRL4 wall controls and CRL4WH and CRL8TS remote controls with receiver unit are available—sold separately. Instructions

LIGHTING OPTION:

A single-bulb downlight fixture with 13 watt, energy-efficient CFL bulb included is available—sold separately. Maximum downlight wattage not to exceed 13 watts. *NOTE: Fan supplied with fan only wall control. Light kit will require use of CW1, CW1SW, CW2, CW5 and CWRL4 wall controls and/or CRL4WH and CRL8TS remote controls with receiver unit—sold separately.* Optional lighting fitter and light kits are available. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only, however, is damp location rated if used with composite blades listed above.

	A	B
Fan w/6" downrod	15.40"	12.90"
Fan w/12" downrod	21.40"	18.90"
Fan w/18" downrod	27.40"	24.90"
Fan w/24" downrod	33.40"	30.90"
Fan w/36" downrod	45.40"	42.90"
Fan w/48" downrod	57.40"	54.90"
Fan w/60" downrod	69.40"	66.90"
Fan w/72" downrod	81.40"	78.90"

Available Finishes

OB	Oil-rubbed bronze—reversible cherry/walnut
PN	Polished Nickel—reversible cherry/walnut
SN	Satin nickel—reversible cherry/walnut (FP4620**)
SN	Satin nickel—satin nickel (FP4630SN)
BN	Brushed nickel—reversible cherry/walnut (FP4620**)
BL	Black—black (FP4620**)

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	130	4260	75	0.48	57
H-Med	93	3142	104	0.35	31
L-Med	68	2363	125	0.27	19
Low	40	1262	155	0.17	8