



GENERAL PRODUCT INFORMATION:

Mount to either a 4" square electrical box with round plaster ring or an octagonal electrical box.




Suitable for damp locations.




CAUTION — RISK OF FIRE
 This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **TURN OFF POWER TO THE ELECTRICAL BOX.**


Install the Wall Canopy

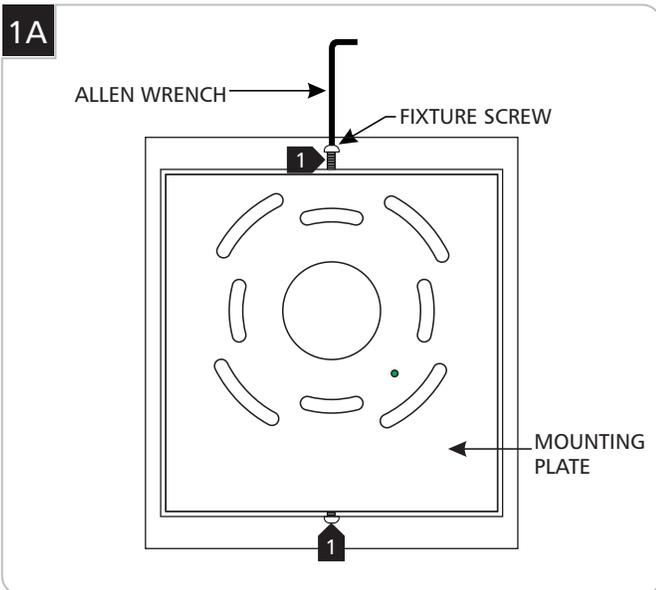

- 1** With the Allen wrench provided, remove the two fixture screws from the top and base of the fixture.
- 2** Remove the mounting plate from the back of the fixture.

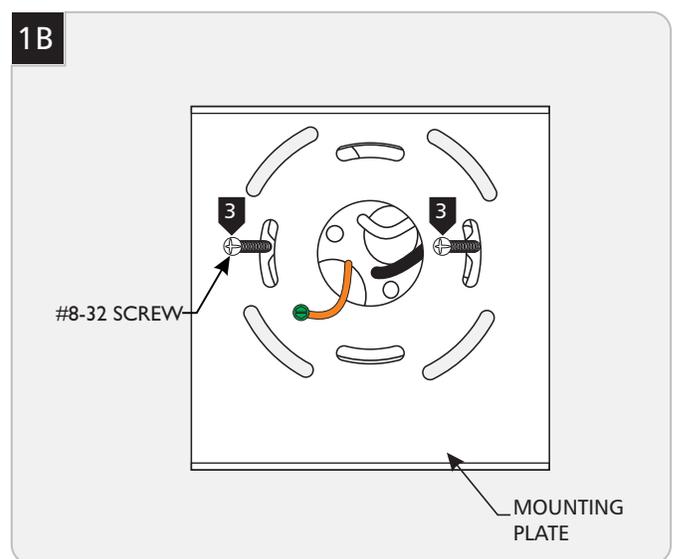


- 3** Secure the mounting plate to the electrical box with the provided #8-32 screws .

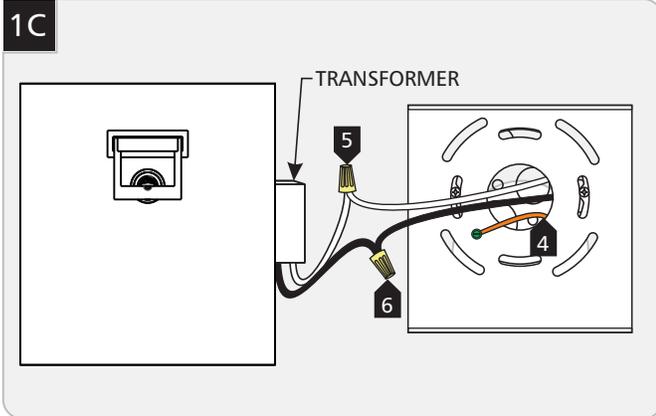

- 4 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 5 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 6 Connect the black fixture wire to the hot power line wire with a wire nut.
- 7 Properly place the transformer, wires, and wire nut connections into the electrical box.
- 8 Mount the fixture by sliding it back onto the mounting plate and reinstalling the two fixture screws (reversal of figure 1A).


Note: Depending on the size of the shade and the desired distance of the shade from the wall, Adjustments of the canopy length can be made using the following section. It is important to plan out the desired height of the pendant along with the desired distance from the wall before shortening the cable.

Adjust the Canopy

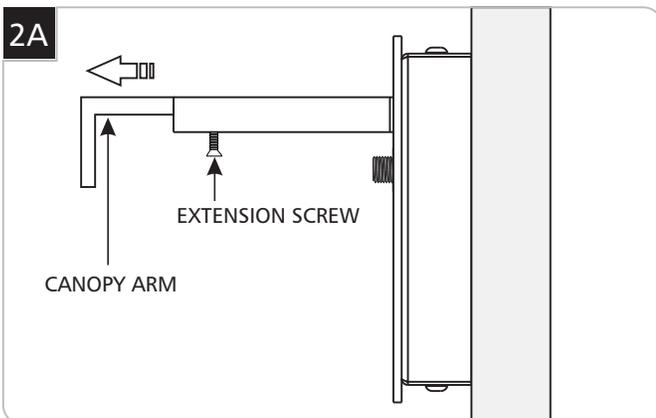

- 1 If needed, adjust the canopy arm's length by loosening the extension screw, pull the arm out to the desired position, and secure it in place by re tightening the screw.

Install the Fixture

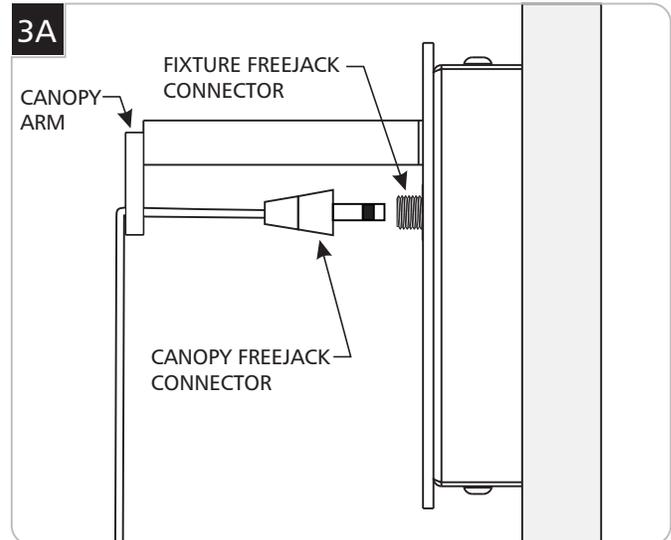

- 1 Follow the instruction provided with the pendant to shorten the cable.
- 2 While securing the pendant with one hand, pass the Freejack male connector through the hole in the canopy arm.

For installations that are not extending the canopy arm:
In order for the Freejack connector to pass through the canopy arm, the canopy arm must be temporarily extended. Follow section 2A to extend the arm, pass the Freejack connector through the canopy arm, and then secure the canopy arm back to the original position.

- 3 Screw the Fixture FreeJack male connector into the FreeJack female connector.



7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.techlighting.com

© 2013 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company