


Specifications/Features

- All trims are compatible with 5 Inch Line Voltage Incandescent Recessed Housings: RL530, RL530-ICSA, RL530-R and RL530-ICSA-R
- All trims have white trim finish unless specified.
- All trims are cULus listed.
- All trims are suitable for damp locations; only shower trims are listed for wet locations.
- Select trims have a unique Two Stage lamp holder assembly.

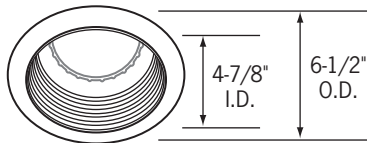

CTR51901-B
Black Baffle, Clear Reflector, Black Trim


CTR51901-P
Black Baffle, Clear Reflector, White Trim

CTR51901-WHT
White Baffle, White Reflector, White Trim

Black or white steel tapered baffle, white sculptured steel trim rings. Specular aluminum reflector. (2) Heat treated steel mounting springs.

Maximum Lamp:

IC Housings: 40W A19, 65W BR30, 75W PAR30
Non-IC Housings: 60W MB19, 65W BR30, 75W PAR30, 75W A19

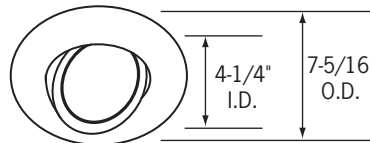


CTR53007-P
Surface Adjustable

All steel construction white gimbal lamp holder with beveled white steel trim ring. 50° Vertical adjustment, 358° horizontal positioning. Special dual arm lamp retaining steel spring. (2) Heat tested steel butterfly spring clips. (2) Heat treated steel mounting springs.

Maximum Lamp:

IC Housings: 50W PAR30
Non-IC Housings: 75W PAR30

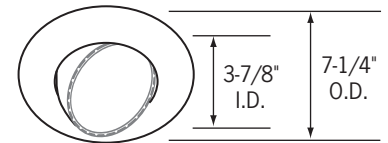


CTR53008-B
Black Eyeball, Black Trim

CTR53008-P
White Eyeball, White Trim

Beveled steel trim ring. 35° Vertical adjustment, 358° horizontal positioning. All steel construction. (2) Heat tested steel butterfly spring clips.

Maximum Lamp:

IC Housings: 75W PAR30
Non-IC Housings: 75W PAR30

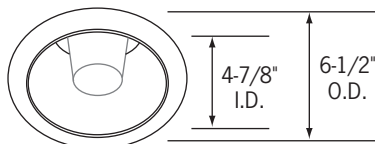


CTR51902-CLR
Multiplier, Clear Reflector

CTR51902-WHT
Multiplier, White Reflector

White or clear specular aluminum reflector with white sculptured steel trim rings. (2) Heat treated steel mounting springs.

Maximum Lamp:

IC Housings: 40W A19, 65W BR30, 75W PAR30
Non-IC Housings: 60W MB19, 65W BR30, 75W PAR30, 75W A19

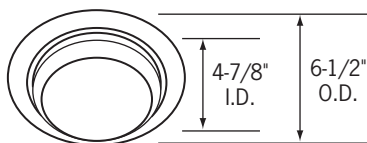

CTR51912-P
Convex Glass Shower Light Trim


Full specular aluminum reflector with sculptured opal drop glass that is removeable without taking down trim. Beveled white steel trim ring. Heavy-duty neoprene gasket. (2) Heat treated steel butterfly spring clips. Wet location listed.

Maximum Lamp:

IC Housings: 40W A19, 50W PAR30
Non-IC Housings: 75W A19

2-Stage Lampholder Assembly

Innovative, exciting design allows simple snap-in lampholder assembly for PAR30 and BR30 lamps in the baffle, multiplier and open trim models. The upper position accommodates the long neck PAR30LN and BR30 lamps. Shifting the porcelain lamp socket to the lower snap-in slots perfectly positions the short neck PAR30 lamps. In either case, the lamp is optimally placed to give maximum light distribution with minimum glare.

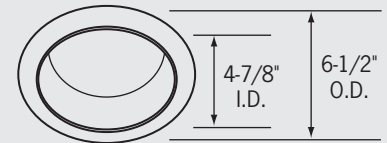

CTR53002-CLR
Multiplier, Clear Specular Reflector, White Trim


CTR53002-WHT
White Multiplier, White Reflector, White Trim

Specular aluminum reflector with 2-stage yolk for short and long neck lamps. Sculptured steel trim ring, steel tapered baffle. (2) Heat treated steel mounting springs.



Maximum Lamp:

IC Housings: 65W BR30, 75W PAR30
Non-IC Housings: 65W BR30, 75W PAR30

Upper Lamp Socket Position

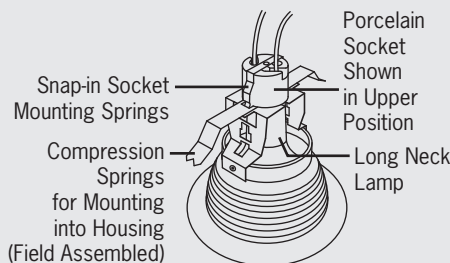

Lower Lamp Socket Position

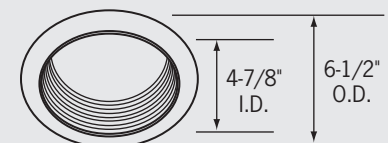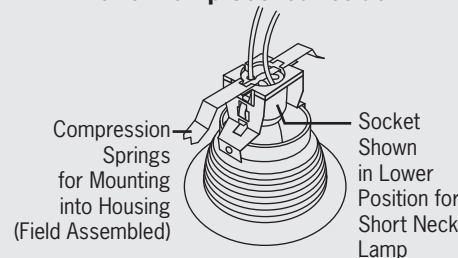

CTR53001-B
Black Baffle, Black Trim

CTR53001-P
Black Baffle, White Trim

CTR53001-WHT
White Baffle, White Trim

Baffle trim with 2-stage yolk for short and long neck PAR30 and BR30 lamps. Sculptured steel trim ring, steel tapered baffle. (2) Heat treated steel mounting springs.

Maximum Wattage:

IC Housings: 65W BR30, 75W PAR30
Non-IC Housings: 65W BR30, 75W PAR30