



**Description:**

LED power supplies transform and regulate power from a line voltage power source into low voltage power for use with LED lighting. The PSB-25W-010-24VDC power supply accepts input voltage from 120 volts AC and outputs 24 volts DC power up to 25 watts. The power supply can be used as a dimmable or non-dim power supply. The low voltage output of this power supply dims down to 7% when two additional wires are connected to a 0-10V dimmer. The black plastic enclosure provides space inside for electrical connections.

**Applications:**

Indoor

**Power Input:**

120 volts AC, 50/60Hz

**Power Output:**


24 volts DC 1A, 25 watts maximum

**Dimensions:**

10" x 6" x 3"

**Dimmer Type:**

Dimmable with Philips Sunrise SR1200ZTUNV, 0-10V dimmer. See fixture spec sheet or dimming chart for additional details.

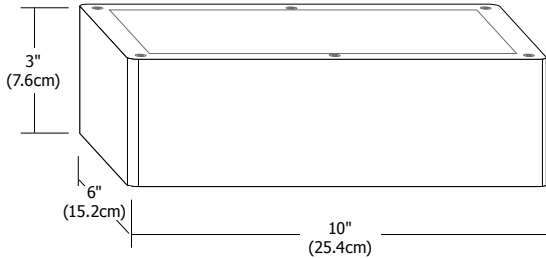

Product	Wattage	Dimming	Voltage
<b>PSB</b>	<b>25W</b>	<b>010</b>	<b>24VDC</b>
<small>PSB Power Supply with Enclosure Box</small>	<small>25W 25 Watt</small>	<small>010 0-10 Volt Dimming</small>	<small>24VDC 24 Volt DC</small>

PROJECT: \_\_\_\_\_ FIXTURE TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_