

**Description:** LED power supplies transform and regulate power from a line voltage power source into low voltage power for use with LED lighting. The PSB-60W-ELV-24VDC power supply accepts input voltage in range of 120 volts AC and outputs 24 volts DC power up to 60 watts. The power supply can be used as a dimmable or non-dim power supply.

**Applications:** Indoor

**Power Input:** 120 volts AC, 50/60Hz

**Power Output:** 24 volts DC 2.5A, 60 watts maximum

**Dimensions:** 7.8" x 1.4" x 3.3"


**Compatible Dimmers:**

Legrand: Adorne ADTH700RMTU

Lutron: DIVA DVELV-300P, Skylark SELV-300P and Maestro MAELV-600.

### 60W POWER SUPPLY ORDERING CODE

Product	Wattage	Dimming	Voltage
<b>PSB</b>	<b>60W</b>	<b>ELV</b>	<b>24VDC</b>
<small>PSB - Power Supply with Enclosure Box</small>	<small>60W - 60 Watt</small>	<small>ELV Electronic Low Voltage Dimming</small>	<small>24VDC - 24 Volt DC</small>

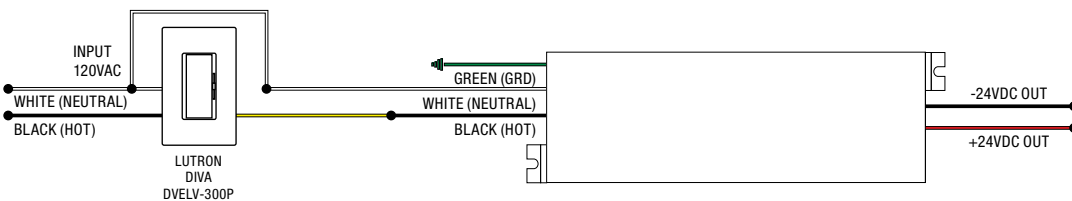

COMPANY		FIXTURE TYPE		DATE	
PROJECT		APPROVED BY			

Product specification subject to change without notification. REV. 06.02.14