

**Description:**

Cirrus Channel Wall Grazer features a lens that provides dramatic accent lighting to highlight textured surfaces. At 7 watts per foot, the 24 volt DC channel contains 85+ or 95+CRI LEDs. Includes a split canopy that mounts on standard junction box. May be ordered with a Slim Profile Channel Junction Box (C-1RE-JBOX). Mounting clips are provided every 18 inches. Cirrus is powered by a Class 2 remote power supply up to 40 feet away. Available from 12 inches to 144 inches/12 feet. May be ordered in 3, 5, 8 or 10 inch increments. Lengths greater than 120 inches will ship as two or more segments that join together. Fixtures include a 5 year warranty.

**Finishes:**

Satin Nickel, Chrome, Antique Bronze, Satin Aluminum, White and Satin Black; Custom finishes available

**Applications:**

Wall grazing for textured surfaces such as architectural wall panels, hallways, brick, and stone or wood treatments

**Lamp:**

Version	Watts per Foot	Lumens per Watt	per Foot	85+CRI 24K, 35K, 40K, 57K	95+CRI 27K, 30K	50,000 Hour Lamp Life
<b>7WDC 27K</b>	7	63	442	●	●	●
<b>7WDC 30K</b>	7	66	463	●	●	●

**24VDC Power Supply (sold separately):**





- PSB-25W-010-24VDC** 120VAC input, 25 watt output
- PSB-96W-010-24VDC** 120-277VAC input, 96 watt output
- PSB-2X96W-010-24VDC** 120-277VAC input, 2x96 watt output
- PSB-3X96W-010-24VDC** 120-277VAC input, 3x96 watt output
- PSB-4X96W-010-24VDC** 120-277VAC input, 4x96 watt output
- PS-40W-ELV-24VDC** 120VAC input, 40 watt output
- PSB-60W-ELV-24VDC** 120VAC input, 60 watt output
- PSB-100W-ELV-24VDC** 120VAC input, 96 watt output
- PSB-2X100W-ELV-24VDC** 120VAC input, 2x96 watt output
- PSB-3X100W-ELV-24VDC** 120VAC input, 3x96 watt output
- PSB-4X100W-ELV-24VDC** 120VAC input, 4x96 watt output

**Slim-Profile Junction Box (sold separately):**

The Slim-Profile Junction Box with hanger bars mounts to studs spaced between 14.5"- 25" apart behind drywall. Allows low voltage DC wires from remote power supply to connect to channel wires. Junction box opening is covered by the fixture for a clean, safe connection. Includes a goof plate, for poor plastering around j-box, which may be plastered and painted.

**Dimming:**

010 power supplies use 0-10V dimmer: Philips Sunrise SR1200ZTUNV. ELV power supplies use ELV dimmer: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

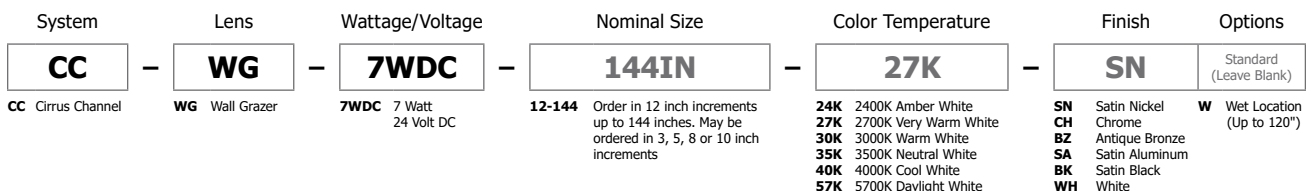

PROJECT:


FIXTURE TYPE:

DATE:




# CIRRUS CHANNEL WALL GRAZER 24VDC SYSTEM, 85+ OR 95+CRI

REV.11.01.16

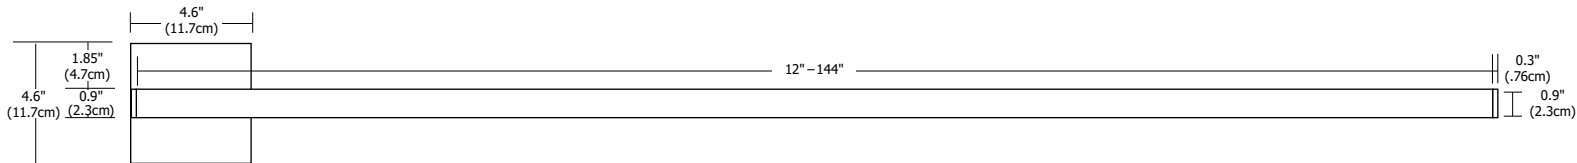

Split Canopy (included) with Cirrus Channel. May be mounted at End.



Shown with C-1RE-JBOX (sold separately)



Satin Aluminum Anodized



Satin Nickel Anodized



Antique Bronze Anodized



Satin Black Anodized



Chrome Plated




White Powder Coated



**Application:** 0-10V dimming for Cirrus Channel Wall Grazer

**Power Supply:** Class 2, 24VDC output: 120VAC input, PSB-25W-010-24VDC; 120-277VAC input, PSB-96W-010-24VDC; PSB-2X96W-010-24VDC

**Dimming:** Dimmable with 0-10V dimmer: Philips Sunrise SR1200ZTUNV, 0-10V dimmer recommended

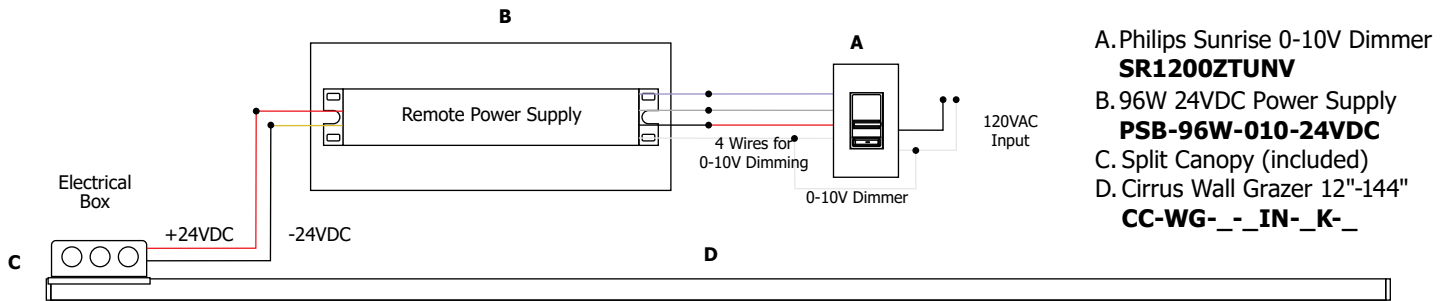

Warm White (4ft) with 10° Clear Grazing Lens	
Distance	Foot Candles
12in	742
24in	319
36in	179
48in	114

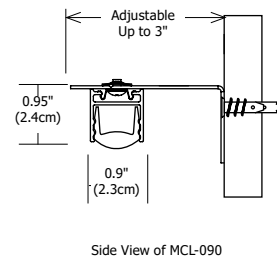

PROJECT:

FIXTURE TYPE:

DATE:



# CHANNEL L-SHIELD FOR CIRRUS WALL WASH AND WALL GRAZER



REV.11.01.16



## Description:

The Channel L-Shield mounts to the ceiling along the Cirrus Wall Wash or Cirrus Wall Grazer fixtures (with C-1RE-JBOX only) to shield light brightness from view.

System	Product	Length	Finish
<b>C</b>	<b>L2.5</b>	<b>10FT</b>	<b>WH</b>
C Channel	L2.5 L- Shield 2.5" Height	10FT 10 Feet	WH White

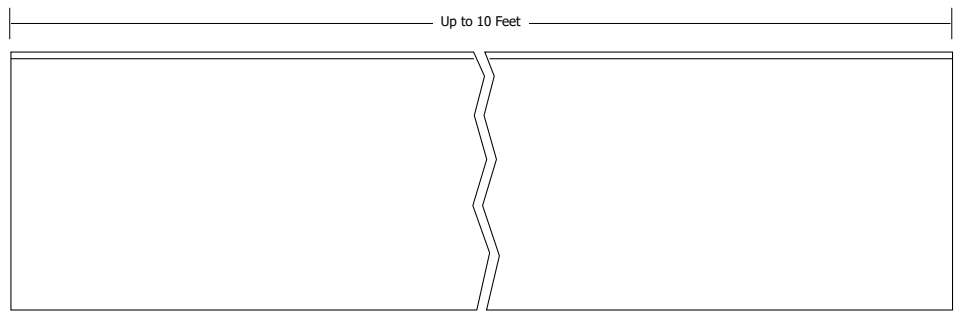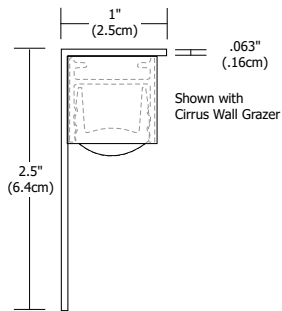

PROJECT:

FIXTURE  
TYPE:

DATE:

**EDGE**  
LIGHTING

**CIRRUS CHANNEL WALL GRAZER ACTUAL SIZE**

<b>ORDERING CODE (NOMINAL SIZE)</b>	<b>LENGTH (INCHES)</b>
12IN	13.1
15IN	15.5
17IN	17.9
20IN	20.3
22IN	22.7
24IN	25.1
27IN	27.5
29IN	29.9
32IN	32.3
34IN	34.7
36IN	37.1
39IN	39.5
41IN	41.9
44IN	44.3
46IN	46.7
48IN	49.1
51IN	51.5
53IN	53.9
56IN	56.3
58IN	58.7
60IN	61.1
63IN	63.5
65IN	65.9
68IN	68.3
70IN	70.7
72IN	73.1
75IN	75.5
77IN	77.9

<b>ORDERING CODE (NOMINAL SIZE)</b>	<b>LENGTH (INCHES)</b>
80IN	80.3
82IN	82.7
84IN	85.1
87IN	87.5
89IN	89.9
92IN	92.3
94IN	94.7
96IN	97.1
99IN	99.5
101IN	101.9
104IN	104.3
106IN	106.7
108IN	109.1
111IN	111.5
113IN	113.9
116IN	116.3
118IN	118.7
120IN	121.1
123IN	123.8
125IN	126.2
128IN	128.6
130IN	131
132IN	133.4
135IN	135.8
137IN	138.2
140IN	140.6
142IN	143
144IN	145.4

PROJECT:

FIXTURE  
TYPE:

DATE:

