

Description:

Cirrus Channel Wall Grazer features a lens that provides dramatic accent lighting to highlight textured surfaces. At 7 watts per foot, the 24 volt DC channel contains 85+ or 95+CRI LEDs. Includes a split canopy that mounts on standard junction box. May be ordered with a Slim Profile Channel Junction Box (C-1RE-JBOX). Mounting clips are provided every 18 inches. Cirrus is powered by a Class 2 remote power supply up to 40 feet away. Available from 12 inches to 144 inches/12 feet. May be ordered in 3, 5, 8 or 10 inch increments. Lengths greater than 120 inches will ship as two or more segments that join together. Fixtures include a 5 year warranty.

Finishes:

Satin Nickel, Chrome, Antique Bronze, Satin Aluminum, White and Satin Black; Custom finishes available

Applications:

Wall grazing for textured surfaces such as architectural wall panels, hallways, brick, stone or wood treatments, wet location IP53

Lamp:

Version	Watts per Foot	Lumens		85+CRI 24K, 35K, 40K, 57K	95+CRI 27K, 30K	50,000 Hour Lamp Life
		per Watt	per Foot			
7WDC 27K	7	63	442	●	●	●
7WDC 30K	7	66	463	●	●	●

Power Supply (24VDC):





- PSB-25W-010-24VDC** 120VAC input, 25 watt output
- PSB-60W-ELV-24VDC** 120VAC input, 60 watt output
- PSB-96W-010-24VDC** 120-277VAC input, 96 watt output
- PSB-100W-ELV-24VDC** 120VAC input, 96 watt output
- PSB-2X96W-010-24VDC** 120-277VAC input, 2x96 watt output
- PSB-2X100W-ELV-24VDC** 120VAC input, 2x96 watt output

Slim-Profile Junction Box (sold separately):

The Slim-Profile Junction Box with hanger bars mounts to studs spaced between 14.5"- 25" apart behind drywall. Allows low voltage DC wires from remote power supply to connect to channel wires. Junction box opening is covered by the fixture for a clean, safe connection. Includes a goof plate, for poor plastering around j-box, which may be plastered and painted.


Dimming:

010 power supplies use 0-10V dimmer: Philips Sunrise SR1200ZTUNV. ELV power supplies use ELV dimmer: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

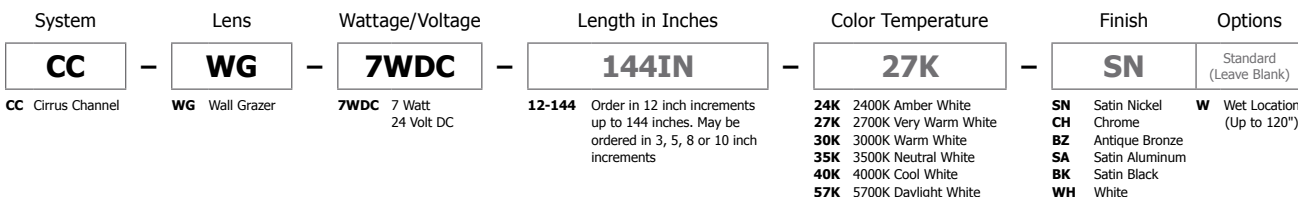


CIRRUS CHANNEL WALL GRAZER 24VDC SYSTEM, 85+ OR 95+CRI

REV05.15.15

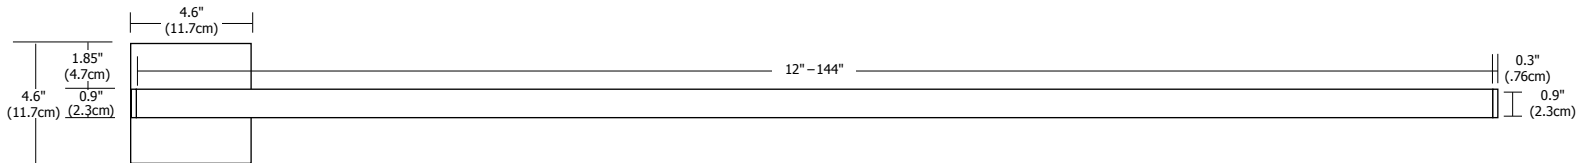

Split Canopy (included) with Cirrus Channel. May be mounted at End.



Shown with C-1RE-JBOX (sold separately)



Satin Aluminum Anodized



Satin Nickel Anodized



Antique Bronze Anodized



Satin Black Anodized



Chrome Plated




White Powder Coated



Application: 0-10V dimming for Cirrus Channel Wall Grazer

Power Supply: Class 2, 24VDC output: 120VAC input, PSB-25W-010-24VDC; 120-277VAC input, PSB-96W-010-24VDC; PSB-2X96W-010-24VDC

Dimming: Dimmable with 0-10V dimmer: Philips Sunrise SR1200ZTUNV, 0-10V dimmer recommended

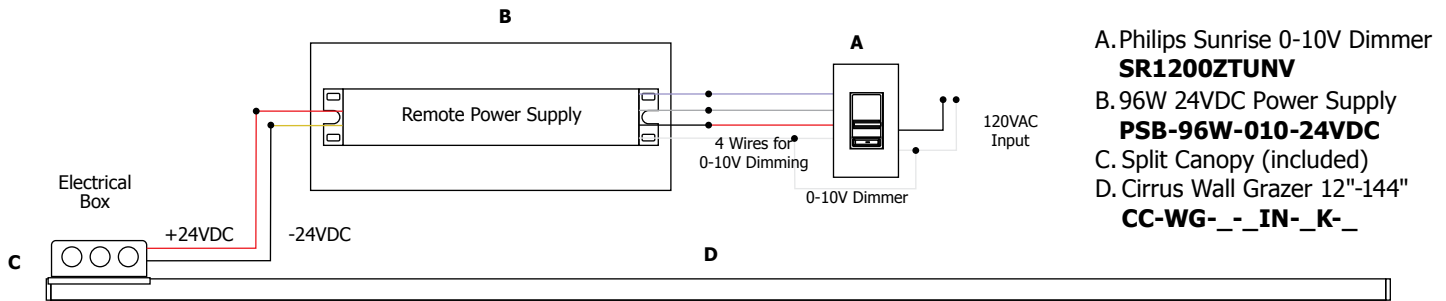

Warm White (4ft) with 10° Clear Grazing Lens	
Distance	Foot Candles
12in	742
24in	319
36in	179
48in	114



PROJECT:





FIXTURE TYPE:

DATE:



SLIM-PROFILE JUNCTION BOX

REV04.28.15

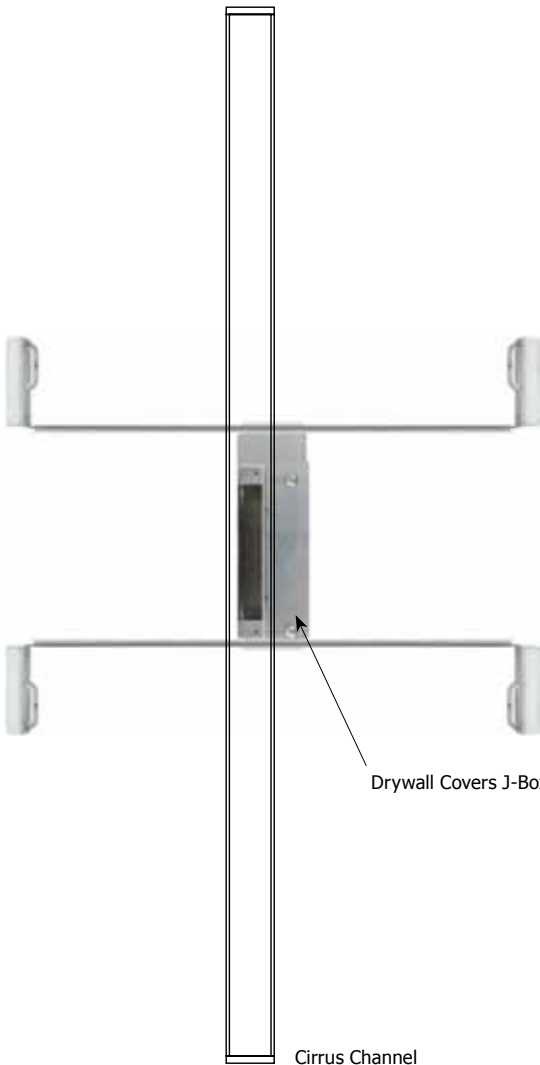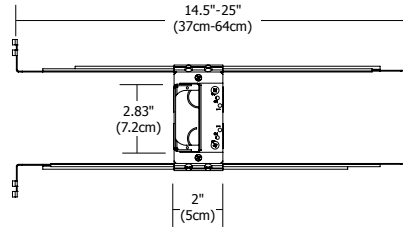

Description:

The Slim-Profile Junction Box with hanger bars mounts to studs spaced between 14.5"- 25" apart behind drywall. Allows low voltage DC wires from remote power supply to connect to channel wires. The junction box opening is covered by the fixture for a clean, safe connection. Includes a goof plate, for poor plastering around j-box, which may be plastered and painted.

System	Size	Product
C	1RE	JBOX
C Channel	1RE 1" Rectangle	JBOX Junction Box

PROJECT:

FIXTURE
TYPE:

DATE:

CHANNEL L-SHIELD FOR CIRRUS WALL WASH AND WALL GRAZER



REV.05.01.15



Description:

The Channel L-Shield mounts to the ceiling along the Cirrus Wall Wash or Cirrus Wall Grazer fixtures (with C-1RE-JBOX only) to shield light brightness from view.

System	Product	Length	Finish
C	L2.5	8FT	WH
C Channel	L2.5 L- Shield 2.5" Height	8FT 8 Feet	WH White

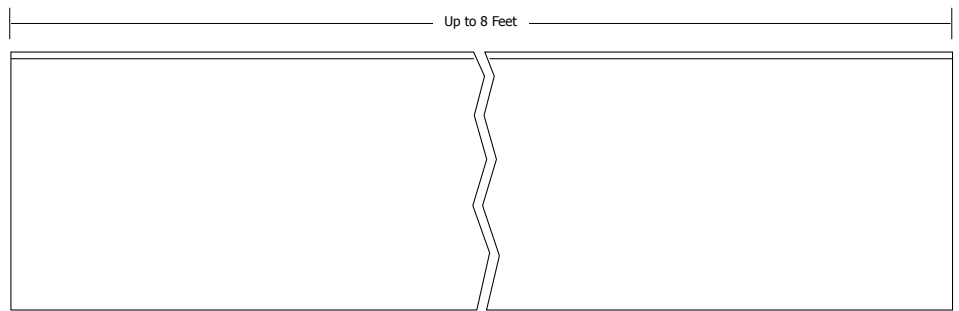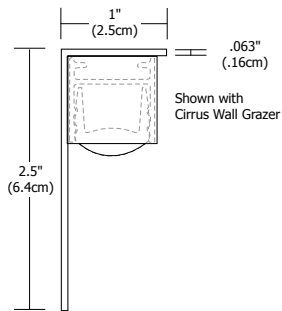

PROJECT:

FIXTURE
TYPE:

DATE:



Please refer to chart below for exact lengths of the Cirrus Channel Wall Grazer

CODE	LENGTH (INCHES)	CODE	LENGTH (INCHES)
12IN	13.1	80IN	80.3
15IN	15.5	82IN	82.7
17IN	17.9	84IN	85.1
20IN	20.3	87IN	87.5
22IN	22.7	89IN	89.9
24IN	25.1	92IN	92.3
27IN	27.5	94IN	94.7
29IN	29.9	96IN	97.1
32IN	32.3	99IN	99.5
34IN	34.7	101IN	101.9
36IN	37.1	104IN	104.3
39IN	39.5	106IN	106.7
41IN	41.9	108IN	109.1
44IN	44.3	111IN	111.5
46IN	46.7	113IN	113.9
48IN	49.1	116IN	116.3
51IN	51.5	118IN	118.7
53IN	53.9	120IN	121.1
56IN	56.3	123IN	123.8
58IN	58.7	125IN	126.2
60IN	61.1	128IN	128.6
63IN	63.5	130IN	131
65IN	65.9	132IN	133.4
68IN	68.3	135IN	135.8
70IN	70.7	137IN	138.2
72IN	73.1	140IN	140.6
75IN	75.5	142IN	143
77IN	77.9	144IN	145.4

PROJECT:

FIXTURE
TYPE:

DATE:

