


SS3 BBB SOFT STRIP 2.6W, 24VDC HIGH OUTPUT, BLUE ONLY

REV.11.15.16

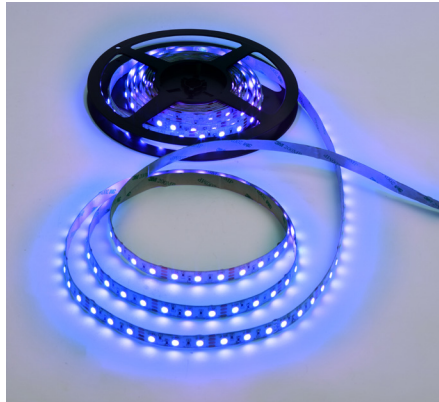

SS3-24V_-BBB

**Maximum Length
Before Refeeding: 36 Feet**

LENGTH IN FEET	TOTAL WATTAGE	LENGTH IN FEET	TOTAL WATTAGE
1	3W	19	50W
2	6W	20	52W
3	8W	21	55W
4	11W	22	58W
5	13W	23	60W
6	16W	24	63W
7	19W	25	65W
8	21W	26	68W
9	24W	27	71W
10	26W	28	73W
11	29W	29	76W
12	32W	30	78W
13	34W	31	81W
14	37W	32	84W
15	39W	33	86W
16	42W	34	89W
17	45W	35	91W
18	47W	36	94W

Description:

Soft Strip (SS3) BBB provides dynamic color effects with blue LEDs. The 1/2" wide flexible copper strip, with an optically clear protective coating, is sold in 1 ft increments up to 36 ft with cutting increments every 4 inches. Includes Snap & Light Connector SS-SLC-96IN. Additional Snap & Light Connectors (pages 3-5) are also available for making custom configurations. At only 2.6 watts per foot, this system uses an electronic low-voltage or 0-10V power supply (sold separately). Self-adhering SS3 mounts to most smooth finished surfaces with the industrial strength 3M tape (provided on back of strip); some unfinished surfaces may require screw-in mounting clips (sold separately). Designed for indoor, open-air environments, SS3 includes a flexible aluminum heat sink to extend LED life. Soft Strip is compatible with solderless Snap & Light Connectors. Fixtures include 5 year warranty.

Applications:

Indoor Only - Under/above cabinet, cove lighting or accent toe kicks, behind sheer curtains, step, entertainment, display, night clubs, molding accent, media room

Lamp:

18 Blue LEDs per foot
LED lamps consume 2.6 watts per foot

Average Lamp Life:

50,000 hours

24VDC Power Supply (sold separately):

- PSB-96W-010-24VDC** 120-277VAC input, 96 watt output
- PSB-2X96W-010-24VDC** 120-277VAC input, 2x96 watt output
- PSB-3X96W-010-24VDC** 120-277VAC input, 3x96 watt output
- PSB-4X96W-010-24VDC** 120-277VAC input, 4x96 watt output
- PSB-60W-ELV-24VDC** 120VAC input, 60 watt output
- PSB-100W-ELV-24VDC** 120VAC input, 96 watt output
- PSB-2X100W-ELV-24VDC** 120VAC input, 2x96 watt output
- PSB-3X100W-ELV-24VDC** 120VAC input, 3x96 watt output
- PSB-4x100W-ELV-24VDC** 120VAC input, 4x96 watt output

Mounting Straps & Clips: (see page 4)

SS-SU


Use U-Strap every 6 to 12 inches for extra support (30 per package).

SS-ST

Use Tie Strap every 6 to 12 inches for extra support (30 per package).

SS-MCL


Screw In Mounting Clip mounts beneath strip, snapping the Strip into place for additional support (10 per package).




System	Voltage	Length in Feet	Color Temperature
SS3	24V	36	BBB
<small>SS3 Soft Strip 2.6W per Ft</small>	<small>24V 24 Volt</small>	<small>Sold in 1 ft increments up to 36 ft (Example 36=36')</small>	<small>BBB Blue, Blue, & Blue</small>



- Application:** 0-10V dimming for SS3 BBB Soft Strip
- Power Supply:** Class 2, 24VDC output: 120-277VAC input, 96 watt output PSB-96W-010-24VDC
- Dimming:** Dimmable with 0-10V dimmer using power supply above. See power supply spec sheet for additional details. Philips Sunrise SR1200ZTUNV, 0-10V dimmer recommended.

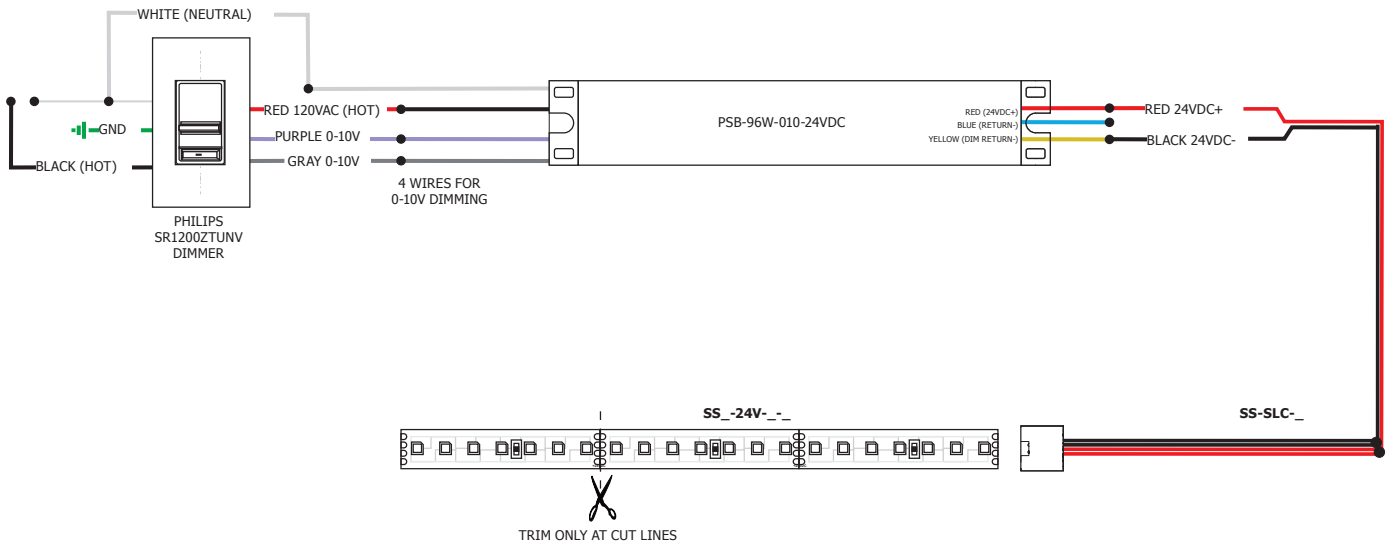


STRIP **DOES NOT** BEND 90°

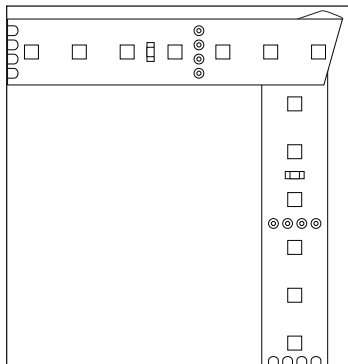



MOUNTING STRIPS

REV.11.15.16

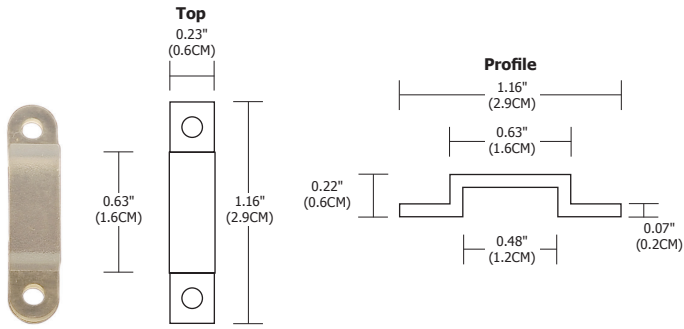



Soft Strip U Strap

Use U-Strap every 6 to 12 inches for extra support (30 per package).

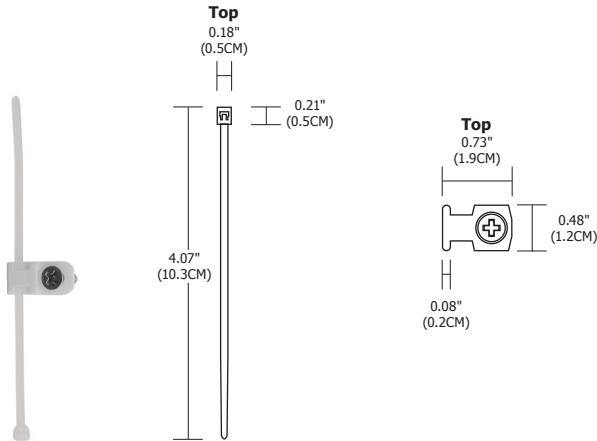


Soft Strip Tie Strap

Use Tie Strap every 6 to 12 inches for extra support (30 per package).

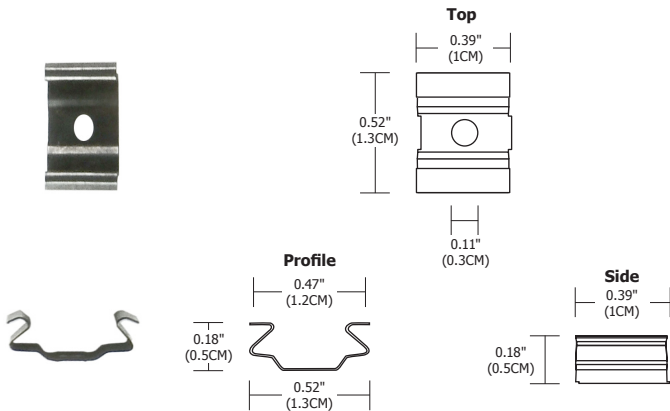

Soft Strip Mounting Clip

Screw In Mounting Clip mounts beneath strip, snapping the Strip into place for additional support (10 per package).



PROJECT:

FIXTURE
TYPE:

DATE:

