
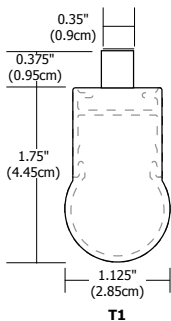
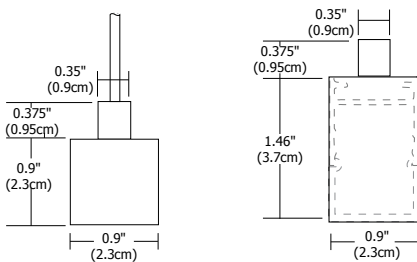
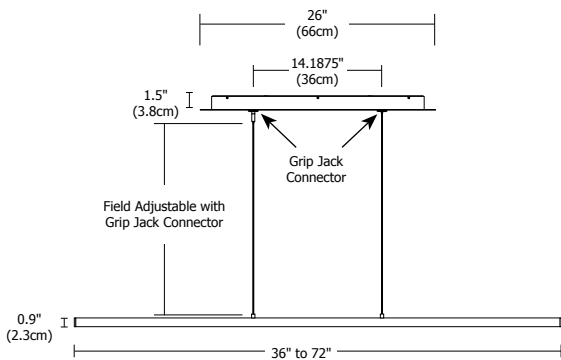


CIRRUS FLOAT - CENTER FEED, 120V/24VAC FIXTURE - 85+ OR 92+ CRI

MADE IN THE USA

REV.03.07.16

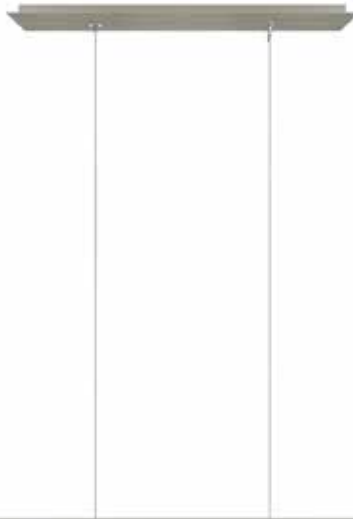

Description:

Cirrus Float Center Feed features a direct 1" (D1), rectangular 1" (R1) or a tubular 1 1/8" (T1) lens, offering an array of choices for style, functionality and beam distribution. At 7 watts per foot, the 24VAC suspension contains white high CRI LEDs and is available in lengths from 36" up to 72". Customized lengths available in 2.4" increments. Cirrus Float includes 26" rectangle canopy and feeds power at the center from a 24VAC Class 2 electronic low voltage LED transformer (included), which fits inside a standard 4" electrical box with round plaster ring and is dimmable with an electronic low voltage dimmer. Hardware and supporting cables are Antique Bronze for Antique Bronze and Black fixtures and are Satin Nickel for all other finishes. Power cables are Satin Nickel for all finish options. Fixture is covered by a 5 year warranty.

Finish:

Satin Aluminum, Satin Nickel, Chrome, Antique Bronze, White and Black; Custom finishes also available.

Applications:

Indoor - Architectural lighting, general lighting and retail.

Lamp:

| Version | Watts per Foot | Lumens per Watt | Lumens per Foot | 92+CRI 27K, 30K | 85+CRI 24K, 35K, 40K, 57K | 50,000 Hour Lamp Life |
|---------|----------------|-----------------|-----------------|-----------------|---------------------------|-----------------------|
| D1 | 7 | 34 | 241 | ● | ● | ● |
| R1 | 7 | 36 | 262 | ● | ● | ● |
| T1 | 7 | 36 | 268 | ● | ● | ● |

Lumen values are based on the 3000K LED test.

Power Supply:

120V input, 24VAC Class 2 output; electronic low voltage LED transformer (included) that fits inside standard junction box

Dimming

Dimmable with electronic low voltage dimmer. Lutron: Diva #DVELV-300P; Skylark #SELV-300P dimmers recommended

| System | Lens | Power Feed | Length in Inches | Color Temperature | Finish |
|-----------------|--|---------------|--|---|--|
| CF | D1 | C | 72IN | 27K | SA |
| CF Cirrus Float | D1 Direct 1" T1 Tubular 1" R1 Rectangular 1" | C Center Feed | 36 36" 60 60" 48 48" 72 72" Customize in 2.4 inch increments | 24K 2400K Amber White 27K 2700K Very Warm White 30K 3000K Warm White 35K 3500K Neutral White 40K 4000K Cool White 57K 5700K Daylight White | SA Satin Aluminum SN Satin Nickel CH Chrome BZ Antique Bronze BK Black WH White |

PROJECT:

FIXTURE TYPE:

DATE:

