



# CIRRUS FLOAT - CENTER FEED, 120V/24VAC FIXTURE - 85+ OR 92+ CRI

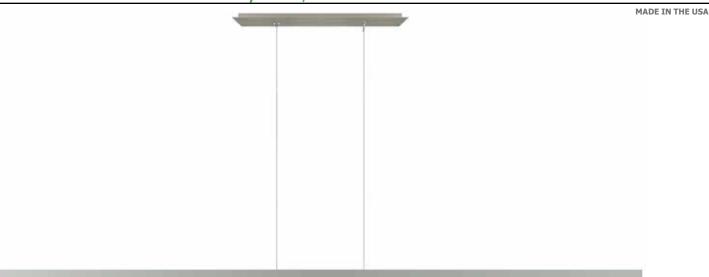







# **Description:**

Cirrus Float Center Feed features a direct (D1), rectangular (R1) or a tubular (T1) lens, offering an array of choices for style, functionality and beam distribution. At 7 watts per foot, the 24VAC suspension contains white high CRI LEDs and is available in lengths from 36" up to 72". Customized lengths available in 2.4" increments. See chart on page 2 for exact lengths. Cirrus Float includes 26" rectangle canopy and feeds power at the center from a 24VAC Class 2 electronic low voltage LED transformer (included), which fits inside a standard 4" electrical box with round plaster ring and is dimmable with an electronic low voltage dimmer. It features adjustable (up to 12 feet) cables. Hardware and supporting cables are Antique Bronze for Antique Bronze and Black fixtures and are Satin Nickel for all other finishes. Power cables are Satin Nickel for all finish options. Fixture is covered by a 5 year warranty.

## Finish:

Satin Aluminum, Satin Nickel, Chrome, Antique Bronze, White and Black; Custom finishes also available.

# **Applications:**

Indoor - Architectural lighting, general lighting and retail.

#### Lamp:

Version	Watts	Lumens		92+CRI	85+CRI	50,000 Hour
	per Foot	per Watt	per Foot	27K, 30K	24K, 35K, 40K, 57K	Lamp Life
D1	7	34	241	•	•	•
R1	7	36	262	•	•	•
T1	7	36	268	•	•	•

Lumen values are based on the 3000K LED test.

### **Power Supply:**

120V input, 24VAC Class 2 output; electronic low voltage LED transformer (included) that fits inside standard junction box

# Dimming

Dimmable with electronic low voltage dimmer. Lutron: Diva #DVELV-300P; Skylark #SELV-300P dimmers recommended



1718 W. Fullerton Ave. Chicago, IL 60614

www.edgelighting.com

A Division of PureEdge Lighting

# Please refer to chart below for exact lengths Cirrus Float - Center Feed

ORDERING CODE	LENGTH (INCHES)
36	37.1
48	49.1
60	61.1
72	73.1

PROJECT:

FIXTURE TYPE:

