



Description:

Cirrus Float End Feed features a direct (D1), rectangular (R1) or a tubular (T1) lens, offering an array of choices for style, functionality and beam distribution. It features adjustable aircraft cables for mounting at any ceiling angle up to 45 degrees. At 7 watts per foot, the 24VAC suspension contains high CRI white LEDs and is available in lengths from 36" up to 72". Customized lengths available in 2.4" increments. The Cirrus Float includes square canopy and feeds power at the end from a 24VAC Class 2 electronic low voltage LED transformer (included), which fits inside a standard 4" electrical box with round plaster ring and is dimmable with an electronic low voltage dimmer. Swag Hook is also available to extend the cable to an electrical box that is not located directly above desired fixture location. Hardware and supporting cables are Antique Bronze for Antique Bronze and Black fixtures and are Satin Nickel for all other finishes. Power cables are Satin Nickel for all finish options. Fixture is covered by a 5 year warranty.

Finish:

Satin Aluminum, Satin Nickel, Chrome, Antique Bronze, White and Black; Custom finishes also available.

Applications:

Indoor - Architectural lighting, general lighting and retail

Lamp:

Version	Watts per Foot	Lumens		92+ CRI 27K, 30K	85+ CRI 24K, 35K, 40K, 57K	50,000 Hour Lamp Life
		per Watt	per Foot			
D1	7	34	241	●	●	●
R1	7	36	262	●	●	●
T1	7	36	268	●	●	●

Lumen values are based on the 3000K LED test.

Power Supply:




120V input, 24VAC Class 2 output; electronic low voltage LED transformer (included) that fits inside standard junction box

Dimming

Dimmable with electronic low voltage dimmer. Lutron: Diva #DVELV-300P; Skylark #SELV-300P dimmers recommended

Channel Suspension Swag Hook (sold separately):

Swag Hook, CS-SWAG, extends a cable to an electrical box that is not located directly above desired fixture location.

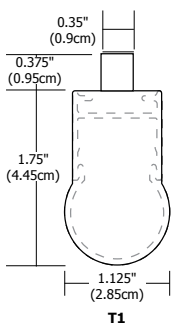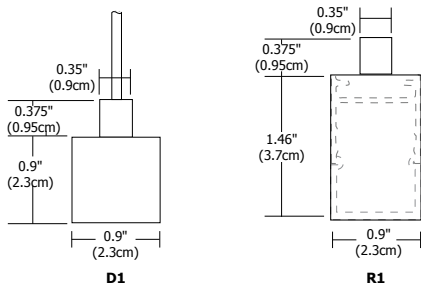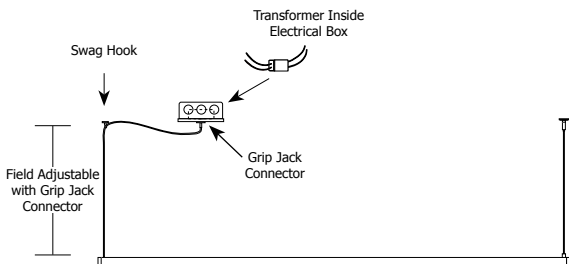

System	Lens	Power Feed	Length in Inches	Color Temperature	Finish
CF	D1	E	72IN	27K	SA
CF Cirrus Float	D1 Direct 0.9" Lens R1 Rectangular 0.9" Lens T1 Tubular 1.125" Lens	E End Feed	36 36" 60 60" 48 48" 72 72" Customize in 2.4 inch increments	24K 2400K Amber White 27K 2700K Very Warm White 30K 3000K Warm White 35K 3500K Neutral White 40K 4000K Cool White 57K 5700K Daylight White	SA Satin Aluminum BZ Antique Bronze SN Satin Nickel BK Black CH Chrome WH White

PROJECT:

FIXTURE TYPE:

DATE:

