

# CIRRUS FLOAT - END FEED, 120V/24VAC FIXTURE - 85+ OR 92+ CRI




REV.09.09.16

MADE IN THE USA



## Description:

Cirrus Float End Feed features a direct (D1), rectangular (R1) or a tubular (T1) lens, offering an array of choices for style, functionality and beam distribution. At 7 watts per foot, the 24VAC suspension contains high CRI white LEDs and is available in lengths from 36" up to 72". Customized lengths available in 2.4" increments. See chart on page 2 for exact lengths. The Cirrus Float includes square canopy and feeds power at the end from a 24VAC Class 2 electronic low voltage LED transformer (included), which fits inside a standard 4" electrical box with round plaster ring and is dimmable with an electronic low voltage dimmer. The adjustable (up to 12 feet) aircraft and power cables allow for mounting at any ceiling angle up to 45 degrees. A Swag Hook is also available to extend the cable to an electrical box that is not located directly above desired fixture location. Hardware and supporting cables are Antique Bronze for Antique Bronze and Black fixtures and are Satin Nickel for all other finishes. Power cables are Satin Nickel for all finish options. Fixture is covered by a 5 year warranty.

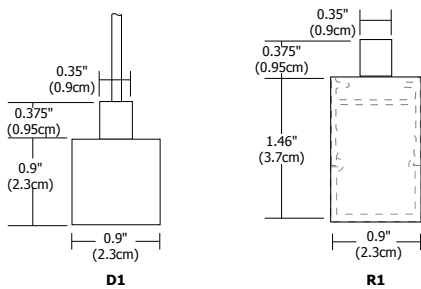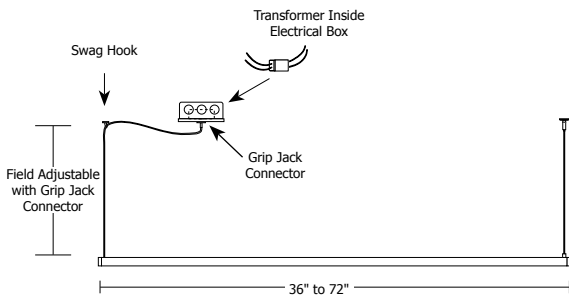

## Finish:

Satin Aluminum, Satin Nickel, Chrome, Antique Bronze, White and Black; Custom finishes also available.

## Applications:

Indoor - Architectural lighting, general lighting and retail

## Lamp:

Version	Watts per Foot	Lumens per Watt	Lumens per Foot	92+CRI 27K, 30K	85+CRI 24K, 35K, 40K, 57K	50,000 Hour Lamp Life
D1	7	34	241	●	●	●
R1	7	36	262	●	●	●
T1	7	36	268	●	●	●

Lumen values are based on the 3000K LED test.

## Power Supply:

120V input, 24VAC Class 2 output; electronic low voltage LED transformer (included) that fits inside standard junction box

## Dimming

Dimmable with electronic low voltage dimmer. Lutron: Diva #DVELV-300P; Skylark #SELV-300P dimmers recommended

## Channel Suspension Swag Hook (sold separately):

Swag Hook, CS-SWAG, extends a cable to an electrical box that is not located directly above desired fixture location.

System

CF

CF Cirrus Float

Lens

D1

D1 Direct 0.9" Lens  
R1 Rectangular 0.9" Lens  
T1 Tubular 1.125" Lens

Power Feed

E

E End Feed

Length in Inches

72IN

36 36" 60 60"  
48 48" 72 72"  
Customize in 2.4 inch increments

Color Temperature

27K

24K 2400K Amber White  
27K 2700K Very Warm White  
30K 3000K Warm White  
35K 3500K Neutral White  
40K 4000K Cool White  
57K 5700K Daylight White

Finish

SA

SA Satin Aluminum BZ Antique Bronze  
SN Satin Nickel BK Black  
CH Chrome WH White

PROJECT:

FIXTURE TYPE:

DATE:



Please refer to chart below for exact lengths Cirrus Float - End Feed

ORDERING CODE	LENGTH (INCHES)
36	37.1
48	49.1
60	61.1
72	73.1

PROJECT:

FIXTURE  
TYPE:

DATE:

