

CIRRUS FLOAT STICK - END FEED, 120V/24VAC FIXTURE - 92CRI



MADE IN THE USA



Description:

The Cirrus Float Stick - End Feed features a direct 1" lens with 100 degree beam spread and five wood finish options. The adjustable aircraft cables allow mounting at any ceiling angle up to 45 degrees. At 7 watts per foot, the 24 volt AC suspension contains very warm white 2700K or warm white 3000K 92CRI LEDs and is available in lengths from 36 inches up to 72 inches. The Cirrus Float includes square canopy and feeds power at the end from a 24 VAC Class 2 electronic low voltage LED transformer (included), which fits inside a standard 4" electrical box with round plaster ring and is dimmable with an electronic low voltage dimmer. A Swag Hook is also available to extend the cable to an electrical box that is not located directly above desired fixture location. All cables have a Satin Nickel finish. Fixture is covered by a 5 year warranty.

Finish:

Wood Maple, Wood Walnut, Wood Cherry, Wood White Oak, and Wood Espresso

Applications:

Indoor - Architectural lighting, general lighting and retail

Lamp:

Version	Watts per Foot	Lumens per Watt	Lumens per Foot	92CRI 27K, 30K	50,000 Hour Lamp Life
Stick End Feed	7	34	241	●	●

Lumen values are based on the 3000K LED test.

Power Supply:

120V input, 24VAC Class 2 output; electronic low voltage LED transformer (included) that fits inside standard junction box



Dimming

Dimmable with electronic low voltage dimmer.

Lutron: Diva #DVELV-300P; Skylark #SELV-300P dimmers recommended

Channel Suspension Swag Hook (sold separately):

Swag Hook, CS-SWAG, extends a cable to an electrical box that is not located directly above desired fixture location.

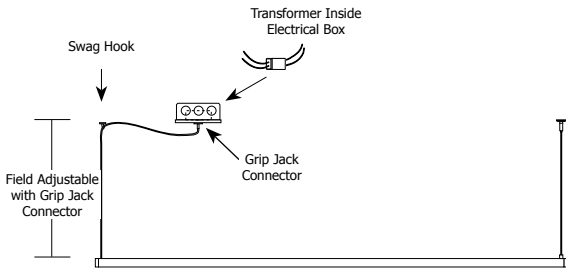

System	Lens	Power Feed	Length in Inches	Color Temperature	Finish
CF	ST	E	72IN	27K	WM
CF Cirrus Float	ST Stick	E End Feed	36 36" 60 60" 48 48" 72 72"	27K 2700K Very Warm White 30K 3000K Warm White	WM Wood Maple WN Wood Walnut WC Wood Cherry WO Wood White Oak WE Wood Espresso

PROJECT:

FIXTURE TYPE:

DATE:

