




1718 W. Fullerton Chicago, IL 60614  
 Ph: 773.770.1195 • Fax: 773.935.5613  
 www.PureEdgeLighting.com • info@PureEdgeLighting.com  
 © 2016 PureEdge Lighting. All Rights Reserved.

## Installation Instructions for **100 Watt DIN Rail Power Supply 24V**

### GENERAL INFORMATION


- This instruction shows a typical installation.
- DIN Rail power supply powers Pure Smart TruColor™ LED Strips and linear fixtures. Refer to the instructions provided with the Pure Smart TruColor™ LED Strips and linear fixtures to complete the installation.

**SAVE THESE INSTRUCTIONS!**



### Install the Interface

**A**

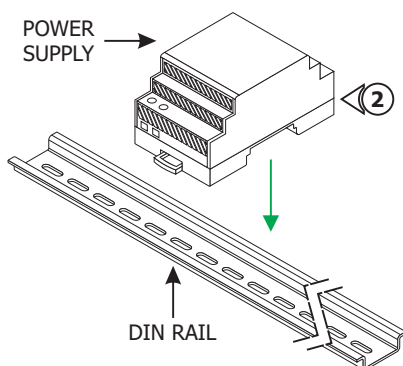


**1:** Determine the mounting location for the Power Supply.


**2:** To install the Power Supply on a DIN rail, ensure the DIN rail is properly mounted. Gently release the mounting tab on the bottom of the Power Supply and hook one side of the Power Supply on the top edge of the DIN rail. Press down until the mounting tabs snap securely onto the DIN rail.

**3:** Connect the line power supply wire to the line voltage wire. Connect the neutral power supply wire to the line voltage neutral wire.

**B**

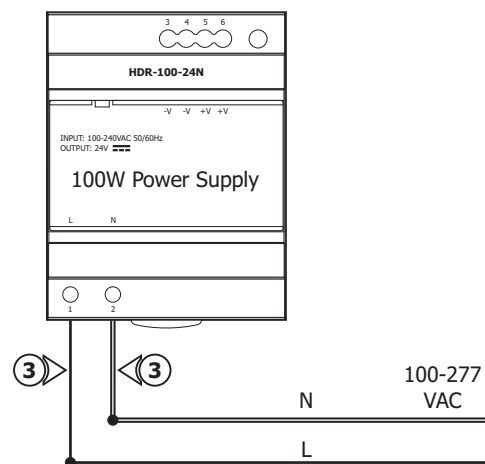


**C**

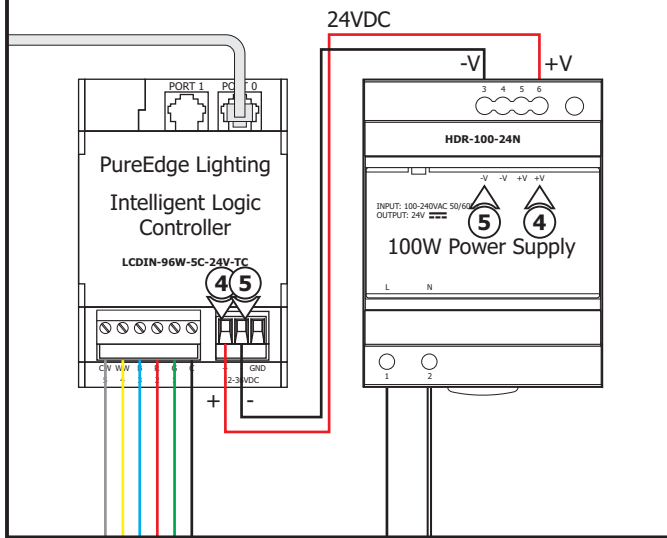


- 4:** Insert one end of the red wire into the +V terminal on the 100W Power Supply. Insert the other end of the red wire into the + terminal on the Intelligent Logic Controller.
- 5:** Insert one end of the black wire into the -V terminal on the 100W Power Supply. Insert the other end of the black wire into the - terminal on the Intelligent Logic Controller.

## General Wiring Diagram

### Single Application

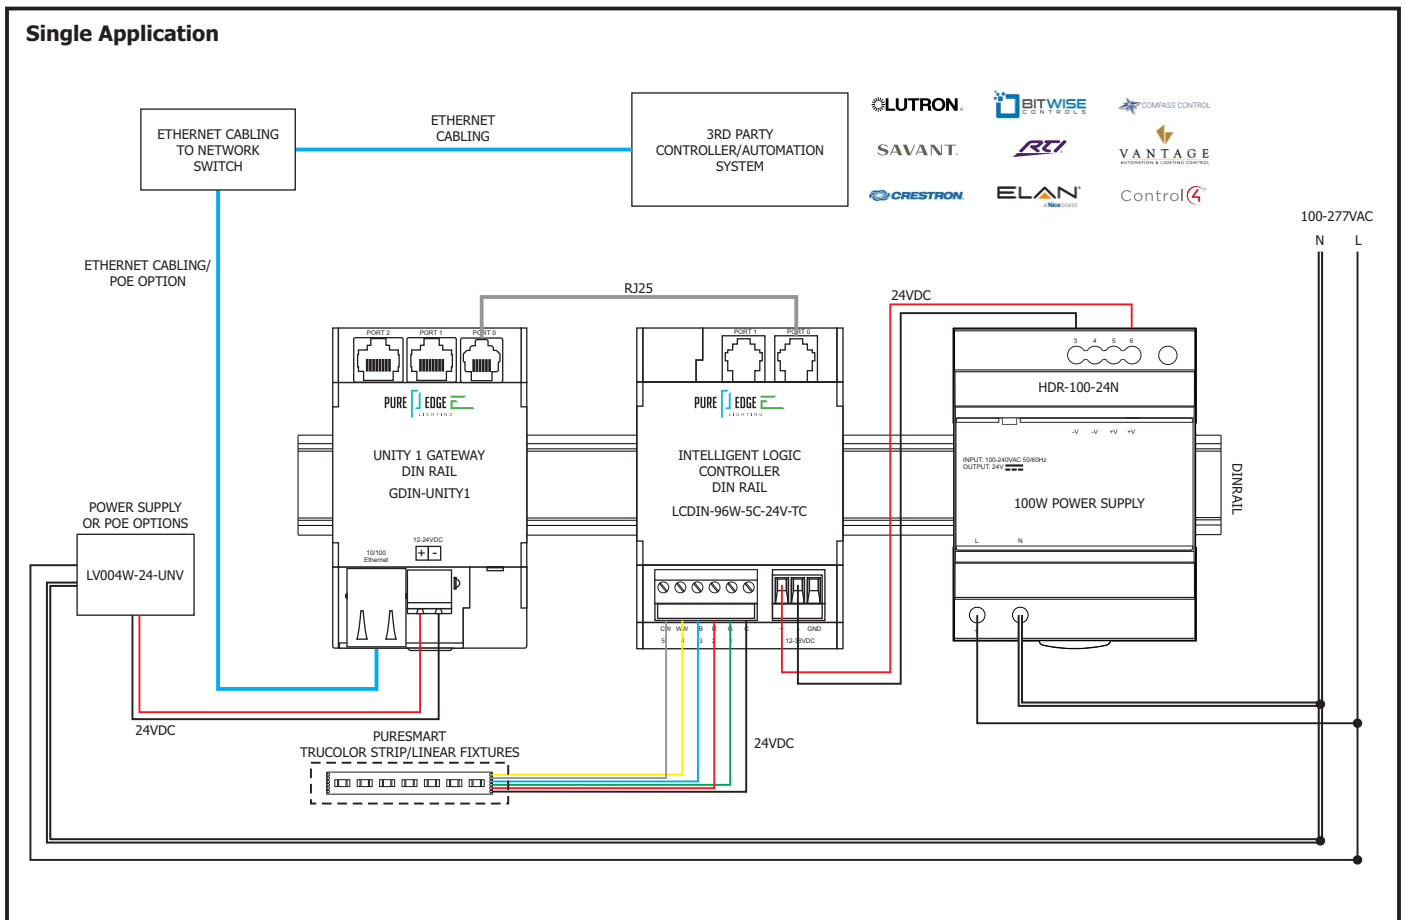

## Multiple Application

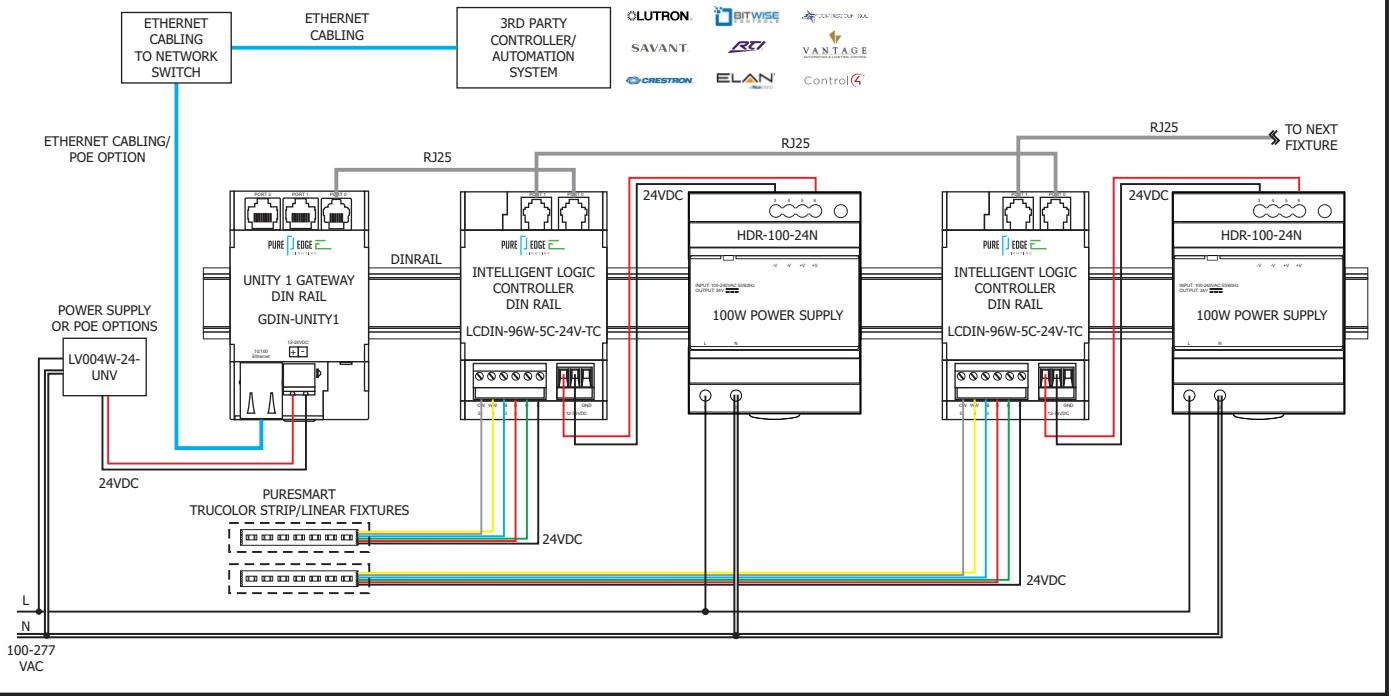




1718 W. Fullerton Chicago, IL 60614  
 Ph: 773.770.1195 • Fax: 773.935.5613  
 www.PureEdgeLighting.com • info@PureEdgeLighting.com  
 © 2016 PureEdge Lighting. All Rights Reserved.

## Installation Instructions for **100 Watt DIN Rail Power Supply 48V**

### GENERAL INFORMATION


- This instruction shows a typical installation.
- DIN Rail power supply powers Luca Downlight DMX controller. Refer to the instructions provided with the Luca Downlight to complete the installation.

**SAVE THESE INSTRUCTIONS!**



### Install the Interface


**A**

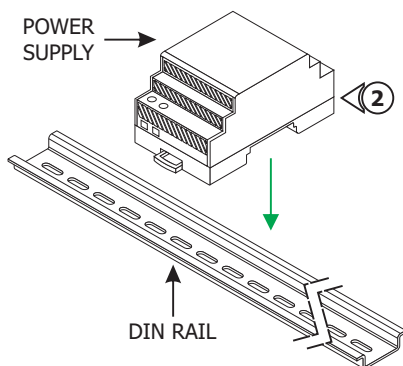

**1:** Determine the mounting location for the Power Supply.

**2:** To install the Power Supply on a DIN rail, ensure the DIN rail is properly mounted. Gently release the mounting tab on the bottom of the Power Supply and hook one side of the Power Supply on the top edge of the DIN rail. Press down until the mounting tabs snap securely onto the DIN rail.

**B**

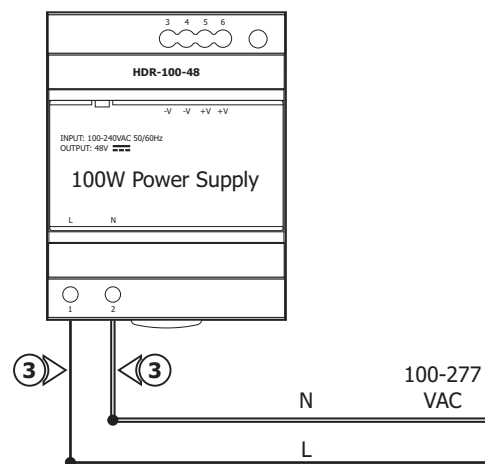

**3:** Connect the line power supply wire to the line voltage wire. Connect the neutral power supply wire to the line voltage neutral wire.

