

**Kable Lite Surface Transformer-100W EI LED**



**DESCRIPTION**


This single-feed surface transformer converts standard 120 line-voltage to 12 volts to provide the necessary voltage for powering a Kable Lite low-voltage lighting system. It can power lamps totaling up to 100 watts. The transformer is concealed inside a decorative housing with a fast acting secondary circuit breaker that will safely turn the system off should a short occur. Once the short has been removed the unit can be reset by simply flipping the wall switch off and back on.

**INSTALLATION**

This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box (not included).

**OTHER**

Black and white finish have chrome feeds. The shortest rigid standoff that can be used with this surface transformer is the 5" rigid post standoff (sold separately). 12 volt transformers require the use of 12 volt lamps.

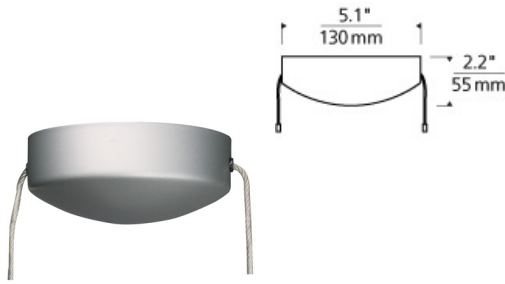

kable lite surface transformer-100w ei led

**ORDERING INFORMATION**

**700SRT100E** FINISH

- Z- ANTIQUE BRONZE  
LED
- B- BLACK  
LED
- C- CHROME  
LED
- S- SATIN NICKEL  
LED
- W- WHITE  
LED

As a general rule when using LED fixtures we do not recommend using greater than 70% of specified maximum wattage on the transformer due to inrush current. for assistance, please contact our technical support department.



**TECH LIGHTING®**

7400 Linder Avenue      T 847.410.4400  
Skokie, Illinois 60077      F 847.410.4500

**Tech Lighting, L.L.C.**

700SRT100E _____
FIXTURE TYPE: _____
JOB NAME: _____
NOTES: _____
_____
_____

