



1718 W. Fullerton Ave Chicago, IL 60614 Tel: 773-770-1195 Fax: 773-935-5613 www.edgelighting.com info@edgelighting.com


Installation Instructions for Night Owl

IMPORTANT INFORMATION

- This product is ETL listed for indoor locations.
- This product is for wall mount application.
- This instruction shows a typical installation for indoor.

SAVE THESE INSTRUCTIONS!


Install the Fixture



2: Line up the crossbar slots with the electrical box holes, and secure it in place by tightening the two #8-32 screws provided.



1: Loosen (Do Not Remove) the two M3 set screws on top and bottom of the canopy with the 1.5mm Allen wrench provided. Carefully remove the crossbar.

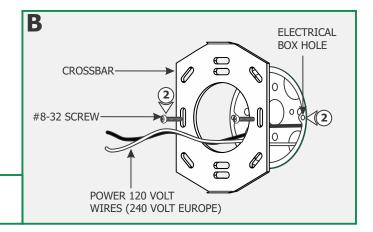

- POWER WIRES PRIMARY WIRES LED DRIVER LOW VOLTAGE **WIRES**
- 5: Place the LED driver and wires inside the electrical box.
- **6:** Slide the canopy onto the crossbar and secure it in place by tightening the two M3 set screws with the 1.5mm Allen wrench.

NOTE: The fixture contains a **1 Watt** integrated LED lamp. This lamp is rated for 50,000 hours.

7: Use the switch to control the lamp intensity.

- 3: Connect the LED driver white primary wire to the neutral power wire with a wire nut.
- 4: Connect the LED driver black primary wire to the hot power wire with a wire nut.

