
REV.03.25.16



Maximum Length Before Refeeding: 36 Feet

LENGTH IN FEET TOTAL WATTAGE LENGTH IN FEET TOTAL WATTAGE 1 3W 19 50W 2 6W 20 52W 3 8W 21 55W 4 11W 22 58W 5 13W 23 60W 6 16W 24 63W 7 19W 25 65W 8 21W 26 68W 9 24W 27 71W 10 26W 28 73W 11 29W 29 76W 12 32W 30 78W 13 34W 31 81W 14 37W 32 84W 15 39W 33 86W 16 42W 34 89W 17 45W 36 94W				
2 6W 20 52W 3 8W 21 55W 4 11W 22 58W 5 13W 23 60W 6 16W 24 63W 7 19W 25 65W 8 21W 26 68W 9 24W 27 71W 10 26W 28 73W 11 29W 29 76W 12 32W 30 78W 13 34W 31 81W 14 37W 32 84W 15 39W 33 86W 16 42W 34 89W 17 45W 35 91W				TOTAL WATTAGE
3 8W 21 55W 4 11W 22 58W 5 13W 23 60W 6 16W 24 63W 7 19W 25 65W 8 21W 26 68W 9 24W 27 71W 10 26W 28 73W 11 29W 29 76W 12 32W 30 78W 13 34W 31 81W 14 37W 32 84W 15 39W 33 86W 16 42W 34 89W 17 45W 35 91W	1	3W	19	50W
4 11W 22 58W 5 13W 23 60W 6 16W 24 63W 7 19W 25 65W 8 21W 26 68W 9 24W 27 71W 10 26W 28 73W 11 29W 29 76W 12 32W 30 78W 13 34W 31 81W 14 37W 32 84W 15 39W 33 86W 16 42W 34 89W 17 45W 35 91W	2	6W	20	52W
5 13W 23 60W 6 16W 24 63W 7 19W 25 65W 8 21W 26 68W 9 24W 27 71W 10 26W 28 73W 11 29W 29 76W 12 32W 30 78W 13 34W 31 81W 14 37W 32 84W 15 39W 33 86W 16 42W 34 89W 17 45W 35 91W	3	8W	21	55W
6 16W 24 63W 7 19W 25 65W 8 21W 26 68W 9 24W 27 71W 10 26W 28 73W 11 29W 29 76W 12 32W 30 78W 13 34W 31 81W 14 37W 32 84W 15 39W 33 86W 16 42W 34 89W 17 45W 35 91W	4	11W	22	58W
7 19W 7 19W 25 65W 8 21W 9 24W 27 71W 10 26W 28 73W 11 29W 12 32W 13 34W 14 37W 32 84W 15 39W 16 42W 17 45W	5	13W	23	60W
8 21W 26 68W 9 24W 27 71W 10 26W 28 73W 11 29W 29 76W 12 32W 30 78W 13 34W 31 81W 15 39W 33 86W 16 42W 34 89W 17 45W 35 91W	6	16W	24	63W
9 24W 27 71W 10 26W 28 73W 11 29W 29 76W 12 32W 30 78W 13 34W 31 81W 14 37W 32 84W 15 39W 33 86W 16 42W 34 89W 17 45W 35 91W	7	19W	25	65W
10 26W 28 73W 11 29W 29 76W 12 32W 30 78W 13 34W 31 81W 14 37W 32 84W 15 39W 33 86W 16 42W 34 89W 17 45W 35 91W	8	21W	26	68W
11 29W 29 76W 11 29W 29 76W 12 32W 30 78W 13 34W 31 81W 14 37W 32 84W 15 39W 33 86W 16 42W 34 89W 17 45W 35 91W	9	24W	27	71W
12 32W 30 78W 13 34W 31 81W 14 37W 32 84W 15 39W 33 86W 16 42W 34 89W 17 45W 35 91W	10	26W	28	73W
12 12 13 13 34W 31 81W 14 37W 32 84W 15 39W 33 86W 16 42W 34 89W 17 45W 35 91W	11	29W	29	76W
14 37W 32 84W 15 39W 33 86W 16 42W 34 89W 17 45W 35 91W	12	32W	30	78W
15 39W 33 86W 16 42W 34 89W 17 45W 35 91W	13	34W	31	81W
16 42W 34 89W 17 45W 35 91W	14	37W	32	84W
17 45W 35 91W	15	39W	33	86W
	16	42W	34	89W
18 47W 36 94W	17	45W	35	91W
	18	47W	36	94W



Description:

Soft Strip (SS3) RGB provides dynamic color effects with red, green and blue LEDs. The 1/2" wide flexible copper strip, with an optically clear protective coating, is sold in 1 ft increments up to 36 ft. Includes Snap & Light Connector SS-SLC-96IN. Additional Snap & Light Connectors (pages 3-4) are also available for making custom configurations. At only 2.6 watts per foot, this system can be controlled using a compatible RGB 24 volt DC power supply with RGB DMX driver. Self-adhering SS3 mounts to most smooth finished surfaces with industrial strength 3M tape (provided on back of strip); some unfinished surfaces may require screw-in mounting clips (sold separately). Designed for indoor, open-air environments, SS3 includes a flexible aluminum heat sink to extend LED life. Fixtures include a 5 year warranty.

Applications:

Indoor Only - Under/above cabinet, cove lighting or accent toe kicks, behind sheer curtains, step, entertainment, display, night clubs, molding accent, media room

Lamp:

18 RGB LEDs per foot LED lamps consume 2.6 watts per foot

Average Lamp Life:

32,000 hours

Controller:

CTP Touch Screen Controller with Power Supply **CDP** Color Dial Controller with Power Supply

24VDC Power Supply with DMX Driver (Sold Separately): PSB-100W-24VDC-RGB 100W output, 120-277V Input PSB-2X100W-24VDC-RGB 2x100W output, 120-277V Input PSB-3X100W-24VDC-RGB 3x100W output, 120-277V Input PSB-4X100W-24VDC-RGB 4x100W output, 120-277V Input

Mounting Straps & Clips:

SS-SU

Use U-Strap every 6 to 12 inches for extra support (30 per package).

SS-ST

Use Tie Strap every 6 to 12 inches for extra support (30 per package).

SS-MCL

Screw In Mounting Clip mounts beneath strip, snapping the Strip into place for additional support (10 per package).



PROJECT:


www.edgelighting.com

REV.03.25.16


Application: DMX Control options SS3 RGB Soft Strip 3W-24V

Power Supply with DMX Driver:

PSB-100W-24VDC-RGB: 100W output, 120-277V Input

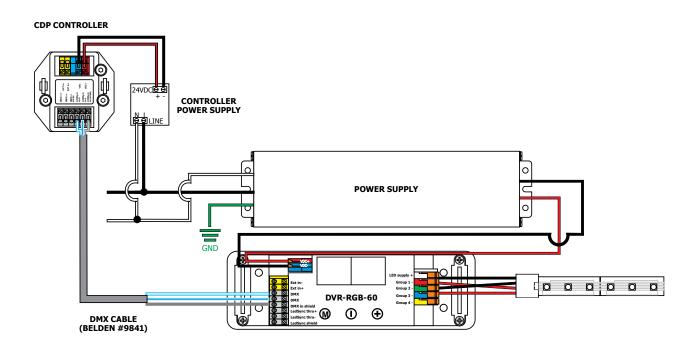

STRIP DOES NOT BEND 90°



PROJECT:



www.edgelighting.com

ԵՍՆԵ

LIGHTING

SNAP & LIGHT ACCESSORIES

REV.03.25.16



Cut in middle of joining contacts



Scrape protective coating from contacts



Place the Strip end under the plastic guide and push under the snap contacts.



Close the cover




Snap the cover to secure in place

Snap & Light Accessories

Snap & Light Accessories provide easy connection of white or RGB Soft Strip sections. The do-it-yourself accessories — without limitations— allow cutting and rejoining of Soft Strip at any point. The accessories attach to the end of Soft Strip, secure the Strip and snap shut to lock it into place.






Snap & Light Straight Joiner Connectors

Snap & Light Straight Joiner Connectors join two cut sections of white or RGB Soft Strip end to end.



(3.2cm)



Snap & Light L-Connectors

Snap & Light L-Connectors join and conduct power to two sections of white or RGB Soft Strip in an L-shape.






1718 W. Fullerton Ave. Chicago, IL 60614

www.edgelighting.com


REV.03.25.16

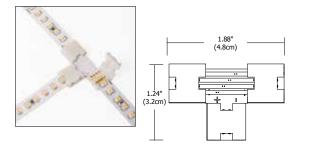

Snap & Light T-Connectors

Snap & Light T-Connectors join and conduct power to three sections of white or RGB Soft Strip in a T-shape.




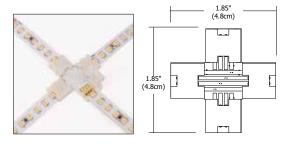

Snap & Light X-Connectors


Snap & Light X-Connectors join and conduct power to four sections of of white or RGB Soft Strip in an X-shape.



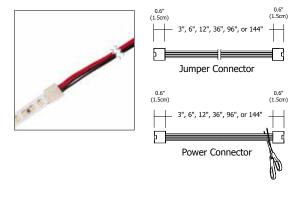

Snap & Light Jumper or Power Connectors

Snap & Light Jumper or Power Connectors join two cut sections of white or RGB Soft Strip end-to-end. Cut and strip the connector wires to use as a Power Connector.

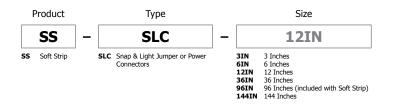

PROJECT:

FIXTURE

TING