


Assembly Instructions For


F2537/4 (E) 12/09

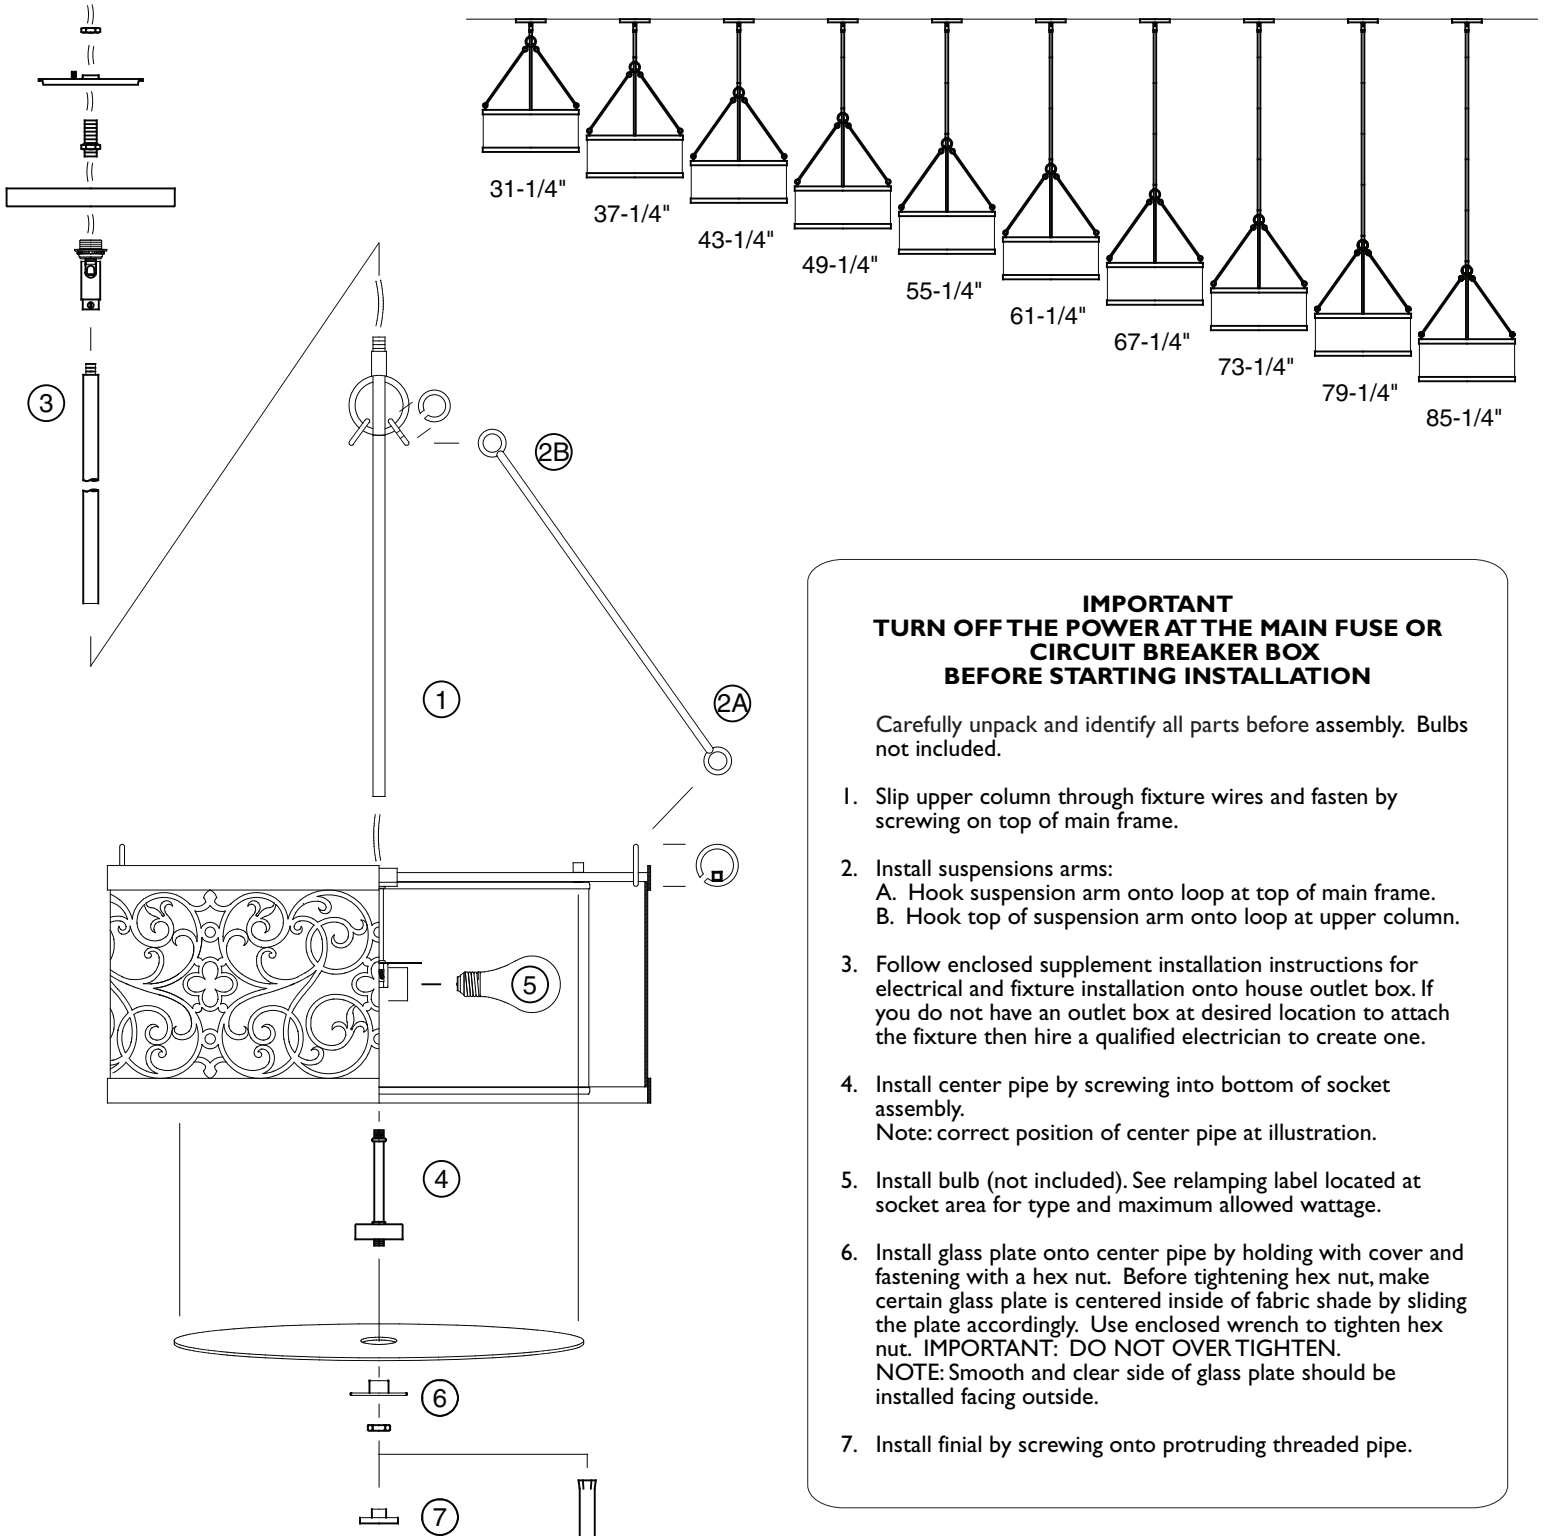

IMPORTANT
TURN OFF THE POWER AT THE MAIN FUSE OR
CIRCUIT BREAKER BOX
BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs not included.

1. Slip upper column through fixture wires and fasten by screwing on top of main frame.
2. Install suspensions arms:
 A. Hook suspension arm onto loop at top of main frame.
 B. Hook top of suspension arm onto loop at upper column.
3. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture then hire a qualified electrician to create one.
4. Install center pipe by screwing into bottom of socket assembly.
 Note: correct position of center pipe at illustration.
5. Install bulb (not included). See relamping label located at socket area for type and maximum allowed wattage.
6. Install glass plate onto center pipe by holding with cover and fastening with a hex nut. Before tightening hex nut, make certain glass plate is centered inside of fabric shade by sliding the plate accordingly. Use enclosed wrench to tighten hex nut. **IMPORTANT: DO NOT OVER TIGHTEN.**
 NOTE: Smooth and clear side of glass plate should be installed facing outside.
7. Install finial by screwing onto protruding threaded pipe.



MURRAY
FEISS

GENERATION
 BRANDS™ 