


# LED Copper Pathlyte (CUL2D) Specification Sheet

Project Name:	Location:	MFG: Philips Hadco
Fixture Type:	Catalog No.:	Qty:

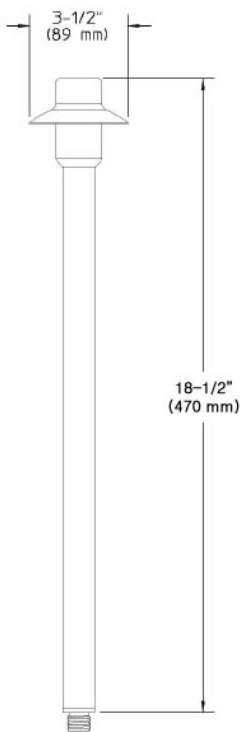

## Ordering Guide

Example: CUL2D W S7 \_

<b>Product Code</b>	CUL2D	LED Copper Pathlyte
<b>CCT</b>	W C	Warm 3000K Cool 4000K
<b>Mounting</b>	S7	Mounting Stake
<b>Finish</b>	_	Natural Copper *1

\*1 When ordering Natural Copper, product code will read as CUL2D.

## Specifications

### HOUSING:

Spun solid copper roof with copper stem. Machined copper threaded adapter for tool-less relamping. 1/2" NPS male threads to screw onto accessory mounting stake or junction box, sold separately.

### FINISH:

Natural Copper is bright polished, untreated copper. Color will age naturally to a fine dark copper patina.

### OPTICAL ASSEMBLY:

Reflective white powdercoat on underside of roof. Frosted tempered glass lens.

### LAMPING:

Color Temperature (CCT): 4,000K nominal or 3,000K nominal. Approximately 50,000 hours of operational life (at 25°C ambient temp. and 70% lumen maintenance). >80 CRI.

### ELECTRICAL ASSEMBLY:

12 volt fixture is pre-wired with 6-ft. pigtail of 18-2 AWG, 105° C, SPT-1W wire. Input voltage range (VAC): 11 - 15, (Magnetic low voltage transformer required). 4.2 total watts consumed.

### IP RATING:

IP66: Dust-tight and sealed against direct jets of water.

### WARRANTY:

Five-year limited warranty.

### CERTIFICATIONS:

ETL listed to U.S. safety standards for wet locations. cETL listed to Canadian safety standards for wet locations. Manufactured to ISO 9001:2008 Standards.

### Height :

18 1/2" (470mm)

### Width:

3 1/2" (89mm)

# LED Copper Pathlyte (CUL2D) Specification Sheet

Project Name:

Location:

MFG: Philips Hadco

Fixture Type:

Catalog No.:

Qty:

**Max. Weight:**

1.85 lb