

LED Copper Pathlyte (CUL7D) Specification Sheet

Project Name:


Location:

MFG: Philips Hadco

Fixture Type:

Catalog No.:

Qty:

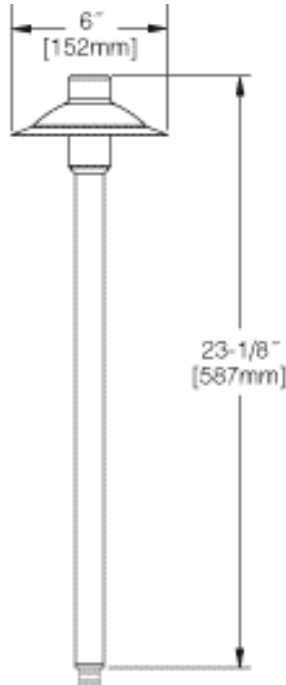

Ordering Guide

Example: CUL7D W S7 _

Product Code	CUL7D	LED Copper Pathlyte
CCT	W C	Warm 3000K Cool 4000K
Mounting	S7	Mounting Stake
Finish	_	Natural Copper *1

*1 When ordering Natural Copper, product code will read as CUL7D.

Specifications

HOUSING:

Spun solid copper roof with copper stem. Machined copper threaded adapter for tool-less relamping. 1/2" NPS male threads to screw onto accessory mounting stake or junction box, sold separately.

FINISH:

Natural Copper is bright polished, untreated copper. Color will age naturally to a fine dark copper patina.

OPTICAL ASSEMBLY:

Reflective white powdercoat on underside of roof. Frosted tempered glass lens.

LAMPING:

Color Temperature (CCT): 4,000K nominal or 3,000K nominal. Approximately 50,000 hours of operational life (at 25°C ambient temp. and 70% lumen maintenance). >80 CRI.

ELECTRICAL ASSEMBLY:

Input voltage range (VAC): 11 - 15, (Magnetic low voltage transformer required). 4.2 total watts consumed. 12 volt fixture is pre-wired with 6-ft. pigtail of 18-2 AWG, 105° C, SPT-1W wire.

IP RATING:

IP66: Dust-tight and sealed against direct jets of water.

WARRANTY:

Five-year limited warranty.

CERTIFICATIONS:

ETL listed to U.S. safety standards for wet locations. cETL listed to Canadian safety standards for wet locations. Manufactured to ISO 9001:2008 Standards.

Height :

19 1/8" (485 mm)

Width:

6" (152mm)

Max. Weight:

3.3 lb