


Aluminum Bullyte (B3) Specification Sheet

Project Name:	Location:	MFG: Philips Hadco
Fixture Type:	Catalog No.:	Qty:

Ordering Guide

Example: B3 A

Product Code	B3	Aluminum Bullyte
Finish	A	Black
	H	Bronze
	G	Verde

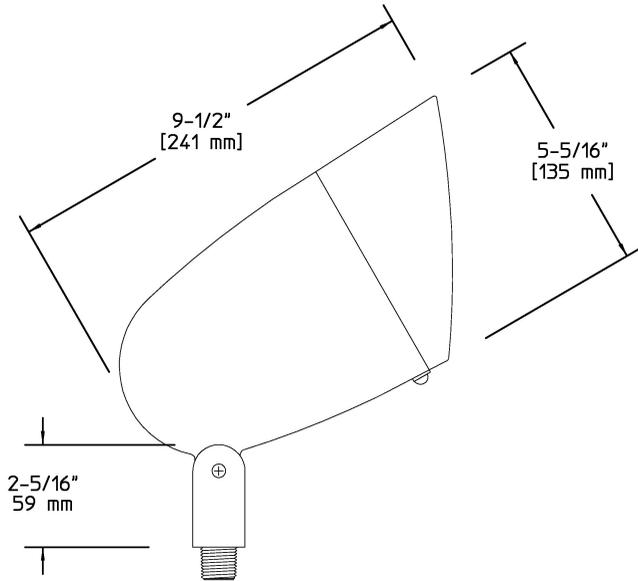

Specifications

HOUSING:

Die-cast aluminum. Fully-adjustable swivel arm with vibration-proof locking teeth. Gasketing is silicone. Fasteners are 300 series stainless steel. Fully rotatable shroud, gasketed, cast aluminum. 1/2" NPS male threads to screw onto accessory mounting stake or junction box, sold separately.

FINISH:

Thermoset polyester powdercoat is electrostatically applied after a five-stage conversion cleaning process and bonded by heat fusion thermosetting.

OPTICAL ASSEMBLY:

Clear tempered glass affixed at 10° angle for natural cleaning.

LAMPING:

100W maximum PAR30/R30 medium base lamp. Lamp is not included. Lower wattage lamps are acceptable. HID PAR30 MH or MV acceptable with remote ballast (not included).

ELECTRICAL ASSEMBLY:

4kv rated porcelain mini-can base. Nickel-plated screw shell with center contact.

BALLAST:

Must order inground (IBH) or above ground (ABH) ballast housing separately.

WARRANTY:

Three-year limited warranty.

CERTIFICATIONS:

ETL listed to U.S. safety standards for wet locations. cETL listed to Canadian safety standards for wet locations. Manufactured to ISO 9001:2008 Standards.

Width:

5 5/16" (135mm)

Length:

9 1/2" (241mm)

Max. Weight:

2.96 lb.