



# Mounting Canisters

Cat. No.

Canss, Dkcan, Edkcan, Elcan, Eflcan, Fflcan, Fflcan200, Flucan, Plcan, Slcan, SlcanStud, Slcan200

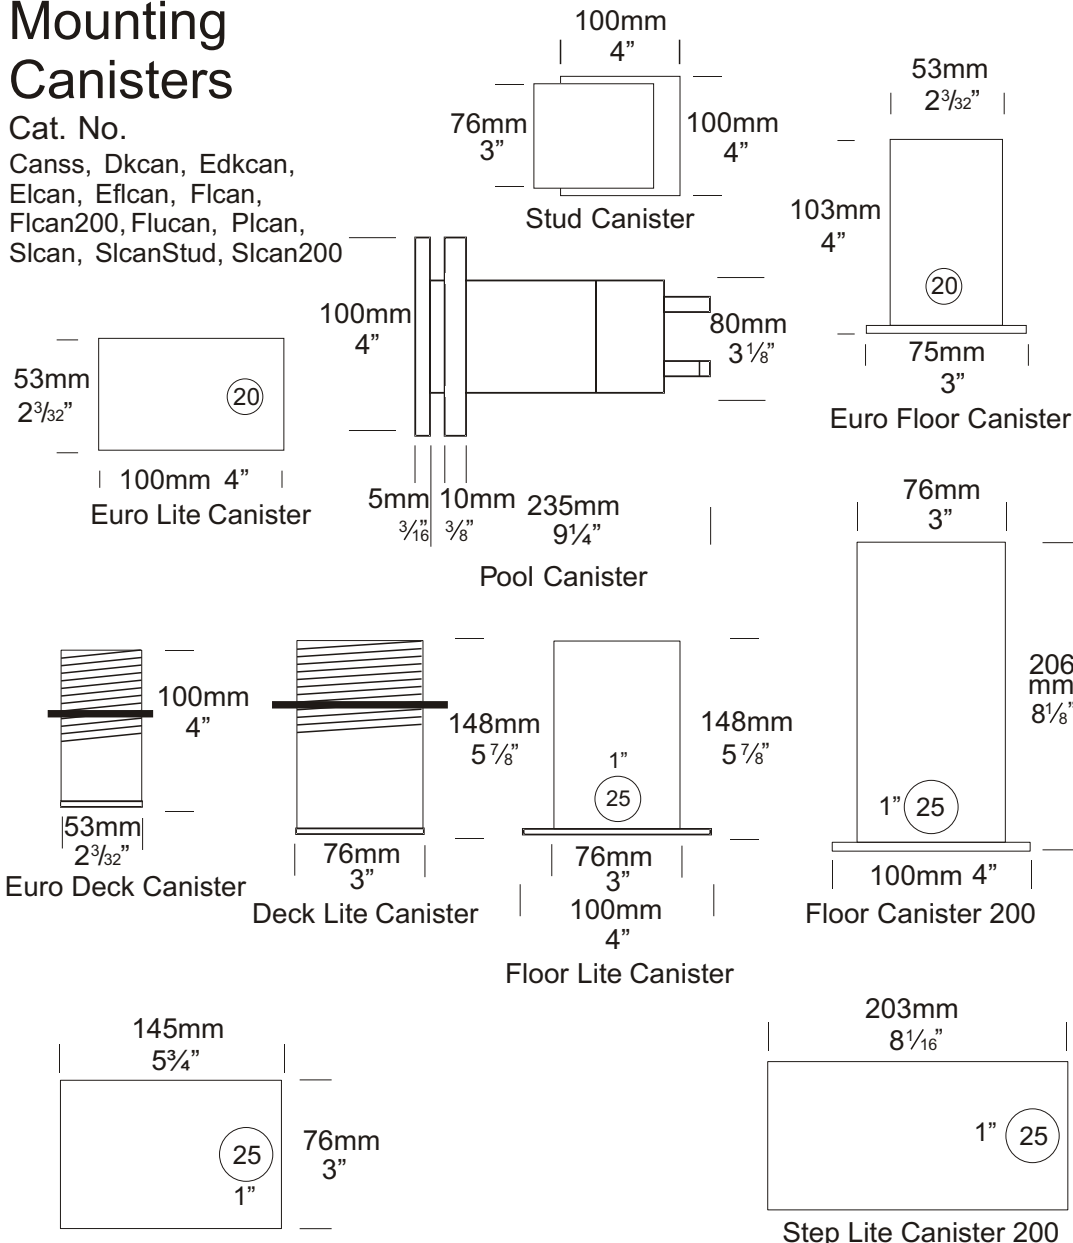

Hunza™ mounting canisters provide an efficient and professional method of luminaire mounting. The Step Lite canisters are available in aluminium and 316 stainless steel for high corrosion locations e.g. sea front areas and lime stone installations etc. The Deck canister is adjustable and is suitable for use in varying thicknesses of timber - 10mm (3/8") - 76mm (3").



## Ordering Information

Canister Type	Material
Canss - Step Canister	316 Stainless Steel
Dkcan - Deck Canister	Aluminium
Edkcan - Euro Deck Canister	Aluminium
Elcan - Euro Lite Canister	Aluminium
Eflcan - Euro Floor Canister	Aluminium
Fflcan - Floor Lite Canister	Aluminium
Fflcan200 - Floor Lite Canister 200	Aluminium
Plcan - Pool Canister	PVC
Slcan - Step Canister	PVC
Slcan200 - Step Canister 200	Aluminium
SlcanStud - Canister Stud Mount	Aluminium

Ordering Example: Fflcan - Floor Canister in Aluminium

PURE OUTDOOR LIGHTING

**HUNZA FACTORY**  
 130 Felton Mathew Ave  
 Glen Innes  
 Auckland 1072  
 New Zealand

Ph: 64-9-528 9471  
 Fax: 64-9-528 9361  
[hunza@hunza.co.nz](mailto:hunza@hunza.co.nz)  
[www.hunza.co.nz](http://www.hunza.co.nz)

**INTERNATIONAL CONTACTS:**  
[www.hunza.co.nz/contacts.php](http://www.hunza.co.nz/contacts.php)  
Specifications may change without notice.  
 Manufactured in New Zealand.  
 © 2011 Hunza Holdings Ltd.

## Canister Construction

CNC machined from one of the following materials:

Dkcan, Elcan, Flcan, Slcan  
Flcan200, Slcan200:

High corrosion resistant 76.6mm (3") x 6mm (¼") aluminium with chromate substrate

Canss:

316 Stainless steel 76mm (3") x 5mm (3/8").

Flcan and Plcan:

Engineering Grade PVC with moulded PVC end cap.

## Mounting

When using a Hunza™ canister - the canister, conduits and cables are installed at the same time. On final completion the luminaire is wired to the supply cable and fitted into the canister. The luminaire is held by two silicone "O" rings in the canister.

Canss, Elcan, Flcan, Flcan200, Slcan, Slcan200: Cast into concrete, brick, concrete blocks, etc.

Dkcan: Mounted into wooden decks, wooden frames, etc.

Plcan: Cast into a new concrete wall, epoxied into an existing concrete wall or use lock nut provided with canister to clamp tight in a fibre glass pool wall.

## Features

Gaskets:

Silicone, iron impregnated 220<sup>o</sup>c (428<sup>o</sup>f).

Conduit Entry Size:

25mm (1").

Installation:

Due to the gasket mounting system the luminaire has no screw holes in it's flange to mount it in position.

Deck Canister:

Adjustable locking ring with 4 counter sunk screw holes suitable for use with timber 10mm thicknesses (3/8") - 76mm (3").

Pool Canister:

Manufactured from PVC, suitable for mounting three wall types - fibre glass pool wall, existing concrete pool wall, new concrete pool wall.

## Standards

UL1838



## Canister Weight

Canss 1.040kg (2lb 4oz)

Dkcan .515kg (1lb 2oz)

Elcan .410kg (14oz)

Flcan .510kg (1lb 1oz)

Flcan 200 .560kg (1lb 3oz)

Plcan .210kg (7oz)

Slcan .460kg (1lb)

Slcan200 .510kg (1lb 2oz)