



Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

# IC LED OUTDOOR STEP LIGHT

## LED IC115LEDHSG, IC115LEDPM



### PRODUCT DESCRIPTION

The LED step light is rated for use in outdoor or indoor wall mount applications including concrete pour, brick masonry or drywall

- Recessed housing is IC rated and can be completely covered with insulation
- Back housing ships separately from power module for rough-in purposes
- Designed to provide 50,000 hours of life and is compatible with standard trims
- 5 year warranty on LED components.

### ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

- No harmful ultraviolet or infrared wavelengths
- No lead or mercury
- Comparable light output to compact fluorescent step light

### PRODUCT SPECIFICATIONS

**Housing** Die cast aluminum housing painted white for durability

- Gasket for water tight seal in wet locations
- Cover plate provided to protect housing interior during rough-in
- (2) 1/2" conduit compression fittings provided for wiring
- (1) conduit fitting plug included
- Two brackets supplied for nailing unit to studs.

**Power Module** LED light engine and driver mounted directly to metal tray assembly for ease of wiring and installation into housing after rough-in.

**LED Light Engine:** LED PCB utilizes 1 watt high lumen output LEDs binned to Energy Star standards

- 3000K or 4100K color temperatures available.

**LED Driver:** Non-dimming driver accommodates input voltage of 120 volts AC at 50/60Hz

- Power factor > 0.9 at 120V input
- Driver is thermally protected and has integral overload and short circuit protection
- Terminal connections provided as standard for easy removal.

**Trims** Available in textured white or black powder coat on cast aluminum

- Fastens to housing with two allen head screws
- Opal diffuser supplied with all trims.

**Life** Rated for 50,000 hours at 70% lumen maintenance.

**Labels** UL listed for wet locations, concrete pour approved



- UL and cUL Listed, RoHS compliant.

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

### DIMENSIONS

#### IC115LEDHSG

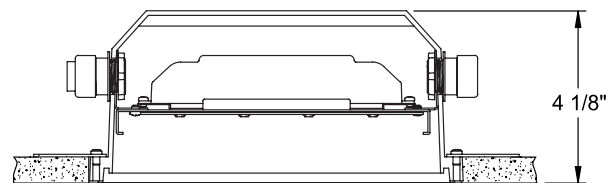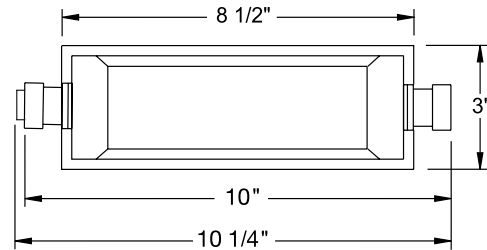

9" X 3" WALL OPENING

### ELECTRICAL DATA








Input Voltage	120V
Input Power	6.4W
Input Current	0.06A
Frequency	50/60Hz
THD	< 10%
Minimum starting temp	-20°C (-4°F)

# IC LED OUTDOOR STEP LIGHT

## LED

### IC115LEDHSG, IC115LEDPM

**ORDERING INFORMATION:** Housing, power module and trim each ordered separately.

Example: IC115LEDHSG	Example: IC115LEDPM-3K	Example: 835-WH
<p><b>Back Housing</b></p>  <p><b>IC115LEDHSG</b></p> 	<p><b>Power Module</b></p>  <p><b>IC115LEDPM</b></p> 	<p><b>Color Temperature</b></p> <p><b>3K</b> 3000K <b>41K</b> 4100K</p>
		<p><b>Trim/Description</b></p>  <p><b>835-WH</b> Full Opal Lens - White <b>835-BL</b> Full Opal Lens - Black</p>  <p><b>836-WH</b> Opal Lens with Grill - White <b>836-BL</b> Opal Lens with Grill - Black</p>  <p><b>837-WH</b> Opal Lens with Angled Louvers - White <b>837-BL</b> Opal Lens with Angled Louvers - Black</p> <p>Trim Size: 9 <sup>3</sup>/<sub>4</sub>" L x 3 <sup>5</sup>/<sub>8</sub>" H Trim Finish: WH - White, BL - Black.</p>